

Article no. 12277173



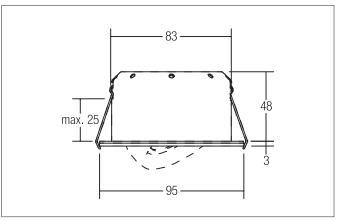

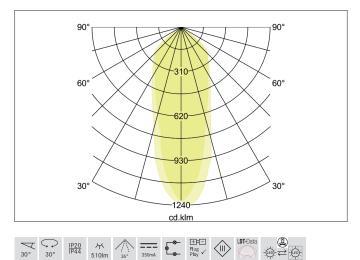

#### Tender

LED recessed spot, IP44, rotable and pivoted. Toolless ceiling installation by installation springs. Ceiling cut-out Ø 83 mm, Installation depth 48 mm, Outer diameter 95 mm, Weight 0,283 kg, Reflector silver with rotattionssymmetrical, deep, wide distributed light intensity. Cover plastic, transparent. Luminous flux 510 lm, Power 1 x 6 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 85, Housing material: Aluminium / Steel / Plastic, Colour: White structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP44 when installing in closed ceilings. For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

Article data	
Article no.	12277173
GTIN	4251433905660
Series name	INDIWO83-R
Short description	LED recessed spot, IP44, rotable and pivoted
Material	Aluminium / Steel / Plastic
Colour	White
Type of surface	Structure
Shape	Round
Outer diameter	95 mm
Built-in diameter	83 mm
Installation depth	48 mm
Hight	3 mm
Weight	0.283 kg
Conformance	CE, UKCA

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 23.01.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Article no. 12277173

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	510 lm
System efficiency	85 lm/W
Colour rendering	CRI > 85
Reflector	Faceted
Reflector colour	silver
Beam angle	36°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	6 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Degree of protection	IP44
Protection class on the ceiling side	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
Buib change possible	technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Rotable and pivoted
Swivel angle	30°
Rotation angle	30°
Max. ceiling thickness	25 mm
Material cover	Plastic, transparent

Packing data	
Gross weight	0.328 kg
Length of packaging	110 mm
Packaging width	100 mm
Packaging hight	85 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you
	support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 23.01.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Article no. 12277173

equired accessories tricle no.: 17662000 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf tricle no.: 17662010 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, ohne Konfektionierung imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf tricle no.: 17662020 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf tricle no.: 17613000
ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf rticle no.: 17662010 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, ohne Konfektionierung imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf rticle no.: 17662020 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
ower: 1 - 7,2 W, Plug&Play imensions: 68 mm x 35 mm x 21 mm :ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf rticle no.: 17662010 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, ohne Konfektionierung imensions: 68 mm x 35 mm x 21 mm :ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf rticle no.: 17662020 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm :ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
<pre>imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf rticle no.: 17662010 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, ohne Konfektionierung imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf rticle no.: 17662020 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&amp;Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf</pre>
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf rticle no.: 17662010 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, ohne Konfektionierung imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf rticle no.: 17662020 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
rticle no.: 17662010 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, ohne Konfektionierung imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf rticle no.: 17662020 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, ohne Konfektionierung imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf rticle no.: 17662020 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
ower: 1 - 7,2 W, ohne Konfektionierung imensions: 68 mm x 35 mm x 21 mm <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf</a> ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf</a>
ower: 1 - 7,2 W, ohne Konfektionierung imensions: 68 mm x 35 mm x 21 mm <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf</a> ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf</a>
imensions: 68 mm x 35 mm x 21 mm <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf</a> FD converter 350 mA, on/off switchable ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf</a>
rticle no.: 17662020 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm ttps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
ower: 1 - 7,2 W, Plug&Play + Anschlussbox imensions: 68 mm x 35 mm x 21 mm :tps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
imensions: 68 mm x 35 mm x 21 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
tps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
ED converter 350 mA, on/off switchable
ower: 1 - 15 W, Plug&Play
imensions: 115 mm x 34 mm x 19 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf
rticle no.: 17613010
ED converter 350 mA, on/off switchable
ower: 1 - 15 W, ohne Konfektionierung
imensions: 115 mm x 34 mm x 19 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613010_2021_DE.pdf
rticle no.: 17613020
ED converter 350 mA, on/off switchable ower: 1 - 15 W, Plug&Play + Anschlussbox
imensions: 115 mm x 34 mm x 19 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf
rticle no.: 17621000
ED converter 350 mA, on/off switchable
ower: 1 - 21 W, Plug&Play imensions: 128 mm x 50 mm x 13 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf
rticle no.: 17621010
ED converter 350 mA, on/off switchable
ower: 1 - 21 W, ohne Konfektionierung
imensions: 128 mm x 50 mm x 13 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621010_2021_DE.pdf
rticle no.: 17621020
ED converter 350 mA, on/off switchable
ower: 1 - 21 W, Plug&Play + Anschlussbox
imensions: 128 mm x 50 mm x 13 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf
rticle no.: 17663000
ED converter 350 mA, trailing-edge phase dimmable
ower: 2,8 - 7 W, Plug&Play
imensions: 110 mm x 50 mm x 19 mm
tps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf

Article no. 12277173

Optional accessories
Article no.: 3835
Plug & Play extension lead 350 mA
Dimensions: 500 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf
Article no.: 3836
Plug & Play extension lead 350 mA
Dimensions: 1,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf
Article no.: 3837
Plug & Play extension lead 350 mA
Dimensions: 2,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf