
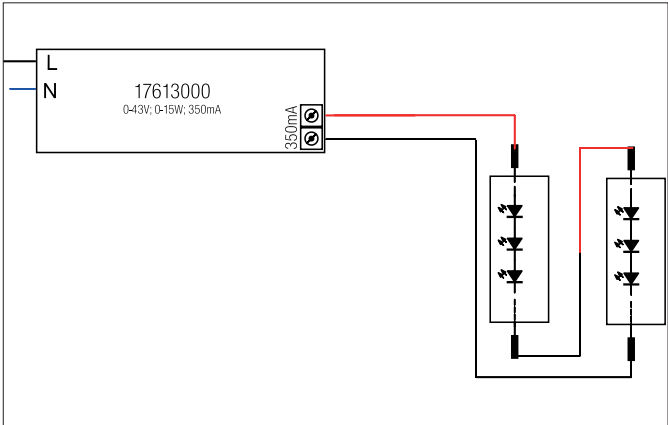


LED converter 350 mA, on/off switchable

Article no. 17613010

Light.
For Generations.

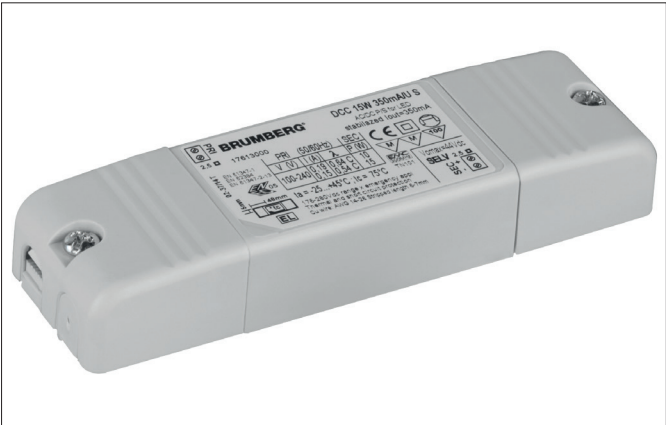

Tender

LED converter 350 mA, on/off switchable, white, Rectangular.This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 2.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 15 W, Dimmable: No, Control: on/off.

Article data	
Article no.	17613010
GTIN	4251433918523
Short description	LED converter 350 mA, on/off switchable
Material	Plastic
Colour	White
Shape	Rectangular
Length	115 mm
Width	34 mm
Hight	19 mm
Weight	0.065 kg
stamp	ENEC 05, EL

LED converter 350 mA, on/off switchable

Article no. 17613010

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	90 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	275 V
Protection class	II
Degree of protection	IP20
Power min	1 W
Power max.	15 W
Starting current	27 A (250 µs)
Suitable for emergency lighting	No
measure point (tc)	75 °C
Version	without
max. no. lights on B16 A	27
Output voltage max	43.00 V
Output voltage min.	2.00 V
Flicker value Pst LM	1.00
Control	on/off
Number of poles	2
Environment temperature (ta)	0°C up to 40°C
Measure point (tc)	max. +75 °C
Output current	350 mA

Packing data	
Gross weight	0.084 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>