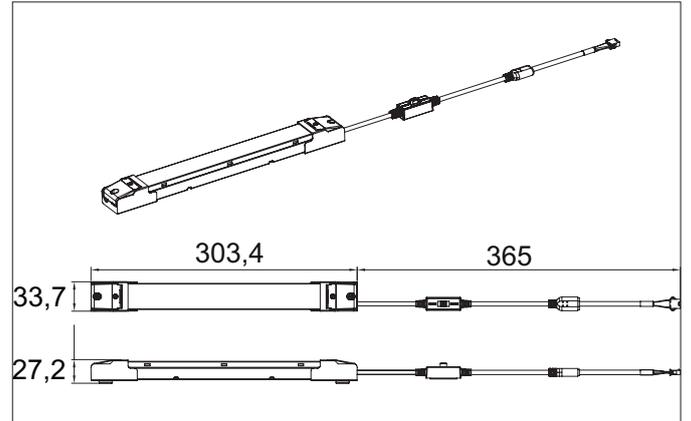



LINEO LED-driver 700 mA, on/off, simple execution
 Article no. 17812000

Tender

LED-driver 700 mA, on/off, simple execution, white, Rectangular. Material: Steel, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 40 W, Dimmable: No, Type of dimming: on/off.

Article data	
Article no.	17812000
GTIN	4255752526070
Series name	LINEO
Short description	LED-driver 700 mA, on/off, simple execution
Material	Steel
Colour	white
Shape	Rectangular
Length	304 mm
Width	34 mm
Height	24 mm
Scope of delivery	Plug&Play-Anschlussleitung, zur Aufnahme von 1 Stück LINEO - T5/T8 Sanierungsleuchte, Länge: 400 mm, inkl. Schalter zur Farbtemperatureinstellung (3.000 K / 4.000 K), inkl. 4 Stück selbstklebende Zuleitungshalter.
Weight	0.3 kg
stamp	ENEC 25, EL
Conformance	CE


LINEO LED-driver 700 mA, on/off, simple execution

Article no. 17812000

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	198 V
DC nominal voltage max	264 V
Protection class	I
Degree of protection	IP20
Power	7.5 W
Power max.	40 W
Output_ripple_current	5
Starting current	16.3A, 204 μ s
Suitable for emergency lighting	Yes
measure point (tc)	75 °C
Version	Plug&Play
Power factor	0.9
max. no. lights on B16 A	35
Output voltage max	54.00 V
Output voltage min.	15.00 V
Flicker value Pst LM	1.00
Stroboscopic effect value SVM	.40
Control	on/off
Number of poles	3
Environment temperature (ta)	-25 °C bis +40 °C
Measure point (tc)	max. +75 °C
Output current	700 mA
Safety devices against overvoltage	yes
Safety devices against thermal overload	yes

Packing data	
Gross weight	0.4 kg
Length of packaging	330 mm
Packaging width	50 mm
Packaging height	40 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>