

wall mounting socket outlet, fused - housing dimensions
 460x180, with residual current circuit breaker




Product description	
BALS-Prd.-Nr	15168
EAN	4024941151689
Product category	Wall mounting socket outlet, fused
Current	63A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~

Product description	
Frequency	50/60Hz
Protection degree	IP67
Colour code	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Housing bottom grey RAL 7035, Housing screws grey RAL 7035, Housing top grey RAL 7035, Operating window smoky topaz, Bayonet ring grey RAL 7035
Connection design	screw terminal as box terminal with Kontex-contact
Maximum conductor size	25.0 qmm
Cable entry	top entry M40 bottom entry M40/M32
Height	503mm
Width	180mm
Depth	192mm
Dimension of enclosure	460x180 mm (HxW)
Material of enclosure	Polycarbonate
Contacts	The contact carrier is made of polyamide, the contacts are brass nickel plated

Additional technical properties	
	The cable entry is one at top open and two at bottom closed
	with 4 pole 63/0.3A RCCB

Logistics data	
Weight/pcs	3.356 kg / Piece

Logistics data	
Packaging	Carton
Content amount	1 ST
EAN	4024941151689
Length	560 mm
Width	215 mm
Height	260 mm
Weight	3.818 kg
Volume	26,400 ccm

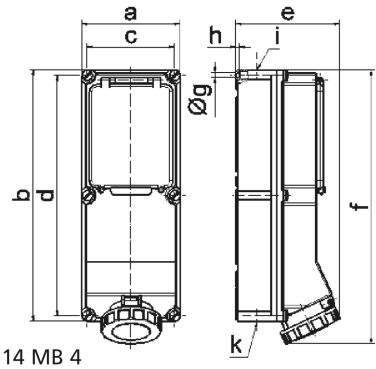

Ampere	63	63	63	125	125	
Polzahl	3	4	5	4	5	
a	180,0	180,0	180,0	180,0	180,0	
b	460,0	460,0	460,0	460,0	460,0	
c	160,0	160,0	160,0	160,0	160,0	
d	440,0	440,0	440,0	440,0	440,0	
e	191,0	191,0	191,0	210,0	210,0	
f	500,0	500,0	500,0	512,0	512,0	
g ø	8,3	8,3	8,3	8,3	8,3	
h	6,5	6,5	6,5	6,5	6,5	
i	M40	M40	M40	M40	M40	
k	M32/40	M32/40	M32/40	M40/50	M40/50	