

8571/12-506 Art. No. 150855



- Full compatibility between SolConeX and CES devices
- Wide temperature range for use
- High mechanical impact and shock resistance
- Perfect protection against the ingress of liquids and dust
- 3D data available to download from the website

WebCode **8571E**



R. STAHL Series 8571/12 SolConeX plugs for Zone 1/21 are 4- or 5-pole versions up to 32 A. The floating pins allow them to be inserted and removed quickly and easily. The pivoting strain relief makes it easier to install the cable. Self-cleaning and corrosion-free plug pins made from high-quality materials ensure optimum electrical contact.

Technical Data

Explosion Protection

Scope of validity	European Union (ATEX) IECEX
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 05.0024
IECEX gas explosion protection	Ex db eb IIC T6 ... T5 Gb
IECEX dust certificate	IECEX PTB 05.0024
IECEX dust explosion protection	Ex tb IIIC T60 °C ... T75 °C Db
ATEX gas certificate	PTB 04 ATEX 1060
ATEX gas explosion protection	⊕ II 2 G Ex db eb IIC T6 ... T5 Gb
ATEX dust certificate	PTB 04 ATEX 1060
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC T60 °C ... T75 °C Db
Certificates	ATEX (PTB), Brazil (ULB), China (CQST), EAC (ENDCE), IECEX (PTB), India (PESO), Korea (KGS), Taiwan (ITRI)
Notes	CCC certificate available from 2021 onward
Explosion protection note	Product label may vary. Series devices have certification according to ATEX and IECEX.

Electrical Data

Rated operational voltage AC	200/346 to 240/415 V AC
Rated operational current	max. 32 A
Mechanical service life	> 5x10 ³ plug cycles
Type of voltage	Low voltage
Frequency range	50 / 60 Hz

Ambient Conditions

Ambient temperature	-30 °C ... +40 °C (T6) -30 °C ... +55 °C (T5)
---------------------	--

8571/12-506 Art. No. 150855

Ambient Conditions

Ambient temperature	-86 °F ... +104 °F (T60 °C) -86 °F ... +131 °F (T75 °C)
---------------------	--

Mechanical Data

Degree of protection note	according to IEC/EN 60529
Schutzart IP (IEC 60079)	IP66
Enclosure material	Polyamide, Glass fibre reinforced
Silicone-free	Yes
Finely stranded connection cross section	2.5 – 10 mm ²
Connection cross-section AWG finely stranded	AWG 14 - AWG 8
Width	104 mm
Width, inches	4.09 in
Height	104 mm
Height, inches	4.09 in
Length	204 mm
Length, inches	8.03 in
Impact strength (IEC 60079)	7 J
Impact strength (IEC 62262)	IK10
Colour code	Red
Coding (clock hour position)	6
Series	SolConeX
Detailed number of poles	3 P + N + PE
Weight	0.6 kg
Weight	1.32 lb


Mounting / Installation

Connection	Screw terminal
------------	----------------

Components

Cable diameter	13 ... 25 mm
----------------	--------------

Technical Drawings – Subject to Alterations




Marking of connections

Front view of plug 3 P + N + PE

8571/12-506 Art. No. 150855


Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

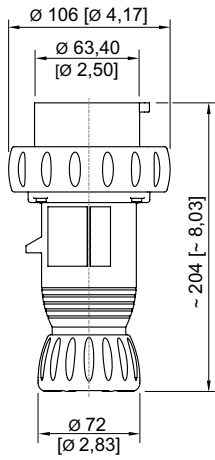

Plug 3 P + N + PE

Spare Parts

Protective cap for plugs 32 A



5 pole

Art. No.

150865

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.