


LED recessed spot
Artikel-Nr. 12262253

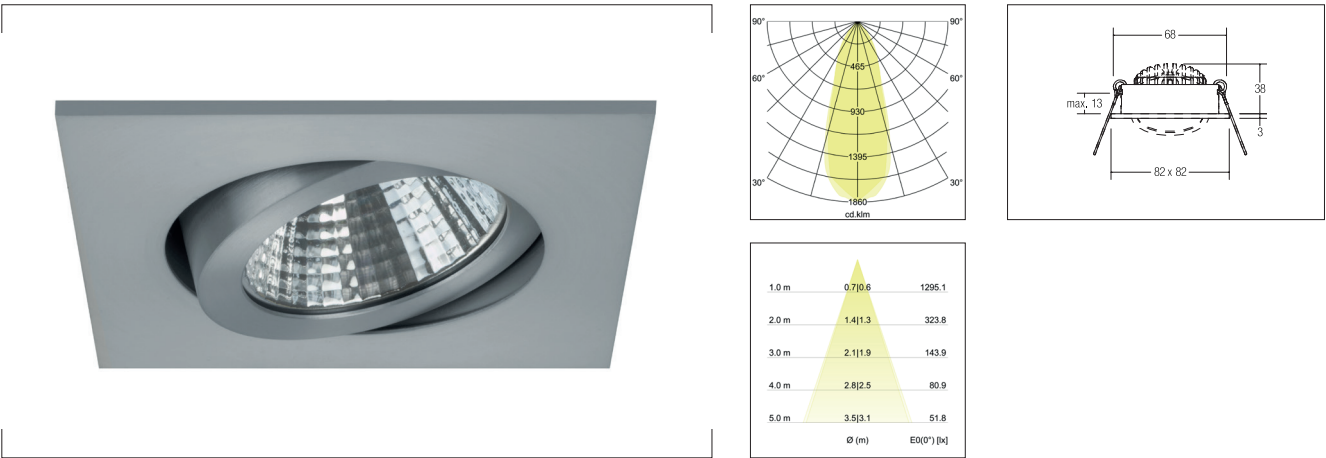

LED recessed spot, alu, square. In a compact design, for installation in tool-less rapid assembly systemsLamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 7W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 740lm, Colour temperature: 2.700 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: No.

Artikel-Nr.	12262253
Stand:	26.10.2021 01:45

Colour temperature	2700 K
Colour	Alu
Length	82 mm
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Plastic
Lamp holder	Plug&Play
Power	7 W
Lamp	LED
Colour rendering	CRI > 80
Built-in diameter	68 mm

Installation depth	38 mm
Current	350 mA
Luminous flux	770 lm
Degree of protection	IP20
Protection class	III
Adjustability	Pivoted
Length	82 mm
Width	82 mm
Swivel angle	30 °
Circuit type	Series conduction