




PHILIPS

CoreLine Panel OC

RC127V/RC128V

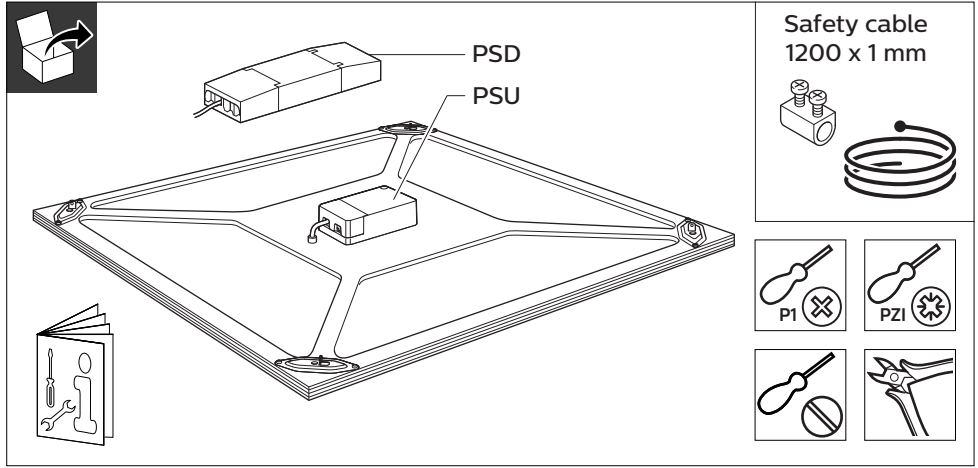

Safety cable
1200 x 1 mm



220V
240V

50Hz
60Hz



LEDs



Ta
25 °C

IK02

Max.
40 °C
Min.
10 °C



GLOW
WIRE
650 °C





	Driver	Lumen (lm)	CCT (K)	L x W x H (mm)	A x B (mm)	kg
RC127V	PSU(36W) / PSD(36W)	3400 3600	3000 4000	597 x 597 x 42	528 x 528	4.1
RC127V	PSU(36W) / PSD(36W)	3400 3600	3000 4000	1197 x 297 x 42	686 x 160	4.1
RC128V	PSU(36W) / PSD(36W)	3400 3600	3000 4000	622 x 622 x 42	553 x 553	4.3

Optional:

Surface mounted set:
RC125Z SMB W60L60
910930031018



PCV set:
RC125Z SMB-PLC
910930031318

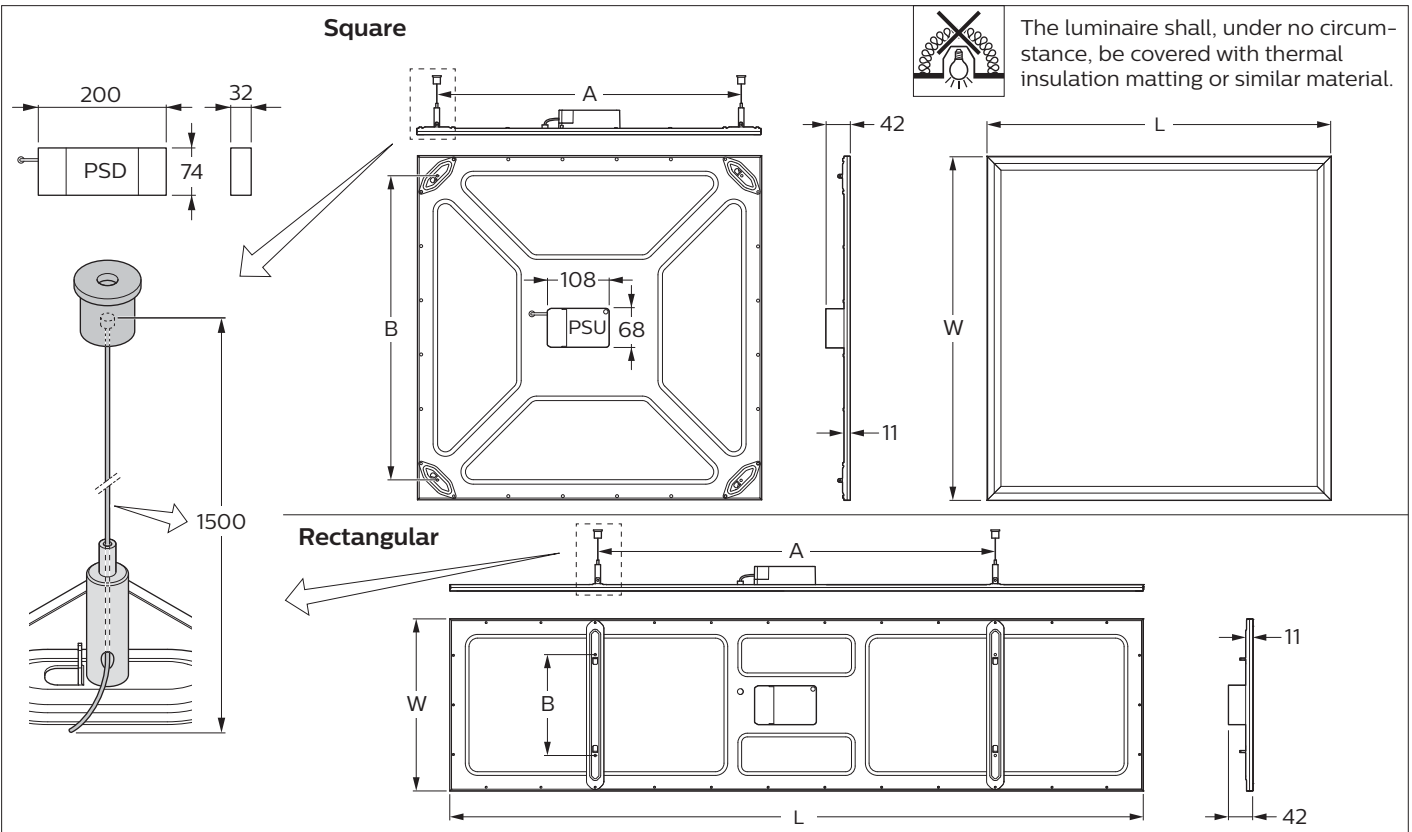

Suspension kits. (not included)

RC127Z SME
4 WH PSD

RC127Z SME
2 WH PSU

PSD

2a

PSU

2b

3

Suspended

1

4








5

Recessed

6

Safety cable

7

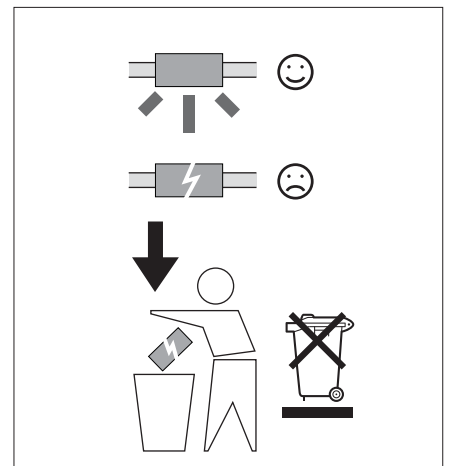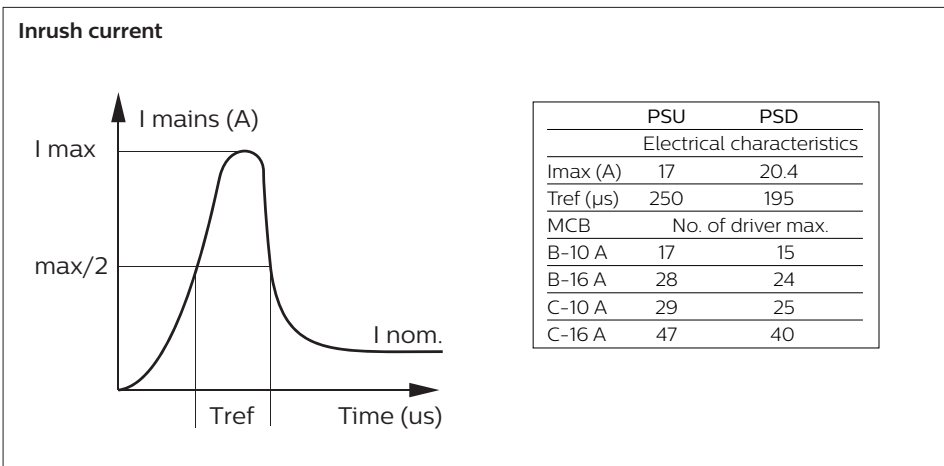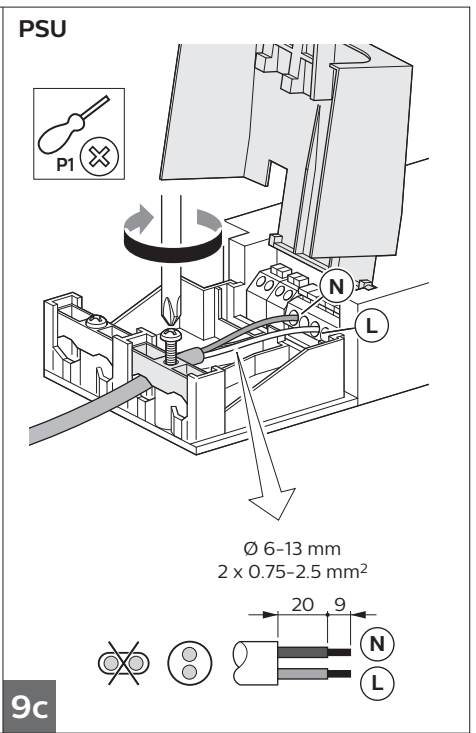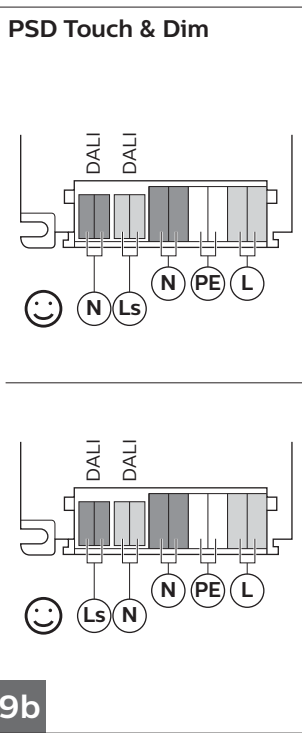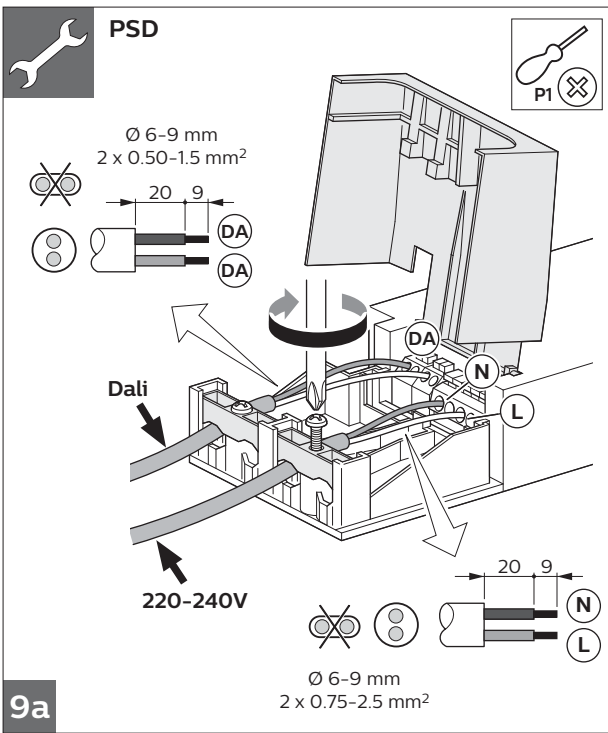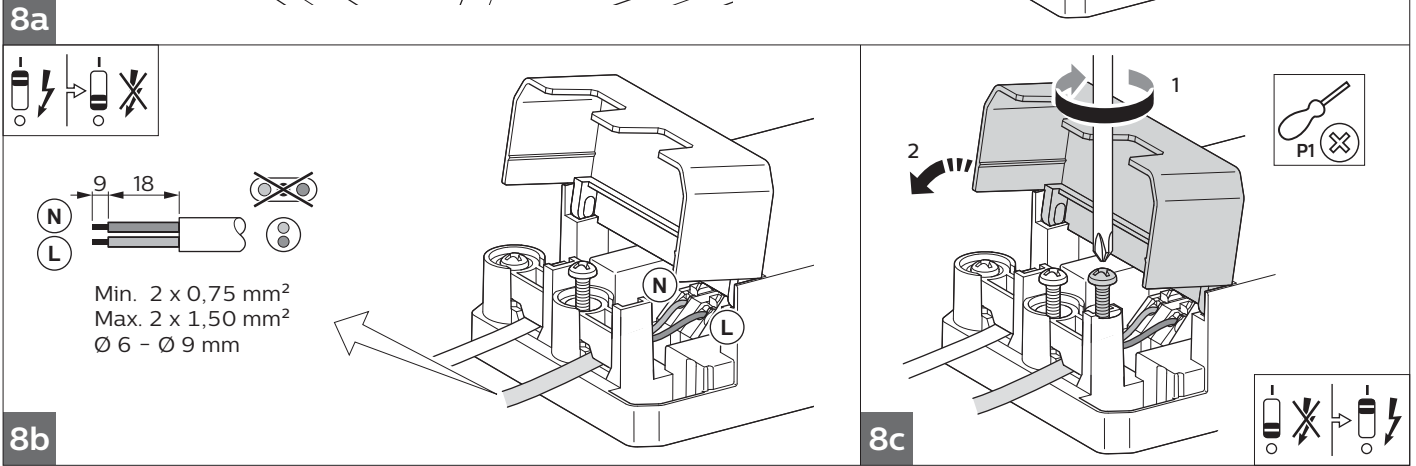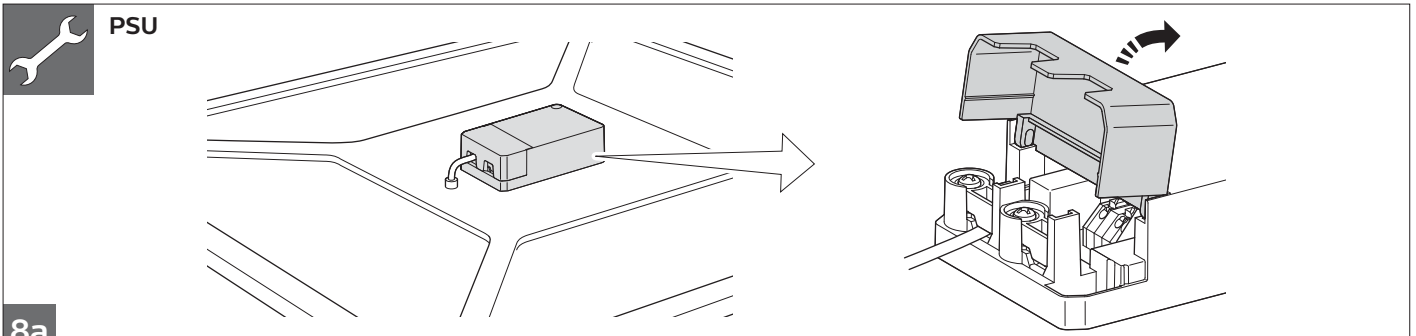



© 2017 Philips Lighting Holding B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting B.V.
The Netherlands