

wall mounting socket outlet, fused - housing dimensions 460x180, with mounting rail




Product description	
BALS-Prd.-Nr	15158
EAN	4024941151580
Product category	TE wall mounting socket outlet, fused
Current	125A
Number of poles	4p
Arrangement of phases	3P+PE
Position of earth contact	6 h
Voltage	380 - 415V~

Product description	
Frequency	50/60Hz
Protection degree	IP67
Colour code	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Housing bottom grey RAL 7035, Housing screws grey RAL 7035, Housing top grey RAL 7035, Operating window smoky topaz, Bayonet ring grey RAL 7035
Connection design	screw terminal as box terminal with Kontex-contact
Maximum conductor size	70 mm ² (possible limitation by the used cable entry)
Cable entry	top entry M40 bottom entry M50/M40
Height	512mm
Width	180mm
Depth	210mm
Dimension of enclosure	460x180 mm (HxW)
Material of enclosure	Polycarbonate
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	The cable entry is one at top and two at bottom open
	With mounting rail for 8 modules, vertical, Protective cover for fuses with stamping

Logistics data	
Weight/pcs	3.495 kg / Piece

Logistics data	
Packaging	Carton
Content amount	1 ST
EAN	4024941151580
Length	560 mm
Width	215 mm
Height	260 mm
Weight	3.957 kg
Volume	26,400 ccm

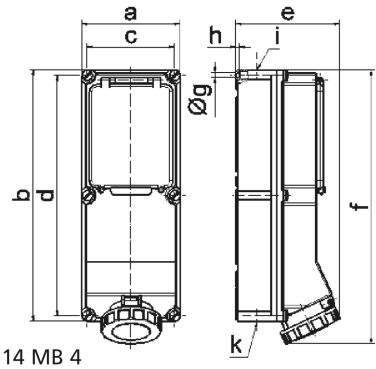

Ampere	63	63	63	125	125	
Polzahl	3	4	5	4	5	
a	180,0	180,0	180,0	180,0	180,0	
b	460,0	460,0	460,0	460,0	460,0	
c	160,0	160,0	160,0	160,0	160,0	
d	440,0	440,0	440,0	440,0	440,0	
e	191,0	191,0	191,0	210,0	210,0	
f	500,0	500,0	500,0	512,0	512,0	
g ø	8,3	8,3	8,3	8,3	8,3	
h	6,5	6,5	6,5	6,5	6,5	
i	M40	M40	M40	M40	M40	
k	M32/40	M32/40	M32/40	M40/50	M40/50	