
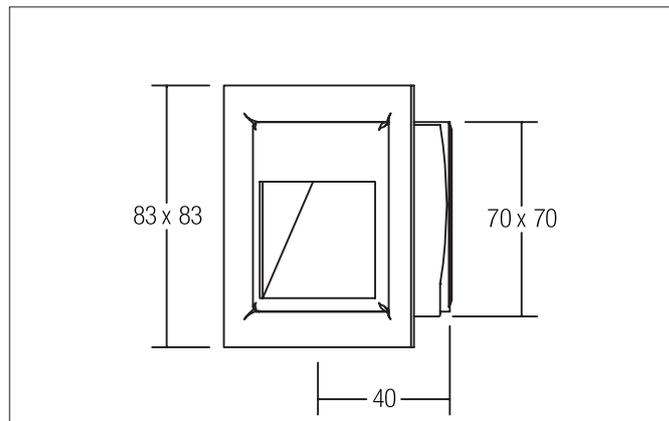


**VERTU LED recessed wall light**

Article no. P3729WW

**Tender**

LED recessed wall light, Square. Ceiling cut-out L x W 70 x 70 mm, Installation depth 40 mm, Length 83 mm, Width 83 mm, Weight 0,17 kg, asymmetric Luminous flux 40 lm, Power 1 x 1,2 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Steel, Colour: aluminum matt, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20. For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

Article data	
Article no.	P3729WW
GTIN	4250047749448
Series name	VERTU
Short description	LED recessed wall light
Material	Steel
Colour	aluminum matt
Type of surface	Matt
Shape	Square
Length	83 mm
Width	83 mm
Built-in length	70 mm
Built-in width	70 mm
Installation depth	40 mm
Hight	1.5 mm
Weight	0.17 kg
Conformance	CE, UKCA


VERTU LED recessed wall light

Article no. P3729WW

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Luminous flux	40 lm
System efficiency	33 lm/W
Colour rendering	CRI > 80
Reflector	Glossy
Light sharing	Asymmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	1.2 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material
Material cover	Without cover

Packing data	
Gross weight	0.194 kg
Length of packaging	85 mm
Packaging width	53 mm
Packaging height	84 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.


VERTU LED recessed wall light

Article no. P3729WW

Required accessories

Article no.: 17666000

LED converter 350 mA, on/off switchable

Power: 1 - 5 W, Plug&Play

Dimensions: 52 mm x 30 mm x 23 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17666000_2021_DE.pdf

Article no.: 17662020

LED converter 350 mA, on/off switchable

Power: 1 - 7,2 W, Plug&Play + Anschlussbox

Dimensions: 35 mm x 21 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf

Article no.: 17613000

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&Play

Dimensions: 115 mm x 34 mm x 19 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf

Article no.: 17621020

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&Play + Anschlussbox

Dimensions: 128 mm x 50 mm x 13 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf

Article no.: 17648020

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&Play + Anschlussbox

Dimensions: 166 mm x 46 mm x 34 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf
Optional accessories