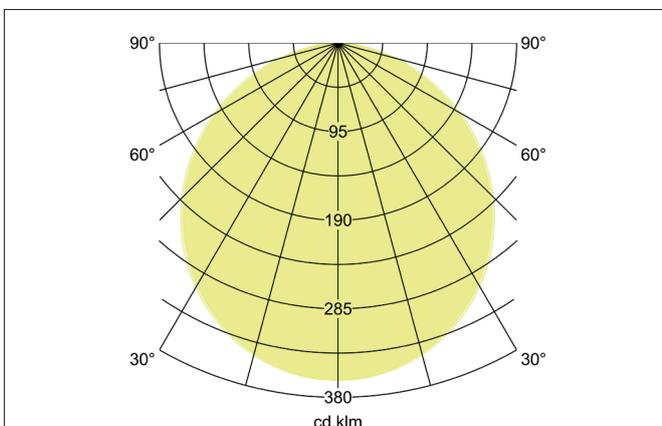
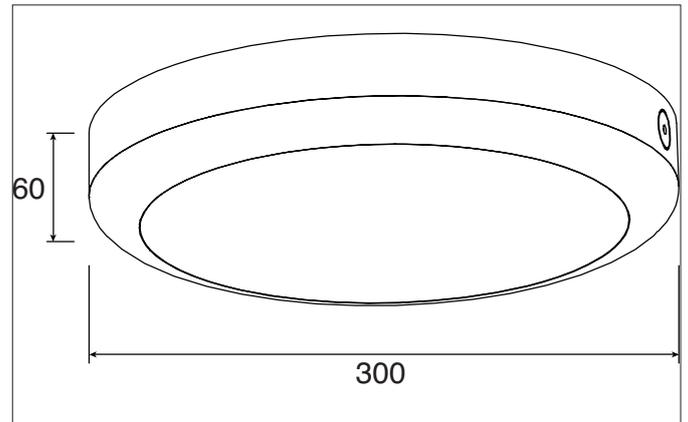


GAREK LED wall and ceiling surface mounted luminaire, IP65, on/off switchable

Article no. 32040073

Light.
For Generations.**Tender**

LED wall and ceiling surface mounted luminaire, IP65, on/off switchable, Round. Luminaire diameter 300.0 mm, Height 60.0 mm Weight 0.84 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 1.200 lm, Power 1 x 15 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Plastic / Acrylic, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK08 .With electronic driver, on/off switchable.

Product Benefits

- Ceiling or wall surface mounted luminaire made of impact-resistant plastic with a diameter of 300 mm, installation height 60 mm.
- Luminous flux 1,200 lm, IK08, IP65, housing made of PMMA plastic.
- Through various mounting location options the consistent lighting concepts can be realized with one article.

GAREK LED wall and ceiling surface mounted luminaire, IP65, on/off switchable

Article no. 32040073

Light.
For Generations.

Article data	
Article no.	32040073
GTIN	4251433928027
Series name	GAREK
Short description	LED wall and ceiling surface mounted luminaire, IP65, on/off switchable
Material	Plastic / Acrylic
Colour	White
Type of surface	Matt
Shape	Round
Outer diameter	300 mm
Height	60 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off switchable
Weight	0.840 kg
stamp	UKCA
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	1,200 lm
System efficiency	80 lm/W
Colour rendering	CRI > 80
Beam angle	110°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	15 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	II
Degree of protection	IP65
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-/Wall-mounted
Adjustability	Not adjustable
Impact resistance	IK08
Material cover	Plastic, opal

GAREK LED wall and ceiling surface mounted luminaire, IP65, on/**off switchable**

Article no. 32040073

Light.

For Generations.

Packing data	
Gross weight	1.026 kg
Length of packaging	315 mm
Packaging width	315 mm
Packaging height	65 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>