

wall mounting socket outlet - housing dimensions 126x83




| Product description       |                                                                                                                                                                                                          |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BALS-Prd.-Nr              | 110579                                                                                                                                                                                                   |
| EAN                       | 4024941938761                                                                                                                                                                                            |
| Product category          | TE wall mounting socket outlet Quick-Connect                                                                                                                                                             |
| Current                   | 32A                                                                                                                                                                                                      |
| Number of poles           | 5p                                                                                                                                                                                                       |
| Arrangement of phases     | 3p+N+PE                                                                                                                                                                                                  |
| Position of earth contact | 1 h                                                                                                                                                                                                      |
| Voltage                   | > 50V for all other not classified voltages and/or frequencies. This time position can additionally process in special applications, in which a distinction to standardized positions needed to be used. |

| Product description    |                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------|
| Protection degree      | IP44                                                                                                     |
| Colour code            | grey RAL 7035                                                                                            |
| Colour of appliance    | Hinged lid grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Collar grey RAL 7035  |
| Connection design      | screwless spring terminals with Kontex-Kontakt                                                           |
| Maximum conductor size | 10,0 qmm                                                                                                 |
| Cable entry            | 1xM25 top, 2xM25 bottom                                                                                  |
| Height                 | 157mm                                                                                                    |
| Width                  | 83mm                                                                                                     |
| Depth                  | 136mm                                                                                                    |
| Dimension of enclosure | 126x83 mm (HxW)                                                                                          |
| Material of enclosure  | Polyamide                                                                                                |
| Contacts               | the contacts are brass nickel plated, The contact carrier is made of high temperature resistant material |

| Additional technical properties |                                                             |
|---------------------------------|-------------------------------------------------------------|
|                                 | The cable entry is one at top open and two at bottom closed |
|                                 | Lower part of housing rotatable by 180°                     |
|                                 | 4 cut out fixing holes in the lower part of housing         |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.39 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Bag           |
| Content amount | 1 ST          |
| EAN            | 4024941938761 |
| Length         | 136 mm        |
| Width          | 83 mm         |
| Height         | 157 mm        |
| Weight         | 0.391 kg      |
| Volume         | 1,772.216 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941836111 |
| Length         | 330 mm        |
| Width          | 216 mm        |
| Height         | 260 mm        |
| Weight         | 4.126 kg      |
| Volume         | 17,062.5 ccm  |

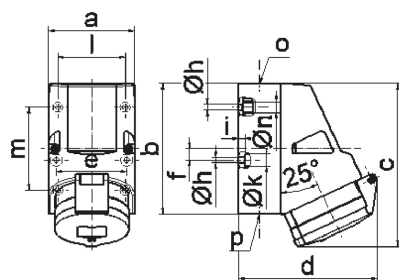

1 MB 2

| Ampere<br>Polzahl | 16<br>4 | 16<br>5 | 32<br>3 | 32<br>4 | 32<br>5 |  |
|-------------------|---------|---------|---------|---------|---------|--|
| a                 | 83,0    | 83,0    | 83,0    | 83,0    | 83,0    |  |
| b                 | 126,0   | 126,0   | 126,0   | 126,0   | 126,0   |  |
| c                 | 153,0   | 155,0   | 155,0   | 155,0   | 155,0   |  |
| d                 | 127,0   | 130,0   | 130,0   | 130,0   | 136,0   |  |
| e                 | 68,0    | 68,0    | 68,0    | 68,0    | 68,0    |  |
| f                 | 11,0    | 11,0    | 11,0    | 11,0    | 11,0    |  |
| h ø               | 5,5     | 5,5     | 5,5     | 5,5     | 5,5     |  |
| i                 | 6,5     | 6,5     | 6,5     | 6,5     | 6,5     |  |
| k ø               | 12,0    | 12,0    | 12,0    | 12,0    | 12,0    |  |
| l                 | 65,0    | 65,0    | 65,0    | 65,0    | 65,0    |  |
| m                 | 80,0    | 80,0    | 80,0    | 80,0    | 80,0    |  |
| n ø               | 10,0    | 10,0    | 10,0    | 10,0    | 10,0    |  |
| o                 | M25     | M25     | M25     | M25     | M25     |  |
| p                 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 |  |
| Leiter mm² min    | 1,5     | 1,5     | 2,5     | 2,5     | 2,5     |  |
| Leiter mm² max    | 4       | 4       | 10      | 10      | 10      |  |