

8560/51-4083 Art. No. 213078



- Cost-effective miniature fuse for control circuits
- Disconnect characteristics of fast, medium fast and slow
- Terminal cover with finger protection: IP20

WebCode **8560A**



The R. STAHL Series 8560 small fuse element is a cost-effective miniature fuse for control circuits. It is designed for rated operational voltages up to 500 V and rated operational currents up to 6.3 A and is available with various disconnect characteristics. It is snap-mounted on normal rails (TS 15, 35, 32). The terminal cover with finger protection meets the specifications of the degree of protection IP20.

Technical Data

Explosion Protection

Application range (zones)	1 2
IECEx gas certificate	IECEx PTB 06.0056U
IECEx gas explosion protection	Ex e mb II T..
ATEX gas certificate	PTB 99 ATEX 2158 U
ATEX gas explosion protection	Ex II 2 G Ex e mb II T..
EAC certificate	TS RU S-DE.GB04.B.00079
EAC gas explosion protection	Ex e m IIU Ex e m IU
Certificates	ATEX (PTB), Brazil (ULB), Canada (UL), EAC (STV), IECEx (PTB)

Electrical Data

Rated operational voltage DC	60 V
Short-circuit protection max.	35 A
Characteristic	Fast-acting

Ambient Conditions


Ambient temperature	-50 °C ... +70 °C
---------------------	-------------------

Mechanical Data

Degree of protection (IP)	IP20
Enclosure material	Polyamide
Packaging unit	5
Weight	0.24 kg
Weight	0.53 lb


8560/51-4083 Art. No. 213078

Technical Drawings – Subject to Alterations

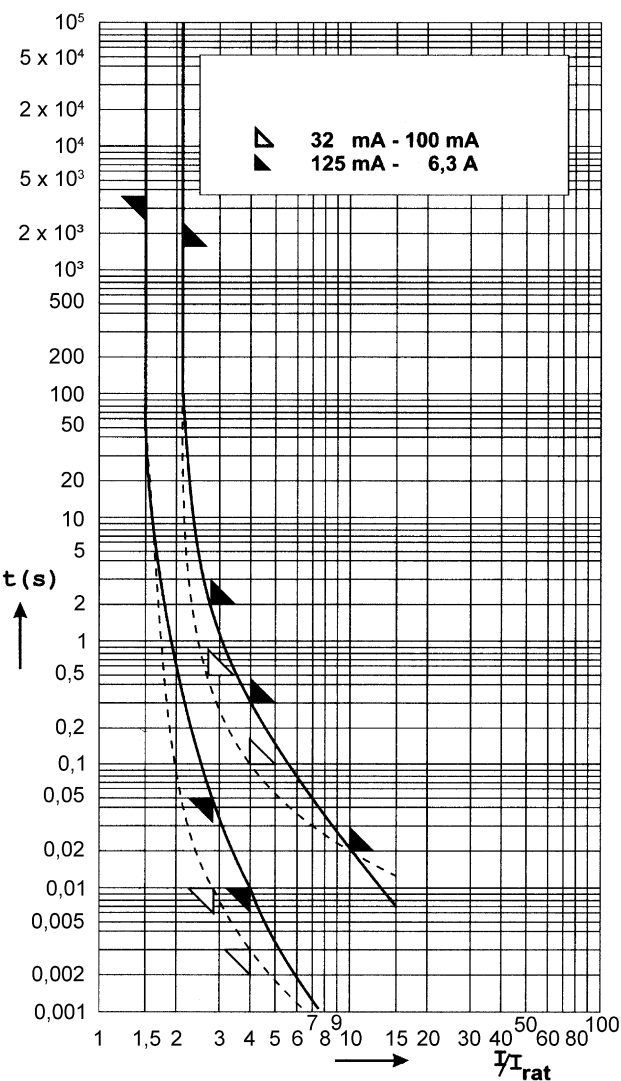

8560/51-...3 250 V quick acting

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

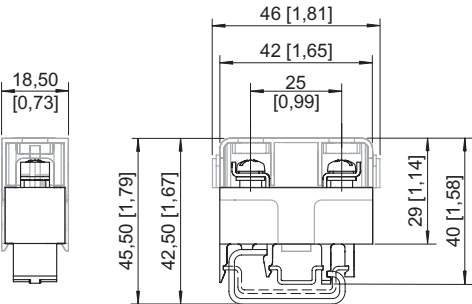

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.