

panel mounting socket outlet, angled - flange 85x85,  
fixing centers 70x70




| Product description       |                                      |
|---------------------------|--------------------------------------|
| BALS-Prd.-Nr              | 1264                                 |
| EAN                       | 4024941012645                        |
| Product category          | Panel mounting socket outlet, angled |
| Current                   | 32A                                  |
| Number of poles           | 5p                                   |
| Arrangement of phases     | 3p+N+PE                              |
| Position of earth contact | 6 h                                  |
| Voltage                   | 200/346 - 240/415V~                  |

| Product description            |                                                                              |
|--------------------------------|------------------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                                      |
| Protection degree              | IP67                                                                         |
| Colour code                    | red RAL 3000                                                                 |
| Colour of appliance            | Hinged lid red RAL 3000, Bayonet ring grey RAL 7035, Enclosure grey RAL 7035 |
| Connection design              | with screw terminal                                                          |
| Maximum conductor size         | 10,0 qmm                                                                     |
| Cable entry                    | other                                                                        |
| Height                         | 108mm                                                                        |
| Width                          | 101mm                                                                        |
| Depth                          | 99mm                                                                         |
| Flange size vertical in mm     | 85mm                                                                         |
| Flange size horizontal in mm   | 85mm                                                                         |
| Drill hole dist. vertical mm   | 70mm                                                                         |
| Drill hole dist. horizontal mm | 70mm                                                                         |
| Material of enclosure          | Polyamide                                                                    |
| Contacts                       | The contact carrier is made of polyamide, The contacts are brass             |

| Additional technical properties |                        |
|---------------------------------|------------------------|
|                                 | The inclination is 20° |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.256 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941012645    |
| Length         | 99 mm            |
| Width          | 101 mm           |
| Height         | 108 mm           |
| Weight         | 0.257 kg         |
| Volume         | 1,079.892 ccm    |
| Packaging      | Carton           |
| Content amount | 10 ST            |
| EAN            | 4024941970846    |
| Length         | 295 mm           |
| Width          | 185 mm           |
| Height         | 215 mm           |
| Weight         | 2.724 kg         |
| Volume         | 9,975 ccm        |

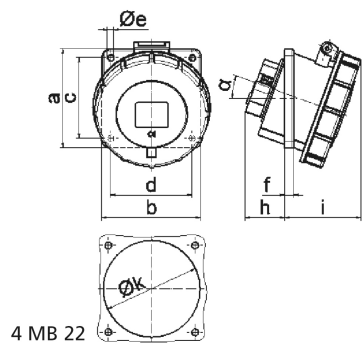

| Ampere         | 16   | 16   | 16   | 32   | 32   | 32   |  |
|----------------|------|------|------|------|------|------|--|
| Polzahl        | 3    | 4    | 5    | 3    | 4    | 5    |  |
| a              | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 |  |
| b              | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 |  |
| c              | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 |  |
| d              | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 |  |
| e ø            | 5,5  | 5,5  | 5,5  | 5,5  | 5,5  | 5,5  |  |
| f              | 8,0  | 8,0  | 8,0  | 8,0  | 8,0  | 8,0  |  |
| h              | 30,0 | 30,0 | 30,0 | 50,0 | 50,0 | 34,0 |  |
| i              | 55,0 | 57,0 | 59,0 | 67,0 | 67,0 | 69,0 |  |
| k              | 57,0 | 65,0 | 70,0 | 78,0 | 78,0 | 78,0 |  |
| l              | 57,0 | 65,0 | 70,0 | 78,0 | 78,0 | 78,0 |  |
| α              | 20°  | 20°  | 20°  | 20°  | 20°  | 20°  |  |
| Leiter mm² min | 1,5  | 1,5  | 1,5  | 2,5  | 2,5  | 2,5  |  |
| Leiter mm² max | 4    | 4    | 4    | 10   | 10   | 10   |  |