


LED surface mounted downlight TUBIC
Artikel-Nr. 12042173

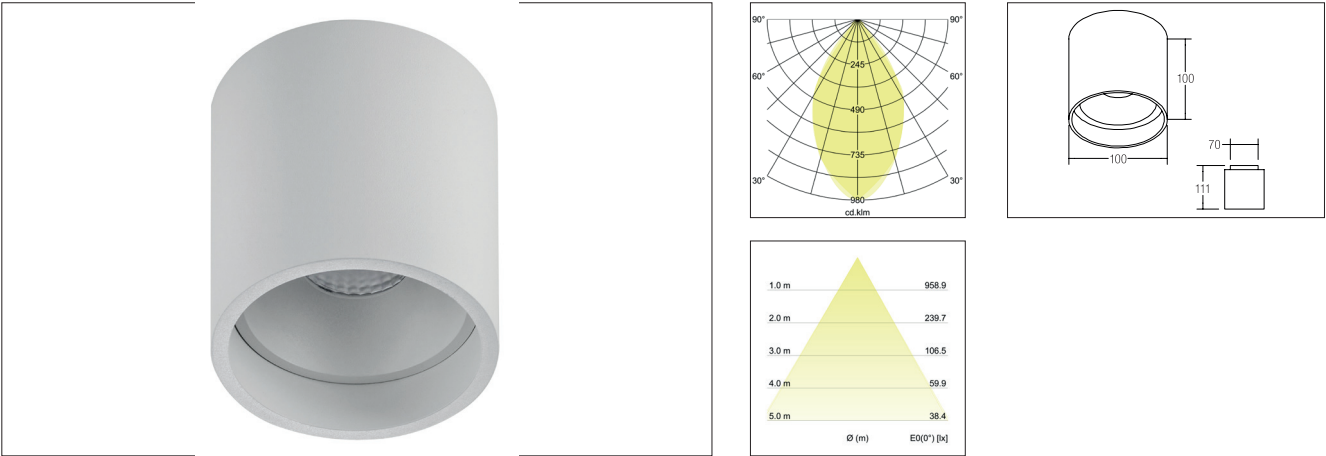

LED surface mounted downlight TUBIC, white, round. Surface mounting, Ceiling-mounted. LED ceiling mounted downlight with 9.5 W / 900 lm direct and 1.5 W / 150 lm indirect light component. Mounting method: Surface mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 11W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 1.050lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 60°, Adjustability: Not adjustable, With control gear: Yes, Control: on/off.

Artikel-Nr.	12042173
Stand:	07.12.2021 11:34

Colour temperature	3000 K
Colour	White
Beam angle	60 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Plastic
Power	11 W
Lamp	LED
scope of delivery	Incl. converter for connection to the 230-V mains voltage

Colour rendering	CRI > 90
Control	on/off
Outer diameter	100 mm
Voltage	230V AC 50Hz
Degree of protection	IP20
Protection class	I
Adjustability	Not adjustable
Aufbauhöhe	111 mm
Circuit type	Parallel conduction