

wall mounting appliance inlet - with closure cap




| Product description       |                               |
|---------------------------|-------------------------------|
| BALS-Prd.-Nr              | 24023                         |
| EAN                       | 4024941240239                 |
| Product category          | Wall mounting appliance inlet |
| Current                   | 32A                           |
| Number of poles           | 3p                            |
| Arrangement of phases     | 2P+PE                         |
| Position of earth contact | 6 h                           |
| Voltage                   | 200 - 250V~                   |
| Frequency                 | 50/60Hz                       |

| Product description    |                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Protection degree      | IP67                                                                                                                                 |
| Colour code            | blue RAL 5015                                                                                                                        |
| Colour of appliance    | Housing bottom grey RAL 7035, Housing top grey RAL 7035, Collar blue RAL 5015, Bayonet ring grey RAL 7035, Closure cap grey RAL 7035 |
| Connection design      | with screw terminal                                                                                                                  |
| Maximum conductor size | 6,0 qmm                                                                                                                              |
| Cable entry            | top entry M25                                                                                                                        |
| Height                 | 148mm                                                                                                                                |
| Width                  | 94mm                                                                                                                                 |
| Depth                  | 121mm                                                                                                                                |
| Dimension of enclosure | 75x90 mm (HxW)                                                                                                                       |
| Material of enclosure  | Polyamide                                                                                                                            |
| Contacts               | The contact carrier is made of polyamide, the contacts are brass nickel plated                                                       |

| Additional technical properties |                                                              |
|---------------------------------|--------------------------------------------------------------|
|                                 | The cable entry is one at top open and one rear sided closed |
|                                 | With closure cap                                             |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.368 kg / Piece |
| Packaging      | Bag              |

| Logistics data |               |
|----------------|---------------|
| Content amount | 1 ST          |
| EAN            | 4024941240239 |
| Length         | 121 mm        |
| Width          | 94 mm         |
| Height         | 148 mm        |
| Weight         | 0.369 kg      |
| Volume         | 1,683.352 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941940481 |
| Length         | 330 mm        |
| Width          | 216 mm        |
| Height         | 260 mm        |
| Weight         | 3.906 kg      |
| Volume         | 17,062.5 ccm  |

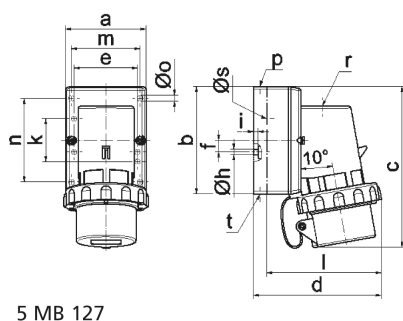

| Ampere  | 16      | 16      | 16    | 32    | 32    | 32    |
|---------|---------|---------|-------|-------|-------|-------|
| Polzahl | 3       | 4       | 5     | 3     | 4     | 5     |
| a       | 64,0    | 75,0    | 84,0  | 90,0  | 90,0  | 90,0  |
| b       | 87,0    | 100,0   | 84,0  | 75,0  | 75,0  | 75,0  |
| c       | 137,0   | 151,0   | 137,0 | 147,0 | 147,0 | 148,0 |
| d       | 112,0   | 119,0   | -     | 122,0 | 122,0 | 123,0 |
| e       | 51,0    | 59,0    | -     | -     | -     | -     |
| f       | -       | 11,0    | -     | -     | -     | -     |
| h ø     | 4,1     | 5,1     | -     | -     | -     | -     |
| i       | 4,5     | 4,5     | -     | -     | -     | -     |
| k       | 40,0    | -       | -     | -     | -     | -     |
| l       | -       | -       | 111,0 | -     | -     | -     |
| m       | -       | -       | 64,0  | 78,0  | 78,0  | 78,0  |
| n       | -       | -       | 64,0  | 45,0  | 45,0  | 45,0  |
| o ø     | -       | -       | 5,5   | 5,5   | 5,5   | 5,5   |
| p       | M20     | M20     | -     | -     | -     | -     |
| r       | -       | -       | M20   | M25   | M25   | M25   |
| s ø     | -       | -       | 23,0  | 29,0  | 29,0  | 29,0  |
| t       | für M20 | für M20 | -     | -     | -     | -     |