

wall mounting socket outlet - with external fixing




| Product description       |                                           |
|---------------------------|-------------------------------------------|
| BALS-Prd.-Nr              | 11922                                     |
| EAN                       | 4024941119221                             |
| Product category          | Wall mounting socket outlet Quick-Connect |
| Current                   | 32A                                       |
| Number of poles           | 4p                                        |
| Arrangement of phases     | 3P+PE                                     |
| Position of earth contact | 6 h                                       |
| Voltage                   | 380 - 415V~                               |
| Frequency                 | 50/60Hz                                   |

| Product description    |                                                                                                      |
|------------------------|------------------------------------------------------------------------------------------------------|
| Protection degree      | IP44                                                                                                 |
| Colour code            | red RAL 3000                                                                                         |
| Colour of appliance    | Hinged lid red RAL 3000, Collar red RAL 3000, Housing top red RAL 3000, Housing bottom grey RAL 7035 |
| Connection design      | screwless spring terminals with Kontex-Kontakt                                                       |
| Maximum conductor size | 10,0 qmm                                                                                             |
| Cable entry            | top entry M25                                                                                        |
| Height                 | 143mm                                                                                                |
| Width                  | 94mm                                                                                                 |
| Depth                  | 103mm                                                                                                |
| Dimension of enclosure | 92x94 mm (HxW)                                                                                       |
| Material of enclosure  | Polyamide                                                                                            |
| Contacts               | The contact carrier is made of polyamide, The contacts are brass                                     |

| Additional technical properties |                                                             |
|---------------------------------|-------------------------------------------------------------|
|                                 | The cable entry is one at top open and one at bottom closed |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.26 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941119221 |
| Length         | 103 mm        |
| Width          | 94 mm         |
| Height         | 143 mm        |
| Weight         | 0.261 kg      |
| Volume         | 1,384.526 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941957571 |
| Length         | 325 mm        |
| Width          | 217 mm        |
| Height         | 210 mm        |
| Weight         | 2.806 kg      |
| Volume         | 13,588.4 ccm  |

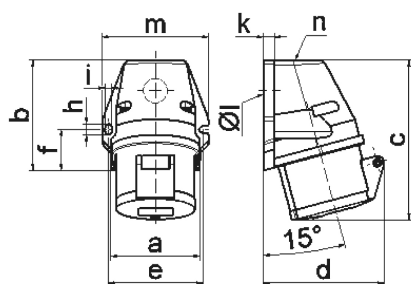

1 MB 19

| Ampere Polzahl | 16 3  | 16 4  | 16 5  | 32 3  | 32 4  | 32 5  |
|----------------|-------|-------|-------|-------|-------|-------|
| a              | 59,5  | 72,4  | 72,4  | 79,1  | 79,1  | 79,1  |
| b              | 90,0  | 90,0  | 90,0  | 92,0  | 92,0  | 92,0  |
| c              | 130,0 | 130,0 | 131,0 | 142,0 | 142,0 | 142,0 |
| d              | 85,0  | 96,0  | 98,0  | 103,0 | 103,0 | 106,0 |
| e              | 62,0  | 77,0  | 77,0  | 84,0  | 84,0  | 84,0  |
| f              | 33,5  | 33,5  | 33,5  | 30,0  | 30,0  | 30,0  |
| h              | 9,0   | 9,0   | 9,0   | 9,0   | 9,0   | 9,0   |
| i              | 5,5   | 5,5   | 5,5   | 5,5   | 5,5   | 5,5   |
| k              | 8,0   | 9,0   | 9,0   | 9,0   | 9,0   | 9,0   |
| l ø            | 21,0  | 21,0  | 21,0  | 21,0  | 21,0  | 21,0  |
| m              | 72,0  | 87,0  | 87,0  | 94,0  | 94,0  | 94,0  |
| n              | M20   | M25   | M25   | M25   | M25   | M25   |
| Leiter mm² min | 1,5   | 1,5   | 1,5   | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 4     | 4     | 4     | 10    | 10    | 10    |