BRUMBERG

LED power supply 12 V DC, on/off switchable

Article no. 17121000

Light.
For Generations.

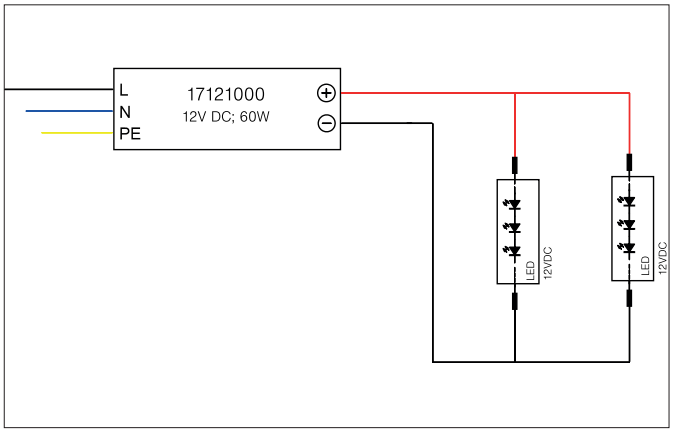

12 V

Tender
LED power supply 12 V DC, on/off switchable, white, Rectangular.This power supply unit is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. Material: Aluminium, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) I, Voltage: 12 V DC, Power: 60 W, Dimmable: No, Control: on/off.

Article data	
Article no.	17121000
GTIN	4251433922087
Short description	LED power supply 12 V DC, on/off switchable
Material	Aluminium
Colour	White
Shape	Rectangular
Length	180 mm
Width	63 mm
Hight	36 mm
Weight	0.676 kg
Length of the connection line	300 mm
stamp	ENEC, MM
Conformance	CE

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 24.10.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG

LED power supply 12 V DC, on/off switchable

Article no. 17121000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	200 V
AC nominal voltage max	230 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	142 V
DC nominal voltage max	431 V
Protection class	I
Degree of protection	IP65
Power min	1 W
Power max.	60 W
Output_ripple_current	150
Starting current	50 A (350 µs)
Suitable for emergency lighting	No
measure point (tc)	85 °C
Power factor	0.95
max. no. lights on B16 A	5
max. no. lights on C16 A	8
Output voltage max	13.20 V
Output voltage min.	10.80 V
Control	on/off
Connection type-primary	Cable
Connection type-secondary	Open ends
Number of poles	3
Enviroment temprature (ta)	-40 °C up to +80 °C
Measure point (tc)	max. +85 °C
Average nominal lifespan	50000 h
Output current	5 A mA
Length of the connection line	300 mm

Packing data	
Gross weight	0.72 kg
Length of packaging	240 mm
Packaging width	85 mm
Packaging hight	45 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 24.10.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/