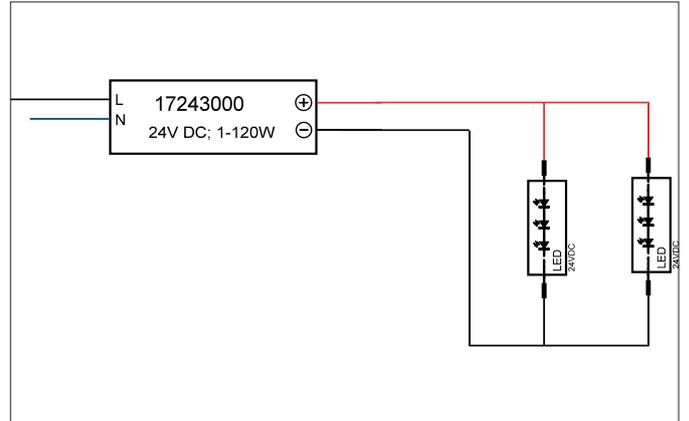


LED power supply 24 V DC, on/off switchable
 Article no. 17243000

Tender

LED power supply unit 24 V DC, switchable, white, rectangular. Material: Plastic, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 120 W, Dimmable: No, Type of dimming: switchable.

Article data	
Article no.	17243000
GTIN	4251433939078
Short description	LED power supply 24 V DC, on/off switchable
Material	Plastic
Colour	White
Shape	Rectangular
Length	300 mm
Width	40 mm
Height	30 mm
Weight	0.431 kg
stamp	ENEC, MM
Conformance	CE

LED power supply 24 V DC, on/off switchable

Article no. 17243000

Operating technology of driver	
AC nominal voltage min	220 V
AC nominal voltage max	240 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	II
Degree of protection	IP20
Power min	1 W
Power max.	120 W
Output_ripple_current	3
Starting current	35 A, 320 µs
Suitable for emergency lighting	No
measure point (tc)	90 °C
Power factor	0.98
max. no. lights on B10 A	7
max. no. lights on B16 A	12
max. no. lights on C16 A	20
max. no. lights on C10 A	12
Output voltage max	25.20 V
Output voltage min.	22.80 V
Control	on/off
Connection type-primary	Screw-in connection
Connection type-secondary	Screwed terminal
Number of poles	2
Environment temperature (ta)	-20°C up to +45°C
Measure point (tc)	max. +90°C
Average nominal lifespan	50000 h

Packing data	
Gross weight	0.47 kg
Length of packaging	45 mm
Packaging width	35 mm
Packaging height	330 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>