

# **BRUMBERG**

### LED-round converter 350 mA, trailing-edge phase dimmer

Article no. 17652000

Light. For Generations.

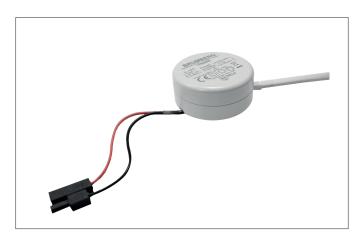

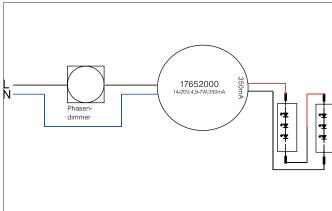



#### Tender

LED-round converter 350 mA, trailing-edge phase dimmer, white, Round.Lamp holder: Plug&Play, Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 7 W, Dimmable: Yes, Control: Trailing-edge phase.

| Article data                  |  |
|-------------------------------|--|
| Article no.                   | 17652000   |
| GTIN                          | 4251433916581  |
| Short description             | LED-round converter 350 mA, trailing-edge phase dimmer |
| Material                      | Plastic  |
| Colour                        | White  |
| Shape                         | Round  |
| Outer diameter                | 51 mm  |
| Hight                         | 24 mm  |
| Scope of delivery             | Plug&Play-Ausgangsleitung, Länge 110 mm                |
| Weight                        | 0.047 kg   |
| Length of the connection line | 110 mm   |
| Conformance                   | CE   |

## **BRUMBERG**

### LED-round converter 350 mA, trailing-edge phase dimmer

Article no. 17652000

Light. For Generations.

| Operating technology of driver  |                     |
|---------------------------------|---------------------|
| AC nominal voltage min          | 200 V               |
| AC nominal voltage max          | 264 V               |
| Frequency min                   | 50 Hz               |
| Frequency max                   | 60 Hz               |
| Protection class                |                     |
| Degree of protection            | IP20                |
| Power min                       | 4.9 W               |
| Power max.                      | 7 W                 |
| Starting current                | 3 A (100 μs)        |
| Suitable for emergency lighting | No                  |
| measure point (tc)              | 85 °C               |
| Version                         | Plug&Play           |
| Power factor                    | 0.5                 |
| Output voltage max              | 20.00 V             |
| Output voltage min.             | 14.00 V             |
| Control                         | Trailing-edge phase |
| Number of poles                 | 2                   |
| Flicker-free                    | Yes                 |
| Enviroment temprature (ta)      | -20 °C bis +50 °C   |
| Measure point (tc)              | max. +85 °C         |
| Average nominal lifespan        | 30000 h             |
| Output current                  | 350 mA              |
| Length of the connection line   | 110 mm              |

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 0.063 kg   |
| Length of packaging     | 70 mm  |
| Packaging width         | 47 mm  |
| Packaging hight         | 81 mm  |
|                         | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.  |
| Disposal at end of life | By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |