

CMP-20-PXSS2K Art. No. 109441



- Cable entry for unarmoured cables and cables with wire-braid armouring
- Designed to prevent cold flow
- Worldwide certification in accordance with IECEx, ATEX, UL and cCSAus

WebCode **PXSS2KA**



PXSS2K series metal Ex d and Ex e barrier cable entries are suitable for unarmoured cables and cables with wire-braid armouring. They are equipped with a compound barrier. They feature a displacement seal for the outer cable sheath coupled with a double flood seal with integral protection.

### Technical Data

#### Explosion Protection

Ex version	Ex e & Ex d & Ex nR & Ex ta
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX CML 18.0182X
IECEX gas explosion protection	Ex db IIC Gb
IECEX dust certificate	IECEX CML 18.0182X
IECEX dust explosion protection	Ex ta IIIC Da
IECEX firedamp certificate	IECEX SIM 14.0008 X
IECEX firedamp protection	Ex db I Mb
IECEX firedamp protection	Ex eb I Mb
IECEX restricted breathing certificate	IECEX CML 18.0182X
IECEX restricted breathing	Ex nR IIC Gc
ATEX gas certificate	CML 18ATEX1325X
ATEX gas explosion protection	Ex II 2 G Ex db IIC Gb
ATEX dust certificate	CML 18ATEX1325X
ATEX dust explosion protection	Ex II 1 D Ex ta IIIC Da
ATEX firedamp certificate	CML 18ATEX1325X
ATEX firedamp protection	Ex I M2 Ex db I Mb
ATEX firedamp protection	Ex I M2 Ex eb I Mb
ATEX restricted breathing certificate	CML 18ATEX4317X
ATEX restricted breathing	Ex II 3 G Ex nR IIC Gc
EAC certificate	TS RU S-GB.AA87.B.00487
EAC gas explosion protection	Ex 1 Ex d e IIC Gb X Ex 2 Ex nR IIC Gc X
EAC dust explosion protection	Ex ta IIIC Da X

# Installation Equipment and Accessories

## Cable gland With compound



CMP-20-PXSS2K Art. No. 109441

### Explosion Protection

Notes	The product certification and certificates can be downloaded from the manufacturer's homepage ( <a href="http://www.cmp-products.com">www.cmp-products.com</a> )
-------	---

### Ambient Conditions

Ambient temperature	-60 °C ... +85 °C
---------------------	-------------------


### Mechanical Data

Version	20
Degree of protection (IP)	IP66
Degree of protection note	IP67 and IP68 mounting in accordance with the specifications of the manufacturer, CMP
Sealing material	SOLO LSF
Sealing ring material	Viton
Material	Nickel-plated brass
Silicone-free	Yes
Clamping range	6.5 – 14 mm
Armouring type	Unarmoured cable types
Clamping range	6.5 ... 14 mm
Max. number of cores	11
Construction type	BS 6121, IEC/EN 62444
Width across corners	33 mm
Width across flats	30 mm
Thread size	M20
Thread length	15 mm
Thread pitch	1,5
Thread standard	Metric
Gland size	20
Inner sheath	12.6 mm
Max. internal conduit diameter	12.9 mm
Outer sheath	6.5 ... 14 mm
Protrusion length	54.2 mm
Impact strength 2	20 J
PVC boot	PVC06
Lot size	1
Weight	0.2 kg
Weight	0.44 lb

CMP-20-PXSS2K Art. No. 109441

---

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

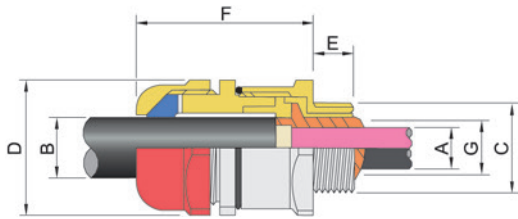

A = Max. inner sheath  
G = Max. internal conduit diameter  
B = Outer sheath  
C = Thread size  
D = Width across corners  
D = Width across flats  
E = Thread length  
F = Protrusion length

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.