


## hanging connector - with Multi-Grip, with suspension clip

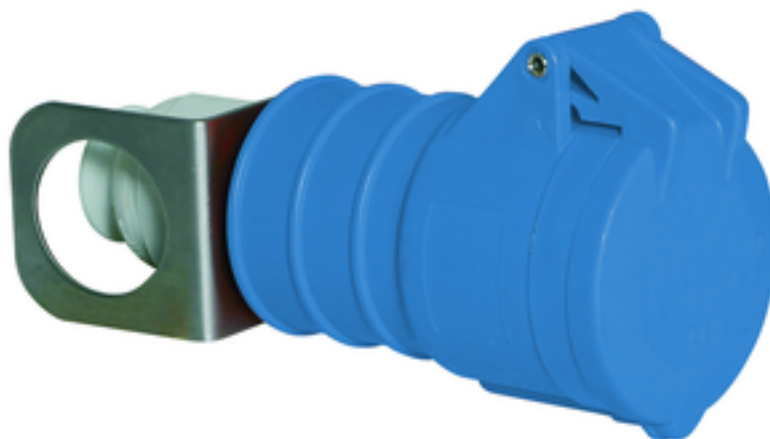


| Product description       |                                    |
|---------------------------|------------------------------------|
| BALS-Prd.-Nr              | 3216                               |
| EAN                       | 4024941032162                      |
| Product category          | Quick-Connect TE hanging connector |
| Current                   | 32A                                |
| Number of poles           | 3p                                 |
| Arrangement of phases     | 2P+PE                              |
| Position of earth contact | 6 h                                |
| Voltage                   | 200 - 250V~                        |
| Frequency                 | 50/60Hz                            |

| Product description    |                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------|
| Protection degree      | IP44                                                                                                     |
| Colour code            | blue RAL 5015                                                                                            |
| Colour of appliance    | Hinged lid blue RAL 5015, Cable gland grey RAL 7035, Enclosure blue RAL 5015                             |
| Connection design      | screwless spring terminals with Kontex-Kontakt                                                           |
| Maximum conductor size | 6,0 qmm                                                                                                  |
| Cable entry            | with cable gland                                                                                         |
| Height                 | 211mm                                                                                                    |
| Width                  | 66.5mm                                                                                                   |
| Depth                  | 91mm                                                                                                     |
| Material of enclosure  | Polyamide                                                                                                |
| Contacts               | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties |                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
|                                 | Multi-Grip cable gland with gasket, integrated cable clamp and additional water evacuation openings, For cable diameter from 11 up to max. 23,5 mm |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.348 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941032162    |

| Logistics data |               |
|----------------|---------------|
| Length         | 91 mm         |
| Width          | 66.5 mm       |
| Height         | 211 mm        |
| Weight         | 0.349 kg      |
| Volume         | 1,276.867 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941835442 |
| Length         | 325 mm        |
| Width          | 217 mm        |
| Height         | 210 mm        |
| Weight         | 3.686 kg      |
| Volume         | 13,588.4 ccm  |

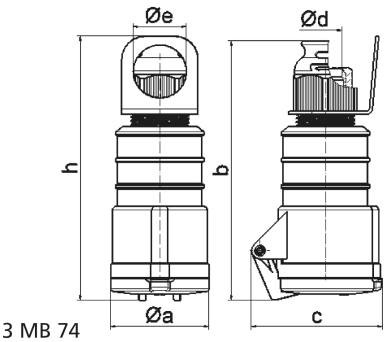

| Ampere         | 16    | 16    | 16    | 32    | 32    | 32    |
|----------------|-------|-------|-------|-------|-------|-------|
| Polzahl        | 3     | 4     | 5     | 3     | 4     | 5     |
| a ø            | 51,0  | 58,0  | 65,0  | 66,5  | 66,5  | 72,0  |
| b              | 156,0 | 162,0 | 168,0 | 195,0 | 195,0 | 198,0 |
| c              | 72,0  | 78,0  | 86,0  | 89,0  | 89,0  | 99,0  |
| d ø            | 18,0  | 18,0  | 21,0  | 23,0  | 23,0  | 27,0  |
| e ø            | 39,5  | 39,5  | 35,5  | 48,5  | 48,5  | 44,5  |
| h              | 167,5 | 173,5 | 171,5 | 208,0 | 208,0 | 205,0 |
| Leiter mm² min | 1     | 1     | 1     | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 2,5   | 2,5   | 2,5   | 6     | 6     | 6     |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |