

Panel mounting appliance inlet, angled - flange 85x85,  
fixing centers 70x70




| Product description       |                                                         |
|---------------------------|---------------------------------------------------------|
| BALS-Prd.-Nr              | 2793                                                    |
| EAN                       | 4024941027939                                           |
| Product category          | TE panel mounting appliance inlet Quick-Connect, angled |
| Current                   | 16A                                                     |
| Number of poles           | 5p                                                      |
| Arrangement of phases     | 3p+N+PE                                                 |
| Position of earth contact | 6 h                                                     |
| Voltage                   | 200/346 - 240/415V~                                     |

| Product description            |                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                                                                  |
| Protection degree              | IP67                                                                                                     |
| Colour code                    | red RAL 3000                                                                                             |
| Colour of appliance            | Bayonet ring grey RAL 7035, Enclosure grey RAL 7035, Collar red RAL 3000                                 |
| Connection design              | screwless spring-clamp technology                                                                        |
| Maximum conductor size         | 2,5 qmm                                                                                                  |
| Cable entry                    | other                                                                                                    |
| Height                         | 99mm                                                                                                     |
| Width                          | 86.5mm                                                                                                   |
| Depth                          | 115mm                                                                                                    |
| Flange size vertical in mm     | 85mm                                                                                                     |
| Flange size horizontal in mm   | 85mm                                                                                                     |
| Drill hole dist. vertical mm   | 70mm                                                                                                     |
| Drill hole dist. horizontal mm | 70mm                                                                                                     |
| Material of enclosure          | Polyamide                                                                                                |
| Contacts                       | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties |                        |
|---------------------------------|------------------------|
|                                 | The inclination is 10° |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.227 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941027939    |
| Length         | 115 mm           |
| Width          | 86.5 mm          |
| Height         | 99 mm            |
| Weight         | 0.228 kg         |
| Volume         | 984.803 ccm      |
| Packaging      | Carton           |
| Content amount | 10 ST            |
| EAN            | 4024941833912    |
| Length         | 295 mm           |
| Width          | 185 mm           |
| Height         | 215 mm           |
| Weight         | 2.434 kg         |
| Volume         | 9,975 ccm        |

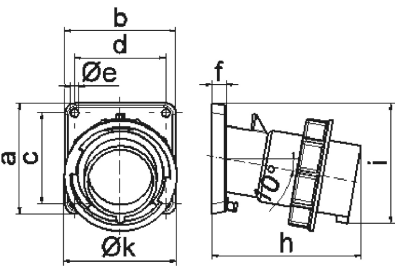

5 MB 22

| Ampere         | 16    | 16    | 16    | 32    | 32    | 32    |
|----------------|-------|-------|-------|-------|-------|-------|
| Polzahl        | 3     | 4     | 5     | 3     | 4     | 5     |
| a              | 85,0  | 85,0  | 85,0  | 85,0  | 85,0  | 85,0  |
| b              | 85,0  | 85,0  | 85,0  | 85,0  | 85,0  | 85,0  |
| c              | 70,0  | 70,0  | 70,0  | 70,0  | 70,0  | 70,0  |
| d              | 70,0  | 70,0  | 70,0  | 70,0  | 70,0  | 70,0  |
| e ø            | 6,3   | 6,3   | 6,3   | 6,3   | 6,3   | 6,3   |
| f              | 11,0  | 11,0  | 11,0  | 11,0  | 11,0  | 11,0  |
| h              | 104,0 | 110,0 | 116,0 | 121,0 | 121,0 | 127,0 |
| i              | 83,0  | 90,0  | 92,0  | 96,0  | 96,0  | 100,0 |
| k              | 70,5  | 79,5  | 86,5  | 95,0  | 95,0  | 101,5 |
| Leiter mm² min | 1     | 1     | 1     | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 2,5   | 2,5   | 2,5   | 6     | 6     | 6     |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |