







| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.06 06 03 | AExe 05010 | 64 x 58 x 34 |
| 15.06 06 03 | AExi 15010 | 64 x 58 x 34 |
| 25.06 06 03 | AExB 25010 | 64 x 58 x 34 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



|  | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|---|-----|-----|----|---|----|----|----|----|----|----|----|
|  | 3 | 3 | | | | | | | | | |
|  | | | | | | | | | | | |
|  | 6 | | | | | | | | | | |
| | 10 | 18 | | | | | | | | | |
| | 16 | 6 | 12 | | | | | | | | |
| | 20 | 2 | 7 | | | | | | | | |
| | 25 | | 3 | | | | | | | | |
| | 35 | | | | | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |





| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 2 | 1 |
| 16 | | |
| 20 | | |
| 25 | | |
| 32 | | |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.06 10 03 | AExe 05015 | 64 x 98 x 34 |
| 15.06 10 03 | AExi 15015 | 64 x 98 x 34 |
| 25.06 10 03 | AExB 25015 | 64 x 98 x 34 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



|  | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|---|-----|-----|----|---|----|----|----|----|----|----|----|
|  | 6 | 6 | | | | | | | | | |
|  | 1 | 1 | | | | | | | | | |
|  | 6 | | | | | | | | | | |
| | 10 | 20 | | | | | | | | | |
| | 16 | 7 | 13 | | | | | | | | |
| | 20 | 2 | 7 | | | | | | | | |
| | 25 | | 3 | | | | | | | | |
| | 35 | | | | | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 4 | 1 |
| 16 | | |
| 20 | | |
| 25 | | |
| 32 | | |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|-----------------|-------|
| Tragschiene | TS 15 |
| Länge (mm) | 87,5 |
| Außenerde (mm²) | 2,5 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.06 15 03 | AExe 05020 | 64 x 150 x 34 |
| 15.06 15 03 | AExi 15020 | 64 x 150 x 34 |
| 25.06 15 03 | AExB 25020 | 64 x 150 x 34 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----------|-----|-----|----|---|----|----|----|----|----|----|----|
| | 10 | 10 | | | | | | | | | |
| | 1 | 1 | | | | | | | | | |
| x | 6 | | | | | | | | | | |
| | 10 | 20 | | | | | | | | | |
| | 16 | 7 | 13 | | | | | | | | |
| | 20 | 3 | 8 | | | | | | | | |
| | 25 | | 3 | | | | | | | | |
| | 35 | | | | | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 8 | 1 |
| 16 | | |
| 20 | | |
| 25 | | |
| 32 | | |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 15 |
| Länge (mm) | 139 |
| Außenerde (mm ²) | 2,5 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.08 08 06 | AExe 05025 | 80 x 75 x 57 |
| 15.08 08 06 | AExi 15025 | 80 x 75 x 57 |
| 25.08 08 06 | AExB 25025 | 80 x 75 x 57 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----------|-----|-----|----|----|----|----|----|----|----|----|----|
| | 6 | 6 | 5 | | | | | | | | |
| | 1 | 1 | 1 | | | | | | | | |
| x | 6 | | | | | | | | | | |
| | 10 | 27 | | | | | | | | | |
| | 16 | 9 | 18 | 70 | | | | | | | |
| | 20 | 3 | 10 | 20 | | | | | | | |
| | 25 | | 5 | 11 | | | | | | | |
| | 35 | | | 3 | | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 3 | 5 |
| 16 | 1 | 2 |
| 20 | 1 | 2 |
| 25 | 1 | 1 |
| 32 | | |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 15 |
| Länge (mm) | 63 |
| max. Bestückungslänge (mm) | 46 |
| Außenerde (mm ²) | 4 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.08 13 06 | AExe 05030 | 80 x 125 x 57 |
| 15.08 13 06 | AExi 15030 | 80 x 125 x 57 |
| 25.08 13 06 | AExB 25030 | 80 x 125 x 57 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----|-----|-----|----|----|----|----|----|----|----|----|----|
| | 12 | 12 | 9 | | | | | | | | |
| | 1 | 1 | 1 | | | | | | | | |
| | 6 | | | | | | | | | | |
| | 10 | 29 | | | | | | | | | |
| | 16 | 10 | 19 | 76 | | | | | | | |
| | 20 | 4 | 11 | 22 | | | | | | | |
| | 25 | | 5 | 12 | | | | | | | |
| | 35 | | | 3 | | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 9 | 5 |
| 16 | 4 | 2 |
| 20 | 3 | 2 |
| 25 | 2 | 1 |
| 32 | | |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 15 |
| Länge (mm) | 113 |
| max. Bestückungslänge (mm) | 85,5 |
| Außenerde (mm ²) | 4 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.08 18 06 | AExe 05035 | 80 x 175 x 57 |
| 15.08 18 06 | AExi 15035 | 80 x 175 x 57 |
| 25.08 18 06 | AExB 25035 | 80 x 175 x 57 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----|-----|-----|----|----|----|----|----|----|----|----|----|
| | 25 | 25 | 21 | | | | | | | | |
| | 1 | 1 | 1 | | | | | | | | |
| | 6 | | | | | | | | | | |
| | 10 | 29 | | | | | | | | | |
| | 16 | 10 | 19 | 77 | | | | | | | |
| | 20 | 4 | 11 | 22 | | | | | | | |
| | 25 | | 5 | 12 | | | | | | | |
| | 35 | | | 3 | | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 14 | 5 |
| 16 | 6 | 2 |
| 20 | 5 | 2 |
| 25 | 3 | 1 |
| 32 | | |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 15 |
| Länge (mm) | 163 |
| max. Bestückungslänge (mm) | 135,5 |
| Außenerde (mm ²) | 4 |









| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.08 25 05 | AExe 05040 | 80 x 250 x 52 |
| 15.08 25 05 | AExi 15040 | 80 x 250 x 52 |
| 25.08 25 05 | AExB 25040 | 80 x 250 x 52 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



|  | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|---|-----|-----|----|----|----|----|----|----|----|----|----|
|  | 40 | 40 | 33 | | | | | | | | |
|  | 1 | 1 | 1 | | | | | | | | |
|  | 6 | | | | | | | | | | |
| | 10 | 28 | | | | | | | | | |
| | 16 | 9 | 19 | 73 | | | | | | | |
| | 20 | 4 | 11 | 21 | | | | | | | |
| | 25 | | 5 | 12 | | | | | | | |
| | 35 | | | 3 | | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 23 | 6 |
| 16 | 9 | 2 |
| 20 | 8 | 2 |
| 25 | 5 | 1 |
| 32 | | |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |





| | |
|------------------------------|-------|
| Tragschiene | TS 15 |
| Länge (mm) | 238 |
| max. Bestückungslänge (mm) | 209,5 |
| Außenerde (mm ²) | 4 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.10 10 08 | AExe 05045 | 100 x 100 x 81 |
| 15.10 10 08 | AExi 15045 | 100 x 100 x 81 |
| 25.10 10 08 | AExB 25045 | 100 x 100 x 81 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



|  | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|---|-----|-----|----|----|----|----|----|----|----|----|----|
|  | 14 | 11 | 9 | 7 | | | | | | | |
|  | 1 | 1 | 1 | 1 | | | | | | | |
|  | 6 | | | | | | | | | | |
| | 10 | 37 | | | | | | | | | |
| | 16 | 12 | 24 | 95 | | | | | | | |
| | 20 | 5 | 14 | 27 | | | | | | | |
| | 25 | | 6 | 15 | 30 | | | | | | |
| | 35 | | | 4 | 11 | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 12 | 9 |
| 16 | 6 | 4 |
| 20 | 5 | 3 |
| 25 | 2 | 1 |
| 32 | 1 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|----------|
| Tragschiene | TS 15/35 |
| Länge (mm) | 87,5 |
| max. Bestückungslänge (mm) | 59,5 |
| Außenerde (mm ²) | 6 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.10 16 08 | AExe 05050 | 100 x 160 x 81 |
| 15.10 16 08 | AExi 15050 | 100 x 160 x 81 |
| 25.10 16 08 | AExB 25050 | 100 x 160 x 81 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|------------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 28 | 23 | 19 | 14 | | | | | | | |
| | 1 | 1 | 1 | 1 | | | | | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 39 | | | | | | | | | |
| | 16 | 13 | 26 | 101 | | | | | | | |
| | 20 | 5 | 15 | 29 | | | | | | | |
| | 25 | | 7 | 16 | 32 | | | | | | |
| | 35 | | | 4 | 12 | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 24 | 9 |
| 16 | 11 | 4 |
| 20 | 10 | 3 |
| 25 | 4 | 1 |
| 32 | 3 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|----------|
| Tragschiene | TS 15/35 |
| Länge (mm) | 148 |
| max. Bestückungslänge (mm) | 120 |
| Außenerde (mm ²) | 6 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.10 20 08 | AExe 05055 | 100 x 200 x 81 |
| 15.10 20 08 | AExi 15055 | 100 x 200 x 81 |
| 25.10 20 08 | AExB 25055 | 100 x 200 x 81 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|------------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 38 | 30 | 25 | 19 | | | | | | | |
| | 1 | 1 | 1 | 1 | | | | | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 39 | | | | | | | | | |
| | 16 | 13 | 26 | 102 | | | | | | | |
| | 20 | 5 | 15 | 29 | | | | | | | |
| | 25 | | 7 | 16 | 32 | | | | | | |
| | 35 | | | 5 | 12 | | | | | | |
| | 50 | | | | | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 32 | 9 |
| 16 | 14 | 4 |
| 20 | 12 | 3 |
| 25 | 5 | 1 |
| 32 | 3 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|----------|
| Tragschiene | TS 15/35 |
| Länge (mm) | 188 |
| max. Bestückungslänge (mm) | 160 |
| Außenerde (mm ²) | 6 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.12 12 08 | AExe 05060 | 120 x 122 x 81 |
| 15.12 12 08 | AExi 15060 | 120 x 122 x 81 |
| 25.12 12 08 | AExB 25060 | 120 x 122 x 81 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-------|-----|-----|-----|-----|----|----|----|----|----|----|----|----|
| | | 19 | 15 | 13 | 10 | 8 | 6 | | | | | |
| | | 1 | 1 | 1 | 1 | 1 | 1 | | | | | |
| x | 6 | | | | | | | | | | | |
| | 10 | 40 | | | | | | | | | | |
| | 16 | 13 | 26 | 103 | | | | | | | | |
| | 20 | 5 | 15 | 30 | | | | | | | | |
| | 25 | | 7 | 17 | 32 | | | | | | | |
| | 35 | | | | 5 | 12 | 31 | | | | | |
| | 50 | | | | | | 10 | 26 | | | | |
| | 63 | | | | | | 3 | 12 | | | | |
| | 80 | | | | | | | 4 | | | | |
| | 100 | | | | | | | | | | | |
| | 125 | | | | | | | | | | | |
| | 160 | | | | | | | | | | | |
| | 200 | | | | | | | | | | | |
| | 225 | | | | | | | | | | | |
| | 250 | | | | | | | | | | | |
| | 315 | | | | | | | | | | | |
| | 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 10 | 11 |
| 16 | 5 | 5 |
| 20 | 4 | 4 |
| 25 | 2 | 2 |
| 32 | 1 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 107 |
| max. Bestückungslänge (mm) | 65 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.12 12 09 | AExe 05065 | 120 x 122 x 91 |
| 15.12 12 09 | AExi 15065 | 120 x 122 x 91 |
| 25.12 12 09 | AExB 25065 | 120 x 122 x 91 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-------|-----|-----|-----|-----|----|----|----|----|----|----|----|----|
| | | 19 | 15 | 13 | 10 | 8 | 6 | | | | | |
| | | 1 | 1 | 1 | 1 | 1 | 1 | | | | | |
| x | 6 | | | | | | | | | | | |
| | 10 | 43 | | | | | | | | | | |
| | 16 | 14 | 28 | 110 | | | | | | | | |
| | 20 | 6 | 16 | 32 | | | | | | | | |
| | 25 | | 7 | 18 | 35 | | | | | | | |
| | 35 | | | | 5 | 13 | 34 | | | | | |
| | 50 | | | | | 2 | 11 | 28 | | | | |
| | 63 | | | | | | 3 | 13 | | | | |
| | 80 | | | | | | | 5 | | | | |
| | 100 | | | | | | | | | | | |
| | 125 | | | | | | | | | | | |
| | 160 | | | | | | | | | | | |
| | 200 | | | | | | | | | | | |
| | 225 | | | | | | | | | | | |
| | 250 | | | | | | | | | | | |
| | 315 | | | | | | | | | | | |
| | 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 10 | 11 |
| 16 | 5 | 5 |
| 20 | 4 | 4 |
| 25 | 2 | 2 |
| 32 | 1 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 107 |
| max. Bestückungslänge (mm) | 65 |
| Außenerde (mm ²) | 16 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.12 22 08 | AExe 05070 | 120 x 220 x 81 |
| 15.12 22 08 | AExi 15070 | 120 x 220 x 81 |
| 25.12 22 08 | AExB 25070 | 120 x 220 x 81 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 42 | 34 | 29 | 21 | 17 | 14 | | | | | |
| | 1 | 1 | 1 | 1 | 1 | 1 | | | | | |
| | 6 | | | | | | | | | | |
| | 10 | 42 | | | | | | | | | |
| | 16 | 14 | 28 | 111 | | | | | | | |
| | 20 | 6 | 16 | 32 | | | | | | | |
| | 25 | | 8 | 18 | 35 | | | | | | |
| | 35 | | | 5 | 13 | 34 | | | | | |
| | 50 | | | | 2 | 11 | 28 | | | | |
| | 63 | | | | | 3 | 13 | | | | |
| | 80 | | | | | | 5 | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 30 | 11 |
| 16 | 12 | 6 |
| 20 | 12 | 4 |
| 25 | 5 | 2 |
| 32 | 3 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 205 |
| max. Bestückungslänge (mm) | 164,5 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.12 22 09 | AExe 05075 | 120 x 220 x 91 |
| 15.12 22 09 | AExi 15075 | 120 x 220 x 91 |
| 25.12 22 09 | AExB 25075 | 120 x 220 x 91 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 42 | 34 | 29 | 21 | 17 | 14 | | | | | |
| | 1 | 1 | 1 | 1 | 1 | 1 | | | | | |
| | 6 | | | | | | | | | | |
| | 10 | 45 | | | | | | | | | |
| | 16 | 15 | 30 | 118 | | | | | | | |
| | 20 | 6 | 17 | 34 | | | | | | | |
| | 25 | | 8 | 19 | 37 | | | | | | |
| | 35 | | | 5 | 14 | 36 | | | | | |
| | 50 | | | | 2 | 11 | 30 | | | | |
| | 63 | | | | | 4 | 14 | | | | |
| | 80 | | | | | | 5 | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 34 | 11 |
| 16 | 15 | 6 |
| 20 | 14 | 4 |
| 25 | 6 | 2 |
| 32 | 4 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 205 |
| max. Bestückungslänge (mm) | 164,5 |
| Außenerde (mm ²) | 16 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.12 36 08 | AExe 05080 | 120 x 360 x 81 |
| 15.12 36 08 | AExi 15080 | 120 x 360 x 81 |
| 25.12 36 08 | AExB 25080 | 120 x 360 x 81 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 76 | 61 | 51 | 39 | 31 | 26 | | | | | |
| N | 1 | 1 | 1 | 1 | 1 | 1 | | | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 43 | | | | | | | | | |
| | 16 | 14 | 28 | 112 | | | | | | | |
| | 20 | 6 | 16 | 32 | | | | | | | |
| | 25 | | 8 | 18 | 35 | | | | | | |
| | 35 | | | 5 | 13 | 34 | | | | | |
| | 50 | | | | 2 | 11 | 28 | | | | |
| | 63 | | | | | 3 | 13 | | | | |
| | 80 | | | | | | 5 | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 58 | 11 |
| 16 | 26 | 5 |
| 20 | 24 | 4 |
| 25 | 10 | 2 |
| 32 | 7 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 343 |
| max. Bestückungslänge (mm) | 305 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.14 14 09 | AExe 05085 | 140 x 140 x 91 |
| 15.14 14 09 | AExi 15085 | 140 x 140 x 91 |
| 25.14 14 09 | AExB 25085 | 140 x 140 x 91 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 23 | 19 | 16 | 12 | 9 | 8 | 6 | | | | |
| N | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 45 | | | | | | | | | |
| | 16 | 15 | 30 | 117 | | | | | | | |
| | 20 | 6 | 17 | 34 | | | | | | | |
| | 25 | | 8 | 19 | 37 | | | | | | |
| | 35 | | | 5 | 14 | 36 | | | | | |
| | 50 | | | | 2 | 11 | 30 | | | | |
| | 63 | | | | | 4 | 14 | 49 | | | |
| | 80 | | | | | | 5 | 15 | | | |
| | 100 | | | | | | | 6 | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 18 | 12 |
| 16 | 8 | 6 |
| 20 | 8 | 4 |
| 25 | 3 | 2 |
| 32 | 2 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 126 |
| max. Bestückungslänge (mm) | 86 |
| Außenerde (mm ²) | 25 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.14 20 09 | AExe 05090 | 140 x 200 x 91 |
| 15.14 20 09 | AExi 15090 | 140 x 200 x 91 |
| 25.14 20 09 | AExB 25090 | 140 x 200 x 91 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 38 | 30 | 25 | 19 | 15 | 13 | 10 | | | | |
| | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | |
| | 6 | | | | | | | | | | |
| | 10 | 48 | | | | | | | | | |
| | 16 | 16 | 32 | 125 | | | | | | | |
| | 20 | 6 | 18 | 36 | | | | | | | |
| | 25 | | 9 | 20 | 39 | | | | | | |
| | 35 | | | 6 | 15 | 38 | | | | | |
| | 50 | | | | 2 | 12 | 31 | | | | |
| | 63 | | | | | 4 | 14 | 52 | | | |
| | 80 | | | | | | 5 | 16 | | | |
| | 100 | | | | | | | 7 | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 28 | 12 |
| 16 | 12 | 6 |
| 20 | 12 | 4 |
| 25 | 5 | 2 |
| 32 | 3 | 1 |
| 40 | | |
| 50 | | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 186 |
| max. Bestückungslänge (mm) | 140 |
| Außenerde (mm ²) | 25 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.16 16 09 | AExe 05095 | 160 x 160 x 91 |
| 15.16 16 09 | AExi 15095 | 160 x 160 x 91 |
| 25.16 16 09 | AExB 25095 | 160 x 160 x 91 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 28 | 23 | 19 | 14 | 11 | 9 | 7 | 7 | | | |
| | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | |
| | 6 | | | | | | | | | | |
| | 10 | 48 | | | | | | | | | |
| | 16 | 16 | 32 | 125 | | | | | | | |
| | 20 | 6 | 18 | 36 | | | | | | | |
| | 25 | | 9 | 20 | 39 | | | | | | |
| | 35 | | | 6 | 15 | 38 | | | | | |
| | 50 | | | | 2 | 12 | 31 | | | | |
| | 63 | | | | | 4 | 14 | 52 | | | |
| | 80 | | | | | | 5 | 16 | 58 | | |
| | 100 | | | | | | | 7 | 15 | | |
| | 125 | | | | | | | | 6 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 26 | 16 |
| 16 | 12 | 8 |
| 20 | 9 | 6 |
| 25 | 5 | 3 |
| 32 | 3 | 2 |
| 40 | 2 | 1 |
| 50 | 2 | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 144 |
| max. Bestückungslänge (mm) | 105 |
| Außenerde (mm ²) | 16 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.16 26 09 | AExe 05100 | 160 x 260 x 91 |
| 15.16 26 09 | AExi 15100 | 160 x 260 x 91 |
| 25.16 26 09 | AExB 25100 | 160 x 260 x 91 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|----------------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 52 | 42 | 35 | 26 | 21 | 18 | 14 | 14 | | | |
| U N | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 52 | | | | | | | | | |
| | 16 | 18 | 34 | 135 | | | | | | | |
| | 20 | 7 | 20 | 39 | | | | | | | |
| | 25 | | 9 | 22 | 42 | | | | | | |
| | 35 | | | 6 | 16 | 41 | | | | | |
| | 50 | | | | 2 | 13 | 34 | | | | |
| | 63 | | | | | 4 | 16 | 56 | | | |
| | 80 | | | | | | 6 | 17 | 63 | | |
| | 100 | | | | | | | 7 | 16 | | |
| | 125 | | | | | | | | 6 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 50 | 16 |
| 16 | 24 | 8 |
| 20 | 17 | 6 |
| 25 | 10 | 3 |
| 32 | 5 | 2 |
| 40 | 3 | 1 |
| 50 | 3 | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 245 |
| max. Bestückungslänge (mm) | 205 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.16 36 09 | AExe 05105 | 160 x 360 x 91 |
| 15.16 36 09 | AExi 15105 | 160 x 360 x 91 |
| 25.16 36 09 | AExB 25105 | 160 x 360 x 91 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|----------------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 76 | 61 | 51 | 39 | 31 | 26 | 21 | 21 | | | |
| U N | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 53 | | | | | | | | | |
| | 16 | 18 | 35 | 138 | | | | | | | |
| | 20 | 7 | 20 | 40 | | | | | | | |
| | 25 | | 9 | 22 | 43 | | | | | | |
| | 35 | | | 6 | 17 | 42 | | | | | |
| | 50 | | | | 2 | 13 | 35 | | | | |
| | 63 | | | | | 4 | 16 | 58 | | | |
| | 80 | | | | | | 6 | 18 | 64 | | |
| | 100 | | | | | | | 7 | 17 | | |
| | 125 | | | | | | | | 6 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 72 | 16 |
| 16 | 36 | 8 |
| 20 | 24 | 6 |
| 25 | 15 | 3 |
| 32 | 7 | 2 |
| 40 | 5 | 1 |
| 50 | 4 | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 343 |
| max. Bestückungslänge (mm) | 305 |
| Außenerde (mm ²) | 16 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.16 56 09 | AExe 05110 | 160 x 560 x 91 |
| 15.16 56 09 | AExi 15110 | 160 x 560 x 91 |
| 25.16 56 09 | AExB 25110 | 160 x 560 x 91 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 123 | 100 | 83 | 63 | 50 | 42 | 34 | 34 | | | |
| | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | |
| | 6 | | | | | | | | | | |
| | 10 | 53 | | | | | | | | | |
| | 16 | 18 | 35 | 138 | | | | | | | |
| | 20 | 7 | 20 | 40 | | | | | | | |
| | 25 | | 9 | 22 | 43 | | | | | | |
| | 35 | | | 6 | 17 | 42 | | | | | |
| | 50 | | | | 2 | 13 | 35 | | | | |
| | 63 | | | | | 4 | 16 | 58 | | | |
| | 80 | | | | | | 6 | 18 | 64 | | |
| | 100 | | | | | | | 7 | 17 | | |
| | 125 | | | | | | | | 6 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 104 | 16 |
| 16 | 58 | 8 |
| 20 | 40 | 6 |
| 25 | 24 | 3 |
| 32 | 12 | 2 |
| 40 | 8 | 1 |
| 50 | 6 | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 543 |
| max. Bestückungslänge (mm) | 505 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.18 18 10 | AExe 05115 | 180 x 180 x 101 |
| 15.18 18 10 | AExi 15115 | 180 x 180 x 101 |
| 25.18 18 10 | AExB 25115 | 180 x 180 x 101 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-----|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 33 | 26 | 22 | 17 | 13 | 11 | 9 | 9 | | | |
| | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | |
| | 6 | | | | | | | | | | |
| | 10 | 54 | | | | | | | | | |
| | 16 | 18 | 36 | 139 | | | | | | | |
| | 20 | 7 | 21 | 40 | | | | | | | |
| | 25 | | 10 | 23 | 44 | | | | | | |
| | 35 | | | 6 | 17 | 43 | | | | | |
| | 50 | | | | 2 | 14 | 35 | | | | |
| | 63 | | | | | 4 | 16 | 58 | | | |
| | 80 | | | | | | 6 | 18 | 65 | | |
| | 100 | | | | | | | 7 | 17 | | |
| | 125 | | | | | | | | 7 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 30 | 20 |
| 16 | 15 | 9 |
| 20 | 11 | 8 |
| 25 | 6 | 3 |
| 32 | 3 | 2 |
| 40 | 2 | 2 |
| 50 | 2 | |
| 63 | | |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 166 |
| max. Bestückungslänge (mm) | 126 |
| Außenerde (mm ²) | 16 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.18 28 10 | AExe 05120 | 180 x 280 x 101 |
| 15.18 28 10 | AExi 15125 | 230 x 100 x 111 |
| 25.18 28 10 | AExB 25120 | 180 x 280 x 101 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 52 | 22 |
| 16 | 26 | 10 |
| 20 | 18 | 8 |
| 25 | 11 | 4 |
| 32 | 5 | 2 |
| 40 | 4 | 2 |
| 50 | 3 | |
| 63 | | |
| 75 | | |
| 85 | | |

| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 57 | 46 | 38 | 29 | 23 | 19 | 15 | 15 | | | |
| | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | |
| x | 6 | | | | | | | | | | |
| | 10 | 58 | | | | | | | | | |
| | 16 | 20 | 38 | 150 | | | | | | | |
| | 20 | 8 | 22 | 43 | | | | | | | |
| | 25 | | 10 | 24 | 47 | | | | | | |
| | 35 | | | 7 | 18 | 46 | | | | | |
| | 50 | | | | 2 | 15 | 38 | | | | |
| | 63 | | | | | 5 | 17 | 63 | | | |
| | 80 | | | | | | 6 | 19 | 70 | | |
| | 100 | | | | | | | 8 | 18 | | |
| | 125 | | | | | | | | 7 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 264 |
| max. Bestückungslänge (mm) | 221,5 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.23 10 11 | AExe 05125 | 230 x 100 x 111 |
| 15.23 10 11 | AExi 15120 | 180 x 280 x 101 |
| 25.23 10 11 | AExB 25125 | 230 x 100 x 111 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 15 | 45 |
| 16 | 8 | 18 |
| 20 | 6 | 17 |
| 25 | 3 | 8 |
| 32 | 2 | 5 |
| 40 | 1 | 3 |
| 50 | 1 | 2 |
| 63 | | 2 |
| 75 | | |
| 85 | | |

| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 45 | 36 | 30 | 23 | | | | | | | |
| | 1 | 1 | 1 | 1 | | | | | | | |
| x | 6 | | | | | | | | | | |
| | 10 | 47 | | | | | | | | | |
| | 16 | 16 | 31 | 123 | | | | | | | |
| | 20 | 6 | 18 | 35 | | | | | | | |
| | 25 | | 8 | 20 | 39 | | | | | | |
| | 35 | | | 6 | 15 | | | | | | |
| | 50 | | | | 2 | | | | | | |
| | 63 | | | | | | | | | | |
| | 80 | | | | | | | | | | |
| | 100 | | | | | | | | | | |
| | 125 | | | | | | | | | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |


| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 214 |
| max. Bestückungslänge (mm) | 172 |
| Außenerde (mm ²) | 6 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.23 20 11 | AExe 05130 | 232 x 202 x 111 |
| 15.23 20 11 | AExi 15130 | 232 x 202 x 111 |
| 25.23 20 11 | AExB 25130 | 232 x 202 x 111 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 45 | 45 |
| 16 | 22 | 18 |
| 20 | 18 | 17 |
| 25 | 8 | 8 |
| 32 | 6 | 5 |
| 40 | 3 | 3 |
| 50 | 2 | 2 |
| 63 | 2 | 2 |
| 75 | | |
| 85 | | |

| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|----------------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 76 | 62 | 52 | 38 | 15 | 13 | 10 | 10 | | | |
| | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 62 | | | | | | | | | |
| | 16 | 21 | 41 | 160 | | | | | | | |
| | 20 | 8 | 24 | 46 | | | | | | | |
| | 25 | | 11 | 26 | 50 | | | | | | |
| | 35 | | | 7 | 19 | 49 | | | | | |
| | 50 | | | | 2 | 16 | 40 | | | | |
| | 63 | | | | | 5 | 19 | 67 | | | |
| | 80 | | | | | | 7 | 21 | 75 | | |
| | 100 | | | | | | | 9 | 19 | | |
| | 125 | | | | | | | | 8 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 186 |
| max. Bestückungslänge (mm) | 140 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.23 20 18 | AExe 05135 | 232 x 202 x 181 |
| 15.23 20 18 | AExi 15135 | 232 x 202 x 181 |
| 25.23 20 18 | AExB 25135 | 232 x 202 x 181 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 90 | 81 |
| 16 | 42 | 36 |
| 20 | 33 | 33 |
| 25 | 18 | 16 |
| 32 | 10 | 9 |
| 40 | 6 | 6 |
| 50 | 5 | 5 |
| 63 | 4 | 4 |
| 75 | | |
| 85 | | |

| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|----------------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 76 | 62 | 52 | 38 | 15 | 13 | 10 | 10 | 8 | | |
| | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 82 | | | | | | | | | |
| | 16 | 28 | 54 | 211 | | | | | | | |
| | 20 | 11 | 31 | 61 | | | | | | | |
| | 25 | | 15 | 34 | 67 | | | | | | |
| | 35 | | | 10 | 26 | 65 | | | | | |
| | 50 | | | | 3 | 21 | 54 | | | | |
| | 63 | | | | | 7 | 25 | 88 | | | |
| | 80 | | | | | | 9 | 27 | 99 | | |
| | 100 | | | | | | | 12 | 26 | | |
| | 125 | | | | | | | | 10 | 26 | |
| | 160 | | | | | | | | | 9 | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 186 |
| max. Bestückungslänge (mm) | 140 |
| Außenerde (mm ²) | 35 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.23 28 II | AExe 05140 | 230 x 280 x 111 |
| 15.23 28 II | AExi 15140 | 230 x 280 x 111 |
| 25.23 28 II | AExB 25140 | 230 x 280 x 111 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-------------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 114 | 92 | 76 | 58 | 46 | 19 | 15 | 15 | | | |
| II N | 2 | 2 | 2 | 2 | 2 | 1 | 1 | 1 | | | |
| x | 6 | | | | | | | | | | |
| | 10 | 67 | | | | | | | | | |
| | 16 | 23 | 44 | 173 | | | | | | | |
| | 20 | 9 | 26 | 50 | | | | | | | |
| | 25 | | 12 | 28 | 54 | | | | | | |
| | 35 | | | 8 | 21 | 53 | | | | | |
| | 50 | | | | 3 | 17 | 44 | | | | |
| | 63 | | | | | 5 | 20 | 72 | | | |
| | 80 | | | | | | 7 | 22 | 81 | | |
| | 100 | | | | | | | 9 | 21 | | |
| | 125 | | | | | | | | 8 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 70 | 45 |
| 16 | 32 | 18 |
| 20 | 24 | 17 |
| 25 | 12 | 8 |
| 32 | 9 | 5 |
| 40 | 4 | 3 |
| 50 | 3 | 2 |
| 63 | 3 | 2 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 264 |
| max. Bestückungslänge (mm) | 220 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.23 33 II | AExe 05145 | 230 x 330 x 111 |
| 15.23 33 II | AExi 15145 | 230 x 330 x 111 |
| 25.23 33 II | AExB 25145 | 230 x 330 x 111 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-------------|-----|-----|----|-----|----|----|----|----|----|----|----|
| | 138 | 110 | 92 | 70 | 56 | 23 | 19 | 19 | | | |
| II N | 2 | 2 | 2 | 2 | 2 | 1 | 1 | 1 | | | |
| x | 6 | | | | | | | | | | |
| | 10 | 69 | | | | | | | | | |
| | 16 | 23 | 45 | 178 | | | | | | | |
| | 20 | 9 | 26 | 51 | | | | | | | |
| | 25 | | 12 | 29 | 56 | | | | | | |
| | 35 | | | 8 | 22 | 54 | | | | | |
| | 50 | | | | 3 | 18 | 45 | | | | |
| | 63 | | | | | 6 | 21 | 74 | | | |
| | 80 | | | | | | 8 | 23 | 83 | | |
| | 100 | | | | | | | 10 | 22 | | |
| | 125 | | | | | | | | 9 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 84 | 45 |
| 16 | 42 | 18 |
| 20 | 30 | 17 |
| 25 | 15 | 8 |
| 32 | 11 | 5 |
| 40 | 5 | 3 |
| 50 | 4 | 2 |
| 63 | 4 | 2 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 314 |
| max. Bestückungslänge (mm) | 270 |
| Außenerde (mm ²) | 16 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.23 33 18 | AExe 05150 | 230 x 330 x 181 |
| 15.23 33 18 | AExi 15150 | 230 x 330 x 181 |
| 25.23 33 18 | AExB 25150 | 230 x 330 x 181 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-------|-----|-----|-----|----|-----|----|----|----|----|-----|----|----|
| | | 138 | 110 | 92 | 70 | 56 | 23 | 19 | 19 | 14 | | |
| | N | 2 | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | | |
| x | A | 6 | | | | | | | | | | |
| | | 10 | 88 | | | | | | | | | |
| | | 16 | 30 | 59 | 228 | | | | | | | |
| | | 20 | 12 | 34 | 66 | | | | | | | |
| | | 25 | | 16 | 37 | 72 | | | | | | |
| | | 35 | | | 11 | 28 | 70 | | | | | |
| | | 50 | | | | 4 | 23 | 58 | | | | |
| | | 63 | | | | | 7 | 27 | 96 | | | |
| | | 80 | | | | | | 10 | 30 | 107 | | |
| | | 100 | | | | | | | 13 | 28 | | |
| | | 125 | | | | | | | | 11 | 28 | |
| | | 160 | | | | | | | | | 10 | |
| | | 200 | | | | | | | | | | |
| | | 225 | | | | | | | | | | |
| | | 250 | | | | | | | | | | |
| | | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | | |
| | 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 165 | 81 |
| 16 | 77 | 36 |
| 20 | 60 | 33 |
| 25 | 30 | 16 |
| 32 | 18 | 9 |
| 40 | 11 | 6 |
| 50 | 8 | 5 |
| 63 | 8 | 4 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 314 |
| max. Bestückungslänge (mm) | 270 |
| Außenerde (mm ²) | 35 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.23 40 11 | AExe 05155 | 230 x 400 x 111 |
| 15.23 40 11 | AExi 15155 | 230 x 400 x 111 |
| 25.23 40 11 | AExB 25155 | 230 x 400 x 111 |


Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|-------|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|
| | | 170 | 138 | 116 | 86 | 70 | 29 | 23 | 23 | | | |
| | N | 2 | 2 | 2 | 2 | 2 | 1 | 1 | 1 | | | |
| x | A | 6 | | | | | | | | | | |
| | | 10 | 70 | | | | | | | | | |
| | | 16 | 24 | 47 | 182 | | | | | | | |
| | | 20 | 10 | 27 | 52 | | | | | | | |
| | | 25 | | 13 | 30 | 57 | | | | | | |
| | | 35 | | | 8 | 22 | 56 | | | | | |
| | | 50 | | | | 3 | 18 | 46 | | | | |
| | | 63 | | | | | 6 | 21 | 76 | | | |
| | | 80 | | | | | | 8 | 24 | 85 | | |
| | | 100 | | | | | | | 10 | 22 | | |
| | | 125 | | | | | | | | 9 | | |
| | | 160 | | | | | | | | | | |
| | | 200 | | | | | | | | | | |
| | | 225 | | | | | | | | | | |
| | | 250 | | | | | | | | | | |
| | | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | | |
| | 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 103 | 45 |
| 16 | 50 | 18 |
| 20 | 39 | 17 |
| 25 | 20 | 8 |
| 32 | 14 | 5 |
| 40 | 6 | 3 |
| 50 | 5 | 2 |
| 63 | 5 | 2 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 381 |
| max. Bestückungslänge (mm) | 340 |
| Außenerde (mm ²) | 16 |

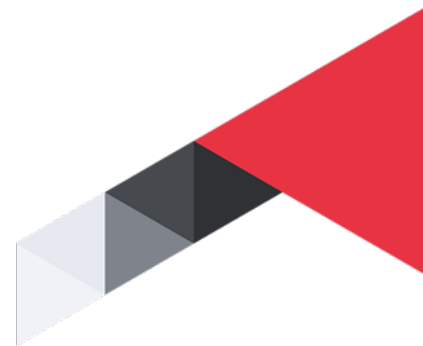



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.23 40 23 | AExe 05160 | 230 x 400 x 225 |
| 15.23 40 23 | AExi 15160 | 230 x 400 x 225 |
| 25.23 40 23 | AExB 25160 | 230 x 400 x 225 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 240 | 108 |
| 16 | 122 | 48 |
| 20 | 100 | 44 |
| 25 | 54 | 21 |
| 32 | 30 | 13 |
| 40 | 18 | 9 |
| 50 | 15 | 6 |
| 63 | 12 | 5 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 381 |
| max. Bestückungslänge (mm) | 340 |
| Außenerde (mm ²) | 35 |

| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|------------|-----|-----|-----|-----|----|----|----|-----|-----|----|----|
| | | | | | | | | | | | |
| | 170 | 138 | 116 | 86 | 70 | 29 | 23 | 23 | 18 | | |
| | 2 | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 102 | | | | | | | | | |
| | 16 | 35 | 67 | 263 | | | | | | | |
| | 20 | 14 | 39 | 76 | | | | | | | |
| | 25 | | 18 | 43 | 83 | | | | | | |
| | 35 | | | 12 | 32 | 81 | | | | | |
| | 50 | | | | 4 | 26 | 67 | | | | |
| | 63 | | | | | 9 | 31 | 110 | | | |
| | 80 | | | | | | 12 | 34 | 123 | | |
| | 100 | | | | | | | 15 | 32 | | |
| | 125 | | | | | | | | 13 | 33 | |
| | 160 | | | | | | | | | 11 | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 150 | 43 |
| 16 | 72 | 18 |
| 20 | 54 | 17 |
| 25 | 28 | 8 |
| 32 | 20 | 4 |
| 40 | 10 | 3 |
| 50 | 8 | 2 |
| 63 | 6 | 2 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 581 |
| max. Bestückungslänge (mm) | 540 |
| Außenerde (mm ²) | 16 |

| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|------------|-----|-----|-----|-----|----|----|----|----|----|----|----|
| | | | | | | | | | | | |
| | 266 | 214 | 180 | 136 | 54 | 45 | 36 | 36 | | | |
| | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 72 | | | | | | | | | |
| | 16 | 24 | 47 | 185 | | | | | | | |
| | 20 | 10 | 28 | 54 | | | | | | | |
| | 25 | | 13 | 30 | 58 | | | | | | |
| | 35 | | | 9 | 23 | 57 | | | | | |
| | 50 | | | | 3 | 18 | 47 | | | | |
| | 63 | | | | | 6 | 22 | 78 | | | |
| | 80 | | | | | | 8 | 24 | 87 | | |
| | 100 | | | | | | | 10 | 23 | | |
| | 125 | | | | | | | | 9 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.31 40 11 | AExe 05170 | 313 x 404 x 111 |
| 15.31 40 11 | AExi 15170 | 313 x 404 x 111 |
| 25.31 40 11 | AExB 25170 | 313 x 404 x 111 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|----------------|-----|-----|-----|-----|----|----|----|----|----|----|----|
| | 258 | 210 | 174 | 132 | 70 | 58 | 23 | 23 | | | |
| | 3 | 3 | 3 | 2 | 2 | 2 | 1 | 1 | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 81 | | | | | | | | | |
| | 16 | 27 | 54 | 209 | | | | | | | |
| | 20 | 11 | 31 | 60 | | | | | | | |
| | 25 | | 15 | 34 | 66 | | | | | | |
| | 35 | | | 10 | 26 | 64 | | | | | |
| | 50 | | | | 3 | 21 | 43 | | | | |
| | 63 | | | | | 7 | 24 | 87 | | | |
| | 80 | | | | | | 9 | 27 | 98 | | |
| | 100 | | | | | | | 11 | 26 | | |
| | 125 | | | | | | | | 10 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 105 | 68 |
| 16 | 50 | 28 |
| 20 | 39 | 26 |
| 25 | 20 | 12 |
| 32 | 14 | 7 |
| 40 | 6 | 4 |
| 50 | 5 | 3 |
| 63 | 5 | 3 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 381 |
| max. Bestückungslänge (mm) | 340 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.31 40 14 | AExe 05175 | 312 x 403 x 141 |
| 15.31 40 14 | AExi 15175 | 312 x 403 x 141 |
| 25.31 40 14 | AExB 25175 | 312 x 403 x 141 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 | |
|----------------|-----|-----|-----|-----|----|----|----|----|-----|----|----|----|
| | 258 | 207 | 174 | 132 | 70 | 58 | 23 | 23 | 18 | 14 | 14 | |
| | 3 | 3 | 3 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | |
| x A | 6 | | | | | | | | | | | |
| | 10 | 89 | | | | | | | | | | |
| | 16 | 30 | 59 | 230 | | | | | | | | |
| | 20 | 12 | 34 | 67 | | | | | | | | |
| | 25 | | 16 | 38 | 73 | | | | | | | |
| | 35 | | | 11 | 28 | 71 | | | | | | |
| | 50 | | | | 4 | 23 | 58 | | | | | |
| | 63 | | | | | 7 | 27 | 97 | | | | |
| | 80 | | | | | | 10 | 30 | 108 | | | |
| | 100 | | | | | | | 13 | 28 | | | |
| | 125 | | | | | | | | 11 | 29 | | |
| | 160 | | | | | | | | | 10 | 25 | |
| | 200 | | | | | | | | | | 9 | 22 |
| | 225 | | | | | | | | | | 3 | 12 |
| | 250 | | | | | | | | | | | 6 |
| | 315 | | | | | | | | | | | |
| | 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 147 | 95 |
| 16 | 70 | 43 |
| 20 | 55 | 32 |
| 25 | 28 | 18 |
| 32 | 17 | 10 |
| 40 | 12 | 7 |
| 50 | 7 | 4 |
| 63 | 6 | 3 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 381 |
| max. Bestückungslänge (mm) | 340 |
| Außenerde (mm ²) | 50 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.31 40 18 | AExe 05180 | 313 x 404 x 181 |
| 15.31 40 18 | AExi 15180 | 313 x 404 x 181 |
| 25.31 40 18 | AExB 25180 | 313 x 404 x 181 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 205 | 122 |
| 16 | 98 | 54 |
| 20 | 78 | 51 |
| 25 | 40 | 24 |
| 32 | 22 | 15 |
| 40 | 15 | 9 |
| 50 | 11 | 6 |
| 63 | 8 | 6 |
| 75 | | |
| 85 | | |

| Tragschiene | TS 35 |
|------------------------------|-------|
| Länge (mm) | 381 |
| max. Bestückungslänge (mm) | 340 |
| Außenerde (mm ²) | 50 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.31 40 23 | AExe 05185 | 313 x 404 x 227 |
| 15.31 40 23 | AExi 15185 | 313 x 404 x 227 |
| 25.31 40 23 | AExB 25185 | 313 x 404 x 227 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 246 | 162 |
| 16 | 126 | 72 |
| 20 | 100 | 68 |
| 25 | 54 | 33 |
| 32 | 30 | 20 |
| 40 | 18 | 12 |
| 50 | 15 | 9 |
| 63 | 12 | 8 |
| 75 | | |
| 85 | | |

| Tragschiene | TS 35 |
|------------------------------|-------|
| Länge (mm) | 381 |
| max. Bestückungslänge (mm) | 340 |
| Außenerde (mm ²) | 50 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.31 60 11 | AExe 05190 | 310 x 600 x 111 |
| 15.31 60 11 | AExi 15190 | 310 x 600 x 111 |
| 25.31 60 11 | AExB 25190 | 310 x 600 x 111 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 |
|----------------|-----|-----|-----|-----|-----|----|----|----|-----|----|----|
| | 399 | 321 | 270 | 204 | 108 | 90 | 36 | 36 | | | |
| | 3 | 3 | 3 | 2 | 2 | 2 | 1 | 1 | | | |
| x A | 6 | | | | | | | | | | |
| | 10 | 85 | | | | | | | | | |
| | 16 | 29 | 56 | 220 | | | | | | | |
| | 20 | 12 | 33 | 64 | | | | | | | |
| | 25 | | 15 | 36 | 69 | | | | | | |
| | 35 | | | 10 | 27 | 68 | | | | | |
| | 50 | | | | 4 | 22 | 56 | | | | |
| | 63 | | | | | 7 | 26 | 92 | | | |
| | 80 | | | | | | 10 | 29 | 103 | | |
| | 100 | | | | | | | 12 | 27 | | |
| | 125 | | | | | | | | 11 | | |
| | 160 | | | | | | | | | | |
| | 200 | | | | | | | | | | |
| | 225 | | | | | | | | | | |
| | 250 | | | | | | | | | | |
| | 315 | | | | | | | | | | |
| | 400 | | | | | | | | | | |
| 500 | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 150 | 68 |
| 16 | 76 | 28 |
| 20 | 60 | 24 |
| 25 | 30 | 12 |
| 32 | 20 | 7 |
| 40 | 10 | 4 |
| 50 | 8 | 3 |
| 63 | 6 | 3 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 581 |
| max. Bestückungslänge (mm) | 540 |
| Außenerde (mm ²) | 16 |



| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.31 60 18 | AExe 05195 | 310 x 600 x 181 |
| 15.31 60 18 | AExi 15195 | 310 x 600 x 181 |
| 25.31 60 18 | AExB 25195 | 310 x 600 x 181 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 | |
|----------------|-----|-----|-----|-----|-----|----|----|-----|-----|----|----|----|
| | 399 | 321 | 270 | 204 | 108 | 90 | 36 | 36 | 28 | 22 | 22 | |
| | 3 | 3 | 3 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | |
| x A | 6 | | | | | | | | | | | |
| | 10 | 104 | | | | | | | | | | |
| | 16 | 36 | 69 | 269 | | | | | | | | |
| | 20 | 15 | 40 | 78 | | | | | | | | |
| | 25 | | 19 | 44 | 85 | | | | | | | |
| | 35 | | | 13 | 33 | 83 | | | | | | |
| | 50 | | | | 5 | 27 | 68 | | | | | |
| | 63 | | | | | 9 | 32 | 113 | | | | |
| | 80 | | | | | | 12 | 35 | 126 | | | |
| | 100 | | | | | | | 15 | 33 | | | |
| | 125 | | | | | | | | 13 | 34 | | |
| | 160 | | | | | | | | | 11 | 30 | |
| | 200 | | | | | | | | | | 10 | 26 |
| | 225 | | | | | | | | | | 4 | 15 |
| | 250 | | | | | | | | | | | 8 |
| | 315 | | | | | | | | | | | |
| | 400 | | | | | | | | | | | |
| 500 | | | | | | | | | | | | |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 270 | 122 |
| 16 | 140 | 54 |
| 20 | 108 | 48 |
| 25 | 56 | 24 |
| 32 | 32 | 15 |
| 40 | 22 | 9 |
| 50 | 16 | 6 |
| 63 | 12 | 6 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 581 |
| max. Bestückungslänge (mm) | 540 |
| Außenerde (mm ²) | 50 |





| Bestell-Nr. | Typ | Abmessungen H x B x T (mm) |
|--------------------|------------|-------------------------------|
| 05.60 60 20 | AExe 05200 | 600 x 600 x 202 |
| 15.60 60 20 | AExi 15200 | 600 x 600 x 202 |
| 25.60 60 20 | AExB 25200 | 600 x 600 x 202 |

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



| | 1,5 | 2,5 | 4 | 6 | 10 | 16 | 25 | 35 | 50 | 70 | 95 | 120 | 150 | 185 | 240 |
|-----------|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|-----|-----|-----|
| | 532 | 428 | 360 | 204 | 162 | 135 | 108 | 108 | 56 | 22 | 22 | 18 | 18 | 15 | 15 |
| LN | 4 | 4 | 4 | 3 | 3 | 3 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 6 | | | | | | | | | | | | | | | |
| 10 | 142 | | | | | | | | | | | | | | |
| 16 | 49 | 95 | 368 | | | | | | | | | | | | |
| 20 | 20 | 55 | 107 | | | | | | | | | | | | |
| 25 | | 26 | 60 | 116 | | | | | | | | | | | |
| 35 | | | 18 | 45 | 113 | | | | | | | | | | |
| 50 | | | | 6 | 37 | 94 | | | | | | | | | |
| 63 | | | | | 12 | 43 | 154 | | | | | | | | |
| 80 | | | | | | 16 | 48 | 173 | | | | | | | |
| 100 | | | | | | | 20 | 45 | | | | | | | |
| 125 | | | | | | | | 2 | 18 | 46 | | | | | |
| 160 | | | | | | | | | 16 | 41 | | | | | |
| 200 | | | | | | | | | | 14 | 35 | 109 | | | |
| 225 | | | | | | | | | | 5 | 20 | 42 | | | |
| 250 | | | | | | | | | | | 10 | 26 | 54 | | |
| 315 | | | | | | | | | | | | 5 | 15 | 32 | |
| 400 | | | | | | | | | | | | | | 7 | 22 |
| 500 | | | | | | | | | | | | | | | 3 |

| M | Seite | |
|----|-------|-----|
| | A/B | C/D |
| 12 | 270 | 270 |
| 16 | 140 | 140 |
| 20 | 108 | 108 |
| 25 | 56 | 56 |
| 32 | 32 | 32 |
| 40 | 22 | 22 |
| 50 | 16 | 16 |
| 63 | 12 | 12 |
| 75 | | |
| 85 | | |

| | |
|------------------------------|-------|
| Tragschiene | TS 35 |
| Länge (mm) | 575 |
| max. Bestückungslänge (mm) | 540 |
| Außenerde (mm ²) | 120 |

