

## wall mounting socket outlet, switched, interlocked - housing dimensions 170x90




| Product description       |                                                    |
|---------------------------|----------------------------------------------------|
| BALS-Prd.-Nr              | 1611                                               |
| EAN                       | 4024941016117                                      |
| Product category          | Wall mounting socket outlet, switched, interlocked |
| Current                   | 16A                                                |
| Number of poles           | 5p                                                 |
| Arrangement of phases     | 3p+N+PE                                            |
| Position of earth contact | 6 h                                                |
| Voltage                   | 200/346 - 240/415V~                                |

| Product description    |                                                                                                              |
|------------------------|--------------------------------------------------------------------------------------------------------------|
| Frequency              | 50/60Hz                                                                                                      |
| Protection degree      | IP44                                                                                                         |
| Colour code            | red RAL 3000                                                                                                 |
| Colour of appliance    | Hinged lid red RAL 3000, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Control knob grey RAL 7035 |
| Connection design      | screwless spring terminals with Kontex-Kontakt                                                               |
| Maximum conductor size | 4,0 qmm                                                                                                      |
| Cable entry            | top entry M20 bottom entry M25/20                                                                            |
| Height                 | 190mm                                                                                                        |
| Width                  | 90mm                                                                                                         |
| Depth                  | 122mm                                                                                                        |
| Dimension of enclosure | 170x90 mm (HxW)                                                                                              |
| Material of enclosure  | Polycarbonate                                                                                                |
| Contacts               | the contacts are brass nickel plated, The contact carrier is made of polyamide                               |

| Additional technical properties |                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------|
|                                 | The cable entry is one at top open and two at bottom closed                                                 |
|                                 | In 0-position lockable for 3 padlocks with bow diameter up to 7 mm, Lower part of housing rotatable by 180° |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.615 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Carton        |
| Content amount | 1 ST          |
| EAN            | 4024941016117 |
| Length         | 205 mm        |
| Width          | 102 mm        |
| Height         | 134 mm        |
| Weight         | 0.675 kg      |
| Volume         | 2,118.48 ccm  |

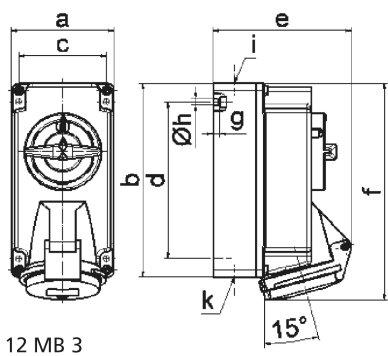

| Ampere  | 16     | 16     | 16     |  |  |  |
|---------|--------|--------|--------|--|--|--|
| Polzahl | 3      | 4      | 5      |  |  |  |
| a       | 90,0   | 90,0   | 90,0   |  |  |  |
| b       | 170,0  | 170,0  | 170,0  |  |  |  |
| c       | 77,0   | 77,0   | 77,0   |  |  |  |
| d       | 137,5  | 137,5  | 137,5  |  |  |  |
| e       | 108,0  | 114,0  | 121,0  |  |  |  |
| f       | 188,5  | 188,5  | 190,0  |  |  |  |
| g       | 6,0    | 6,0    | 6,0    |  |  |  |
| h ø     | 5,5    | 5,5    | 5,5    |  |  |  |
| i       | M20    | M20    | M20    |  |  |  |
| k       | M20/25 | M20/25 | M20/25 |  |  |  |
|         |        |        |        |  |  |  |
|         |        |        |        |  |  |  |