

## wall mounting socket outlet, switched, interlocked - housing dimensions 225x118




| Product description       |                                                       |
|---------------------------|-------------------------------------------------------|
| BALS-Prd.-Nr              | 16097                                                 |
| EAN                       | 4024941160971                                         |
| Product category          | TE wall mounting socket outlet, switched, interlocked |
| Current                   | 32A                                                   |
| Number of poles           | 3p                                                    |
| Arrangement of phases     | 2P+PE                                                 |
| Position of earth contact | 6 h                                                   |
| Voltage                   | 200 - 250V~                                           |

| Product description    |                                                                                                                                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency              | 50/60Hz                                                                                                                                     |
| Protection degree      | IP44                                                                                                                                        |
| Colour code            | blue RAL 5015                                                                                                                               |
| Colour of appliance    | Hinged lid blue RAL 5015, Housing bottom grey RAL 7035, Housing screws grey RAL 7035, Housing top grey RAL 7035, Control knob grey RAL 7035 |
| Connection design      | screwless spring terminals with Kontex-Kontakt                                                                                              |
| Maximum conductor size | 10,0 qmm                                                                                                                                    |
| Cable entry            | top entry M25/M25 bottom entry M25                                                                                                          |
| Height                 | 251mm                                                                                                                                       |
| Width                  | 118mm                                                                                                                                       |
| Depth                  | 137mm                                                                                                                                       |
| Dimension of enclosure | 225x118 mm (HxW)                                                                                                                            |
| Material of enclosure  | Polycarbonate                                                                                                                               |
| Contacts               | the contacts are brass nickel plated, The contact carrier is made of polyamide                                                              |

| Additional technical properties |                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------|
|                                 | The cable entry is one at top open, one at top is closed, and two at bottom are closed |
|                                 | In 0-position lockable for 3 padlocks with bow diameter up to 7 mm                     |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 1.17 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Carton        |
| Content amount | 1 ST          |
| EAN            | 4024941160971 |
| Length         | 275 mm        |
| Width          | 175 mm        |
| Height         | 137 mm        |
| Weight         | 1.295 kg      |
| Volume         | 5,737.5 ccm   |

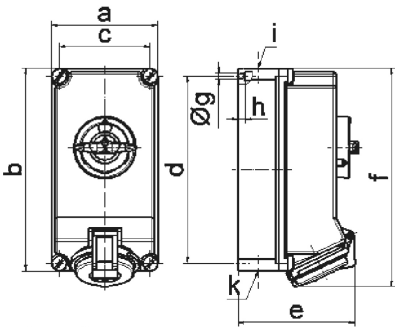

12 MB 24

| Ampere Polzahl | 16 4    | 16 5    | 32 3    | 32 4    | 32 5    |
|----------------|---------|---------|---------|---------|---------|
| a              | 118,0   | 118,0   | 118,0   | 118,0   | 118,0   |
| b              | 225,0   | 225,0   | 225,0   | 225,0   | 225,0   |
| c              | 101,0   | 101,0   | 101,0   | 101,0   | 101,0   |
| d              | 208,0   | 208,0   | 208,0   | 208,0   | 208,0   |
| e              | 126,0   | 134,0   | 137,0   | 137,0   | 144,0   |
| f              | 242,0   | 242,0   | 251,0   | 251,0   | 251,0   |
| g ø            | 6,5     | 6,5     | 6,5     | 6,5     | 6,5     |
| h              | 8,0     | 8,0     | 8,0     | 8,0     | 8,0     |
| i              | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 |
| k              | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 |