
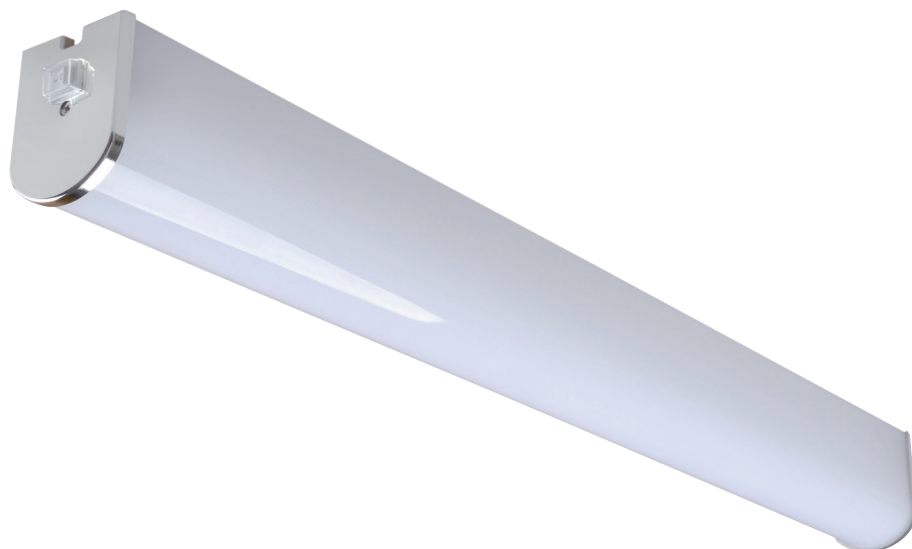




LED-Wandleuchte FEELIXX[®] 15W, 4000K, IP44,
chrom/weiß

**Leistungsmerkmale**

Die RED-Wandleuchte FEELIXX[®] IP44 ist mit seiner optimalen Lichtfarbe der ideale Begleiter für das Bad. Zudem besitzt die Leuchte mit CR >80 eine hohe Farbwiedergabe sowie eine schattenfreie Ausleuchtung. Die Leuchte ist aus Kunststoff mit verchromten Endkappen und besitzt einen Schalter.

Technische Daten:

- 15W
- 4000K
- 1300lm
- CRI >80
- Abstrahlwinkel 140°
- Schutzart IP44
- Lebensdauer 30.000 Stunden
- Schaltzyklen 30.000
- 5 Jahre Funktionsgarantie
- Maße 600x53x65mm

DEHA-Nummer

6685123

Artikelnummer

5650-20-0005

EAN

4046725400783

Kennzeichnung



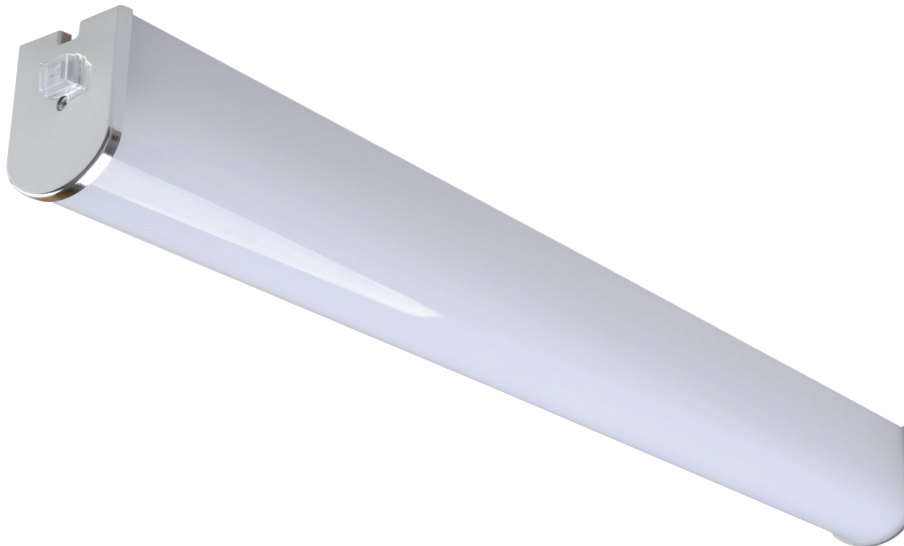
LED-Wandleuchte FEELIXX® 15W, 4000K, IP44, chrom/weiß

Allgemeine Daten

Merkmale	
Leuchtmittel	LED nicht austauschbar
Mit Leuchtmittel	ja
Fassung	ohne
Werkstoff	Aluminium
Gehäusefarbe	weiß
Spannungsart	AC
Nennspannung	220 - 240 V
LED-Nennstrom bei Konstantstrom	149 - 151 mA
Betriebsgerät	nicht erforderlich
Mit Betriebsgerät	ja
Dimmung 0-10 V	nein
Dimmung 1-10 V	nein
Dimmung DALI	nein
Dimmung DMX	nein
Dimmung DSI	nein
Dimmung Potenziometer (geräteintegriert)	nein
Dimmung GPRS	nein
Dimmung LineSwitch	nein
Dimmung herstellerepezifisch	nein
Dimmung Netzspannungsmodulation	nein
Dimmung Phasenabschnitt	nein
Dimmung Phasenanschnitt	nein
Dimmung programmierbar	nein
Dimmung RF	nein
Dimmung Sine Wave Reduction	nein
Dimmung Touch and Dim	nein
Dimmung Zigbee	nein
Dimmung mit Push-button	nein
Ohne Dimmfunktion	ja
Lichtverteiler	Diffusorlinse/-optik/-panel

Produktabbildungen

DEHA-Nr.	Typ	Artikelnummer	EAN	VPE
6685123	LED-FEELIXX® Wandleuchte 15W	5650-20-0005	4046725400783	1 Stück

LED-wall lamp FEELIXX[®] 15 W, 4000 K, IP44,
chrome/white

4 046725 400783

Performance features

RED wall light FEELIXX[®] IP44 with its optimal light colour is the ideal companion for the bath. In addition, the lamp with CR >80 has one high colour rendering and shadow-free illumination. The lamp is made of plastic chrome end caps and has a switch.

Technical data

- 15W
- 4000K
- 1300lm
- CRI>80
- Beam angle 140°
- Degree of protection IP44
- Lifetime 30,000 hours
- Switching cycles 30,000
- 5-year functional guarantee
- Dimensions 600x53x65 mm

General data

Light source LED:	light source (replaceable by professionals, but not recommended)
Material:	aluminium Housing color white
Type of voltage:	AC
Rated voltage:	220 - 240 V
LED nominal current at constant current	150 mA
Light distributor diffuser	lens/optics/panel
Rated life	30,000 h

DEHA number

6685123

Item number

5650-20-0005

EAN

4046725400783

label

Degree of protection	IP44
Protection class	II
Glow wire test according to IEC 60695-2-11	650 °C - 30 s
Suitable for lamp power	14...15 W
Max. system power	15 W
Rated luminous flux	1300 lm
Light colour	white
Colour temperature	4000K
Colour rendering index CRI	• 80 CRI
Dimensions WxHxL	65x53x600 mm
Type of wiring	termination
Number of poles	2
Connection type screw	screw terminal

This lamp contains an LED light source of energy efficiency class E: 14.4W 1720lm 119.4lm/W 15kWh/1000

LED-wall lamp FEELIXX® 15 W, 4000 K, IP44, chrome/white

General Data

Features	
Lamp type	LED not exchangeable
With light source	yes
Lamp holder	None
Material	Aluminium
Colour housing	White
Voltage type	AC
Nominal voltage	220 - 240 V
LED nominal current at constant current	149 - 151 mA
Type of control gear	Not required
Control gear included	yes
Dimming 0-10 V	no
Dimming 1-10 V	no
Dimming DALI	no
Dimming DMX	no
Dimming DSI	no
Dimming potentiometer (integrated)	no
Dimming GPRS	no
Dimming LineSwitch	no
Dimming manufacturer's proprietary system	no
Dimming mains voltage modulation	no
Dimming phase cut-off	no
Dimming phase cut-on	no
Dimming programmable	no
Dimming RF	no
Dimming Sine Wave Reduction	no
Dimming Touch and Dim	no
Dimming Zigbee	no
Dimming with push-button	no
No dim function	yes
Light distributor	Diffuser lens/optic/panel

Product pictures

DEHA no	Type	Item number	EAN	VPE
6685123	LED-FEELIXX® Wandleuchte 15W	5650-20-0005	4046725400783	1 Piece