

Panel mounting socket outlet straight - flange 75x75 fixing centers 60x60



Product description	
BALS-Prd.-Nr	13694
EAN	4024941136945
Product category	Panel mounting socket outlet QUICK-CONNECT, straight
Current	16A
Number of poles	4p
Arrangement of phases	3P+PE
Position of earth contact	7 h
Voltage	480 - 500V~

Product description	
Frequency	50/60Hz
Protection degree	IP44
Colour code	black RAL 9005
Colour of appliance	Hinged lid black RAL 9005, Enclosure grey RAL 7035
Connection design	screwless spring terminals with KONTEX-contact
Maximum conductor size	4,0 qmm
Cable entry	other
Height	82mm
Width	75mm
Depth	88mm
Flange size vertical in mm	75mm
Flange size horizontal in mm	75mm
Drill hole dist. vertical mm	60mm
Drill hole dist. horizontal mm	60mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of polyamide, the contacts are brass

Logistics data	
Weight/pcs	0.118 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941136945
Length	88 mm
Width	75 mm
Height	82 mm
Weight	0.119 kg
Volume	541.2 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941957717
Length	245 mm
Width	177 mm
Height	185 mm
Weight	1.313 kg
Volume	7,140 ccm

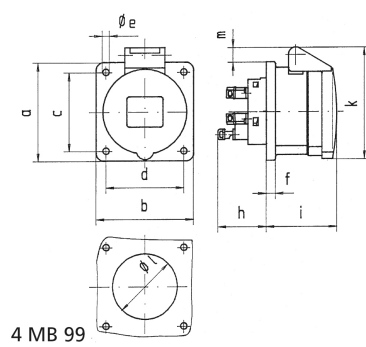
 4 MB 99	Ampere	16	16	16	32	32	32
	Polzahl	3	4	5	3	4	5
	a	75,0	75,0	75,0	75,0	75,0	75,0
	b	75,0	75,0	75,0	75,0	75,0	75,0
	c	60,0	60,0	60,0	60,0	60,0	60,0
	d	60,0	60,0	60,0	60,0	60,0	60,0
	e ø	5,5	5,5	5,5	5,5	5,5	5,5
	f	7,0	7,0	7,0	8,0	8,0	8,0
	h	35,5	35,5	35,5	50,0	50,0	50,0
	i	50,0	50,0	51,0	60,0	60,0	60,0
	k	74,0	84,0	91,0	94,0	94,0	102,0
	l ø	45,0	45,0	55,0	60,0	60,0	60,0
	m	3,5	7,0	11,5	12,0	12,0	17,0
	Leiter mm² min	1,5	1,5	1,5	2,5	2,5	2,5
	Leiter mm² max	4	4	4	10	10	10

Abbildung ähnlich - similar picture