

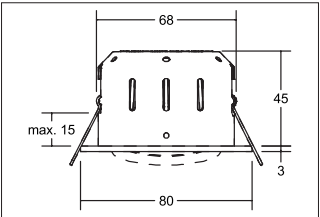



LED recessed spot INDIWO68, pivoted, dim2warm  
Artikel-Nr. 12463643

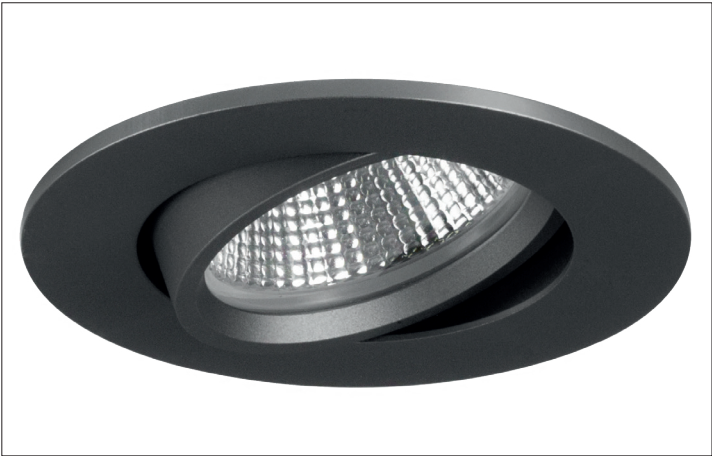

LED recessed spot INDIWO68, pivoted, dim2warm, titanium, round. In a compact design, for installation in tool-less rapid assembly systems. If the lamp is dimmed, the color temperature is reduced. Recessed spot suitable for direct mounting on normally flammable building materials. Thermal insulation allowed. Lamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Steel / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 430lm, Colour temperature: from 1.800 K up to 3.000 K, Light colour : White, Beam angle: 36°, Adjustability: Pivoted, With control gear: No, Control: Dimming depending on driver.

|             |                  |
|-------------|------------------|
| Artikel-Nr. | 12463643         |
| Stand:      | 26.10.2021 02:53 |

|                                    |                             |
|------------------------------------|-----------------------------|
| Colour temperature                 | 3000 K - 1800 K             |
| Colour                             | Titanium                    |
| Beam angle                         | 36 °                        |
| Amount of light sources / fittings | 1 Qty                       |
| Material                           | Aluminium / Steel / Plastic |
| Lamp holder                        | Plug&Play                   |
| Power                              | 6 W                         |
| Lamp                               | LED                         |
| Colour rendering                   | CRI > 80                    |
| Control                            | Dimming depending on driver |

|                      |                   |
|----------------------|-------------------|
| Outer diameter       | 80 mm             |
| Built-in diameter    | 68 mm             |
| Installation depth   | 45 mm             |
| Current              | 350 mA            |
| Degree of protection | IP20              |
| Protection class     | III               |
| Adjustability        | Pivoted           |
| Swivel angle         | 15 °              |
| Circuit type         | Series conduction |