




LED recessed spot set, on/off
Artikel-Nr. 38142053

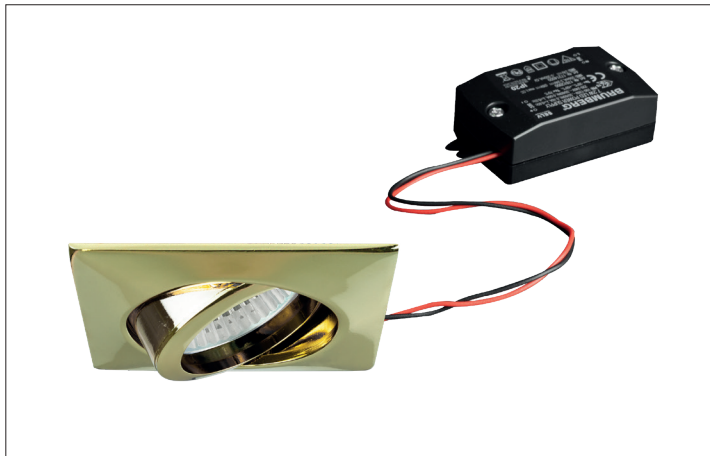

Ø (m)	E0(0°) [lx]
1.0 m	0.7 0.7 1173.2
2.0 m	1.4 1.4 283.3
3.0 m	2.1 2.0 130.4
4.0 m	2.8 2.7 73.3
5.0 m	3.5 3.4 46.9

LED recessed spot set, on/off, gold, square. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, on/off switchable, dimensions of converter: L 68 x W 35 x H 21 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Cast iron / Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, Control: on/off.

Artikel-Nr.	38142053
Stand:	26.10.2021 03:06

Colour temperature	3000 K
Colour	Gold
Length	83 mm
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Cast iron / Aluminium / Glass / Plastic
Power	6 W
Lamp	LED
Colour rendering	CRI > 80
Control	on/off

Built-in diameter	68 mm
Installation depth	50 mm
Voltage	230V AC 50Hz
Degree of protection	IP20
Protection class	II
Circlip	Without circlip
Adjustability	Pivoted
Length	83 mm
Width	83 mm
Swivel angle	25 °
Circuit type	Parallel conduction