
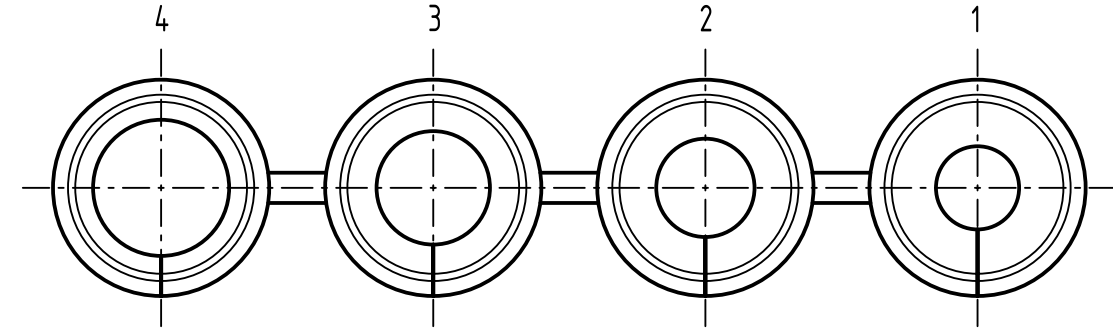
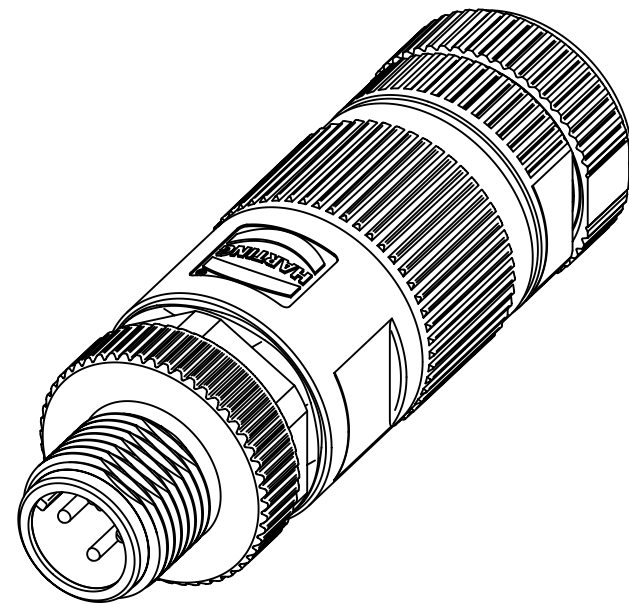
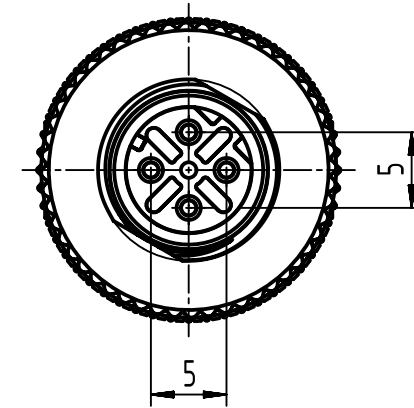


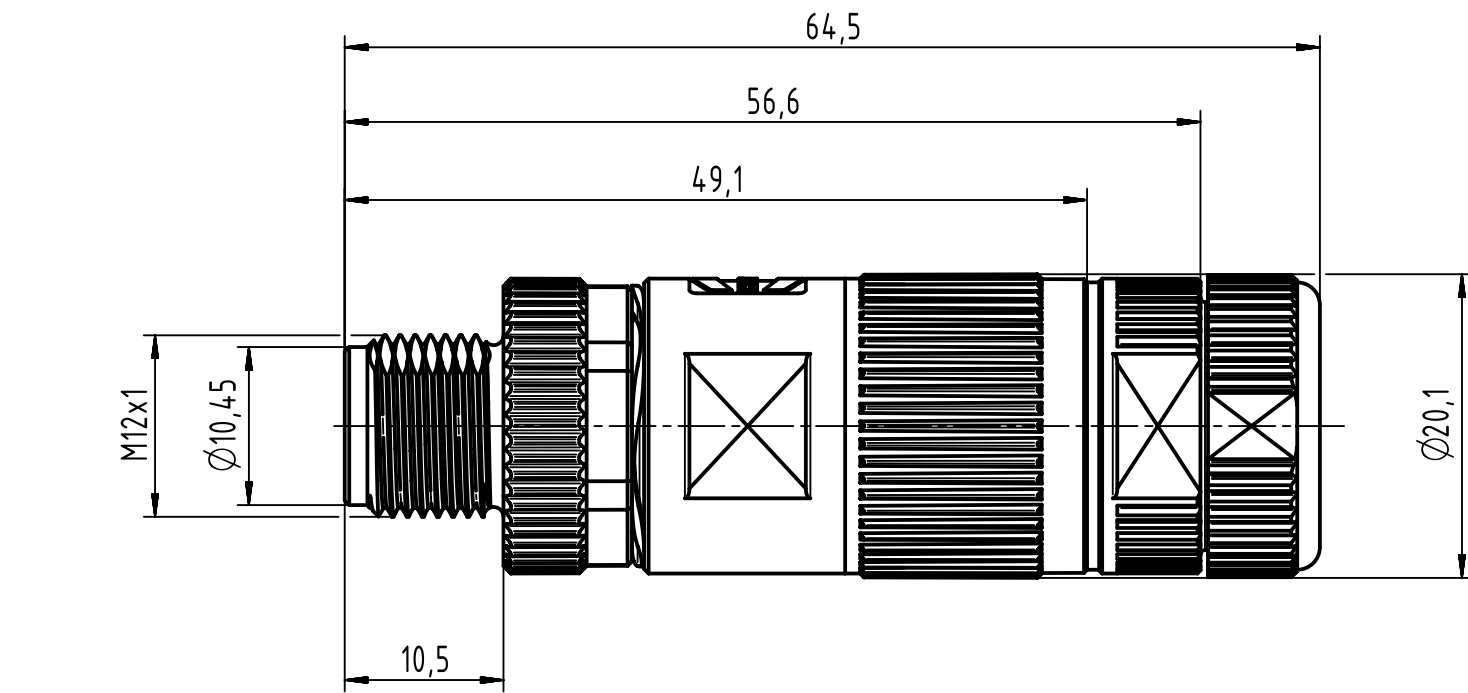

Sealing (1) - cable diameter 5.0-6.5 mm  
 Sealing (2) - cable diameter 6.0-7.5 mm  
 Sealing (3) - cable diameter 7.5-8.5 mm  
 Sealing (4) - cable diameter 8.5-9.5 mm

This set includes the shown M12 enclosure parts and the M12 insert.

Usable preLink termination blocks are:

- 20 82 000 0001 (8-pole AWG 22/23, yellow)
- 20 82 000 0003 (8-pole AWG 26/27, transparent)
- 20 82 000 0005 (XL) (4-pole AWG 22/23, black)

Depending of the used data cable the copper foil p/n 0945 800 0200 can be useful.

|                                                                                       |  |                                              |  |                                                 |  |                          |  |                             |  |                    |  |                                                          |  |             |  |
|---------------------------------------------------------------------------------------|--|----------------------------------------------|--|-------------------------------------------------|--|--------------------------|--|-----------------------------|--|--------------------|--|----------------------------------------------------------|--|-------------|--|
|  |  | All Dimensions in mm<br>Original Size DIN A3 |  | Scale<br>2:1                                    |  | Free size tol.           |  | Ref.                        |  |                    |  |                                                          |  |             |  |
|                                                                                       |  |                                              |  |                                                 |  |                          |  | Sub.                        |  |                    |  |                                                          |  |             |  |
|  |  | All rights reserved                          |  | Created by<br>TAMAS                             |  | Inspected by<br>PRIESTER |  | Standardisation<br>HOFFMANN |  | Date<br>2018-01-25 |  | State<br>Final Release                                   |  |             |  |
|                                                                                       |  | Department EC PD - RO                        |  | Title<br>Ha-VIS preLink M12 plug D-coded 4-pole |  |                          |  |                             |  |                    |  | Doc-Key / ECM-Nr.<br>100576964/UGD/000/C<br>500000130510 |  |             |  |
| HARTING Electronics GmbH<br>D-32339 Espelkamp                                         |  |                                              |  | Type<br>TB                                      |  | Number<br>20820050001    |  |                             |  |                    |  | Rev.<br>C                                                |  | Page<br>1/1 |  |
|                                                                                       |  |                                              |  |                                                 |  |                          |  |                             |  |                    |  |                                                          |  |             |  |