
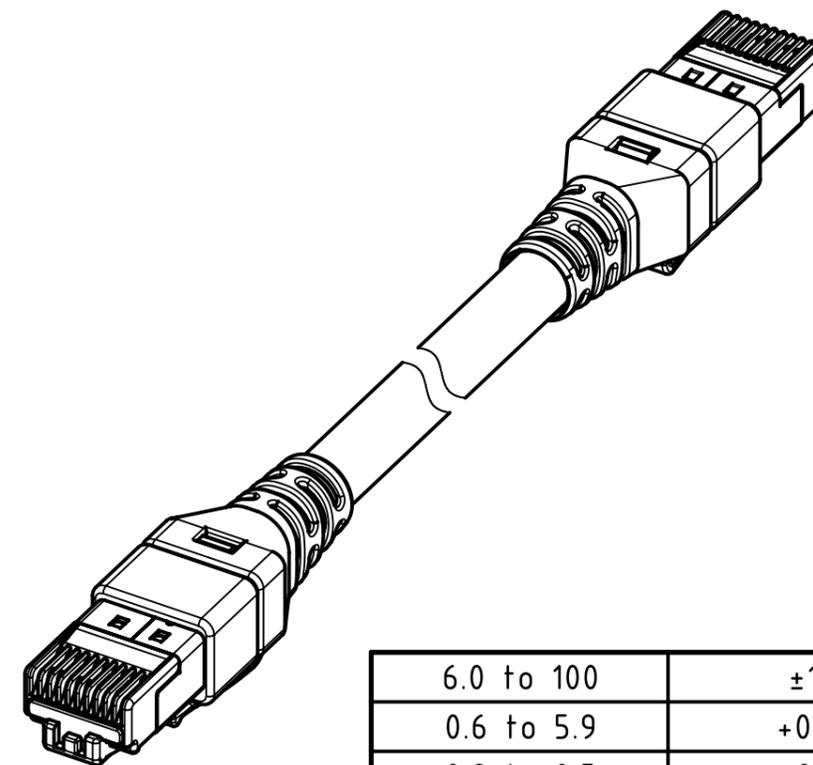
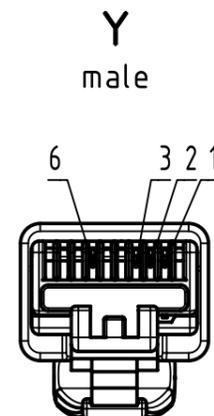
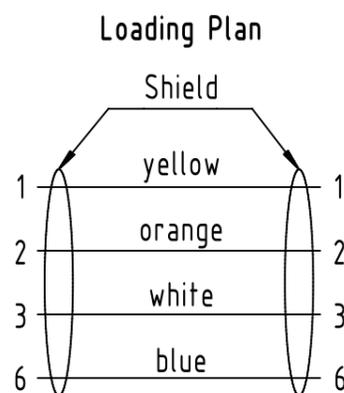
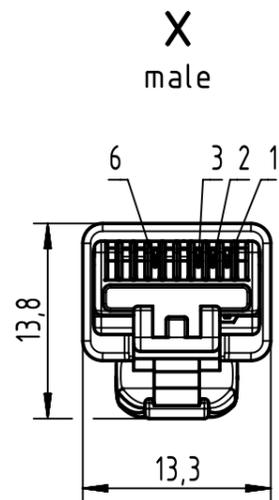


Connector Location A

Connector Location B

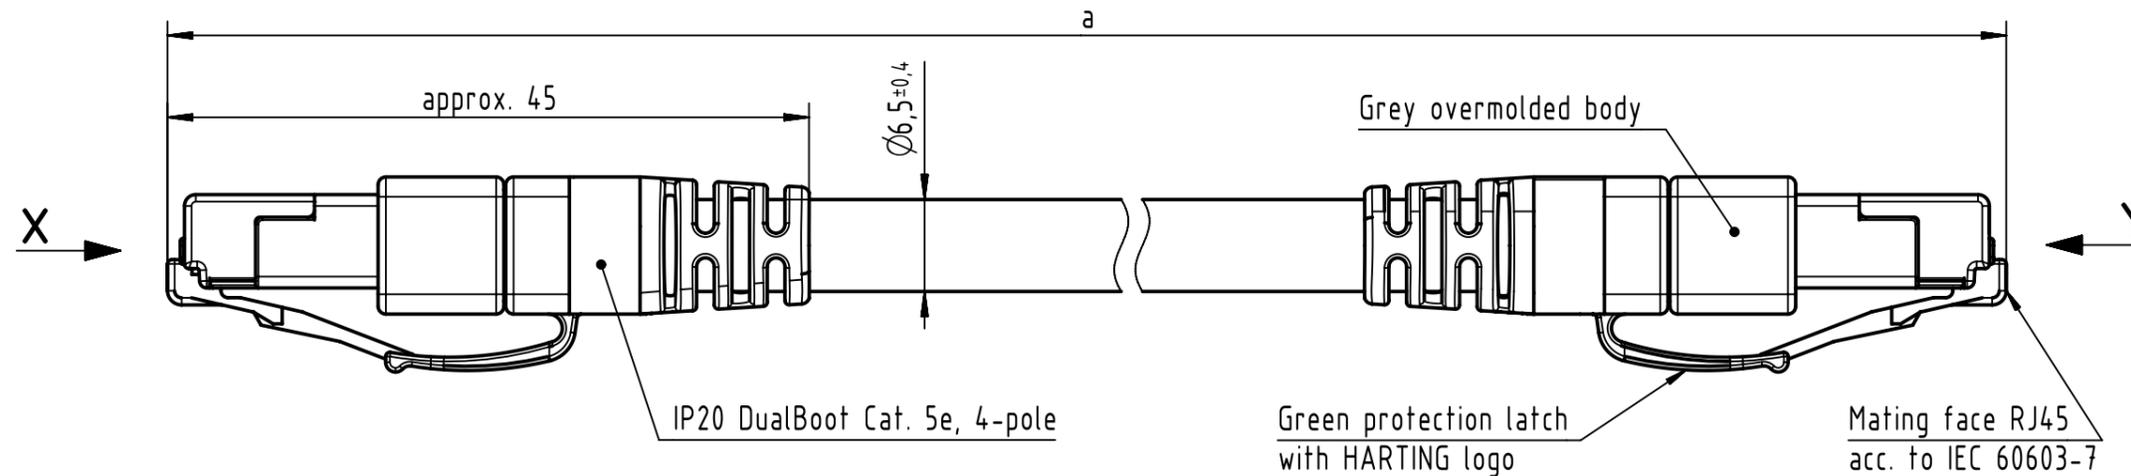

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

NOTE:

For lengths < 1.0m:

- relative positioning of the connectors to each other shall be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30°

For lengths ≥ 1.0m:

- relative positioning of the connectors to each other not obligatory

- Temperature range: -25°C ... +60°C

HAR PROFINET Typ C 4xAWG 22/7 PUR Trail. green	09486868004XXX
Type of cable	Part no.

	All rights reserved	Created by STOCHECIC Stochezi	Inspected by 402676 Gross	Standardisation MUNTEANV Muntean	Date 2023-06-12	State Final Release
	Department HCS - RO	Title RJ45 PROFINET cable PUR Cat.5 4p				Doc-Key / ECM-Nr. 100544207/UGD/045/G 50000245817
HARTING Customised Solutions D-32339 Espelkamp		Type TB	Number 09486868004XXX		Rev. G	Page 1/1