


connector - with TE screw terminals, for harsh applications

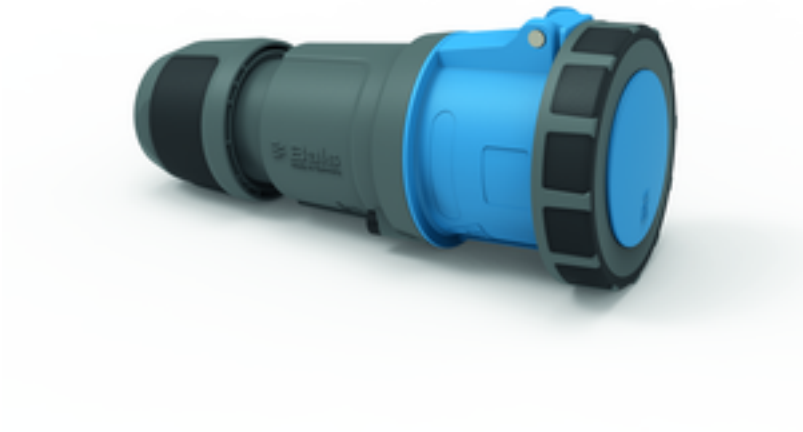


Product description	
BALS-Prd.-Nr	3191-1
EAN	4024941411219
Product category	TE connector
Current	125A
Number of poles	3p
Arrangement of phases	2P+PE
Position of earth contact	6 h
Voltage	200 - 250V~

Product description	
Frequency	50/60Hz
Protection degree	IP67
Colour code	blue RAL 5015
Colour of appliance	Hinged lid blue RAL 5015, Bajonet ring dark grey/black (RAL 7012/9005), Cable gland dark grey/black (RAL 7012/9005), Collar blue RAL 5015, Pusher black RAL 9005, Housing cover dark grey RAL 7012
Connection design	screw terminal as box terminal with Kontex-contact
Maximum conductor size	50.0 qmm
Cable entry	with cable gland
Height	289.5mm
Width	140.6mm
Depth	146.5mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	For cable diameter from 26 up to max. 50 mm, Screwless housing connection, Multi-Grip cable gland with gasket and integrated strain relief, With rubberized cable gland (SUSTAINABLE-GRIP), With rubberized bayonet ring (SUSTAINABLE-GRIP)

Logistics data	
Weight/pcs	1183.2 g / Piece

Logistics data	
Packaging	Bag
Content amount	1 ST
EAN	4024941411219
Length	146.5 mm
Width	140.6 mm
Height	289.5 mm
Weight	1,184.2 g
Volume	10,033.462 ccm
Packaging	Carton
Content amount	5 ST
EAN	4024941411226
Length	345 mm
Width	345 mm
Height	217 mm
Weight	6,251 g
Volume	25,828.425 ccm

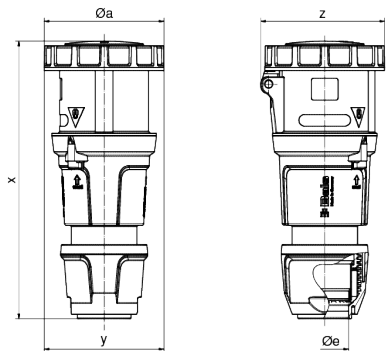

Ampere Polzahl	125 3	125 4	125 5
ø a	125,0	125,0	125,0
ø e	50,0	50,0	50,0
x	290,0	290,0	290,0
y	125,0	125,0	125,0
z	130,0	130,0	130,0
Cond. mm² min	16,0	16,0	16,0
Cond. mm² max	50,0	50,0	50,0



