

panel mounting socket outlet, straight - flange 75x75,  
fixing centers 60x60




| Product description       |                                                      |
|---------------------------|------------------------------------------------------|
| BALS-Prd.-Nr              | 13746                                                |
| EAN                       | 4024941137461                                        |
| Product category          | Panel mounting socket outlet Quick-Connect, straight |
| Current                   | 16A                                                  |
| Number of poles           | 5p                                                   |
| Arrangement of phases     | 3p+N+PE                                              |
| Position of earth contact | 7 h                                                  |
| Voltage                   | 277/480 - 288/500V~                                  |

| Product description            |                                                                                |
|--------------------------------|--------------------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                                        |
| Protection degree              | IP67                                                                           |
| Colour code                    | black RAL 9005                                                                 |
| Colour of appliance            | Hinged lid black RAL 9005, Enclosure grey RAL 7035, Bayonet ring grey RAL 7035 |
| Connection design              | screwless spring terminals with Kontex-Kontakt                                 |
| Maximum conductor size         | 4,0 qmm                                                                        |
| Cable entry                    | other                                                                          |
| Height                         | 92mm                                                                           |
| Width                          | 86mm                                                                           |
| Depth                          | 91mm                                                                           |
| Flange size vertical in mm     | 75mm                                                                           |
| Flange size horizontal in mm   | 75mm                                                                           |
| Drill hole dist. vertical mm   | 60mm                                                                           |
| Drill hole dist. horizontal mm | 60mm                                                                           |
| Material of enclosure          | Polyamide                                                                      |
| Contacts                       | The contact carrier is made of polyamide, The contacts are brass               |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.17 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941137461 |
| Length         | 91 mm         |
| Width          | 86 mm         |
| Height         | 92 mm         |
| Weight         | 0.171 kg      |
| Volume         | 719.992 ccm   |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941830218 |
| Length         | 245 mm        |
| Width          | 177 mm        |
| Height         | 185 mm        |
| Weight         | 1.833 kg      |
| Volume         | 7,140 ccm     |

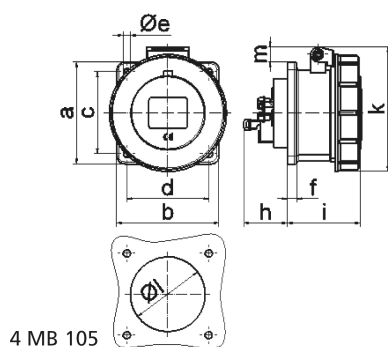

| Ampere Polzahl | 16 3 | 16 4 | 16 5 | 32 3  | 32 4  | 32 5  |
|----------------|------|------|------|-------|-------|-------|
| a              | 75,0 | 75,0 | 75,0 | 75,0  | 75,0  | 75,0  |
| b              | 75,0 | 75,0 | 75,0 | 75,0  | 75,0  | 75,0  |
| c              | 60,0 | 60,0 | 60,0 | 60,0  | 60,0  | 60,0  |
| d              | 60,0 | 60,0 | 60,0 | 60,0  | 60,0  | 60,0  |
| e ø            | 5,5  | 5,5  | 5,5  | 5,5   | 5,5   | 5,5   |
| f              | 7,0  | 7,0  | 7,0  | 8,0   | 8,0   | 8,0   |
| h              | 35,5 | 35,5 | 35,5 | 46,0  | 46,0  | 46,0  |
| i              | 57,0 | 58,0 | 57,0 | 65,0  | 65,0  | 65,0  |
| k              | 76,0 | 83,0 | 93,0 | 100,0 | 100,0 | 106,0 |
| l ø            | 45,0 | 45,0 | 55,0 | 60,0  | 60,0  | 60,0  |
| m              | 3,5  | 7,0  | 11,5 | 12,0  | 12,0  | 17,0  |
| Leiter mm² min | 1,5  | 1,5  | 1,5  | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 4    | 4    | 4    | 10    | 10    | 10    |