

panel mounting socket outlet, straight - flange 75x75,  
fixing centers 60x60




| Product description       |                                                      |
|---------------------------|------------------------------------------------------|
| BALS-Prd.-Nr              | 13685                                                |
| EAN                       | 4024941136853                                        |
| Product category          | Panel mounting socket outlet Quick-Connect, straight |
| Current                   | 16A                                                  |
| Number of poles           | 3p                                                   |
| Arrangement of phases     | 2P+PE                                                |
| Position of earth contact | 4 h                                                  |
| Voltage                   | 100 - 130V~                                          |

| Product description            |                                                                  |
|--------------------------------|------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                          |
| Protection degree              | IP44                                                             |
| Colour code                    | yellow RAL 1012                                                  |
| Colour of appliance            | Hinged lid yellow RAL 1012, Enclosure grey RAL 7035              |
| Connection design              | screwless spring terminals with Kontex-Kontakt                   |
| Maximum conductor size         | 4,0 qmm                                                          |
| Cable entry                    | other                                                            |
| Height                         | 79mm                                                             |
| Width                          | 75mm                                                             |
| Depth                          | 86mm                                                             |
| Flange size vertical in mm     | 75mm                                                             |
| Flange size horizontal in mm   | 75mm                                                             |
| Drill hole dist. vertical mm   | 60mm                                                             |
| Drill hole dist. horizontal mm | 60mm                                                             |
| Material of enclosure          | Polyamide                                                        |
| Contacts                       | The contact carrier is made of polyamide, The contacts are brass |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.102 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941136853 |
| Length         | 86 mm         |
| Width          | 75 mm         |
| Height         | 79 mm         |
| Weight         | 0.103 kg      |
| Volume         | 509.55 ccm    |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941828727 |
| Length         | 275 mm        |
| Width          | 175 mm        |
| Height         | 137 mm        |
| Weight         | 1.145 kg      |
| Volume         | 5,737.5 ccm   |

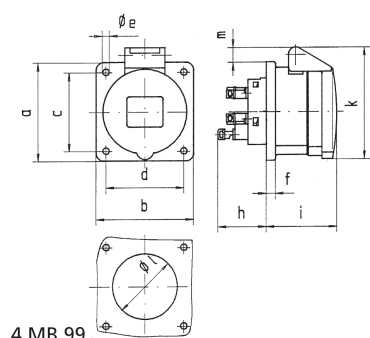

| Ampere         | 16   | 16   | 16   | 32   | 32   | 32    |  |
|----------------|------|------|------|------|------|-------|--|
| Polzahl        | 3    | 4    | 5    | 3    | 4    | 5     |  |
| a              | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 | 75,0  |  |
| b              | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 | 75,0  |  |
| c              | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 | 60,0  |  |
| d              | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 | 60,0  |  |
| e ø            | 5,5  | 5,5  | 5,5  | 5,5  | 5,5  | 5,5   |  |
| f              | 7,0  | 7,0  | 7,0  | 8,0  | 8,0  | 8,0   |  |
| h              | 35,5 | 35,5 | 35,5 | 50,0 | 50,0 | 50,0  |  |
| i              | 50,0 | 50,0 | 51,0 | 60,0 | 60,0 | 60,0  |  |
| k              | 74,0 | 84,0 | 91,0 | 94,0 | 94,0 | 102,0 |  |
| l ø            | 45,0 | 45,0 | 55,0 | 60,0 | 60,0 | 60,0  |  |
| m              | 3,5  | 7,0  | 11,5 | 12,0 | 12,0 | 17,0  |  |
| Leiter mm² min | 1,5  | 1,5  | 1,5  | 2,5  | 2,5  | 2,5   |  |
| Leiter mm² max | 4    | 4    | 4    | 10   | 10   | 10    |  |