

## wall mounting socket outlet - housing dimensions 170x118




| Product description       |                             |
|---------------------------|-----------------------------|
| BALS-Prd.-Nr              | 1164                        |
| EAN                       | 4024941011648               |
| Product category          | Wall mounting socket outlet |
| Current                   | 63A                         |
| Number of poles           | 5p                          |
| Arrangement of phases     | 3p+N+PE                     |
| Position of earth contact | 9 h                         |
| Voltage                   | 120/208 - 144/250V~         |

| Product description    |                                                                                                               |
|------------------------|---------------------------------------------------------------------------------------------------------------|
| Frequency              | 50/60Hz                                                                                                       |
| Protection degree      | IP67                                                                                                          |
| Colour code            | blue RAL 5015                                                                                                 |
| Colour of appliance    | Hinged lid blue RAL 5015, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Bayonet ring grey RAL 7035 |
| Connection design      | screw terminal as box terminal with Kontex-contact                                                            |
| Maximum conductor size | 25.0 qmm                                                                                                      |
| Cable entry            | top entry M40 bottom entry M32                                                                                |
| Height                 | 228mm                                                                                                         |
| Width                  | 118mm                                                                                                         |
| Depth                  | 176mm                                                                                                         |
| Dimension of enclosure | 170x118 mm (HxW)                                                                                              |
| Material of enclosure  | Polycarbonate                                                                                                 |
| Contacts               | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated      |

| Additional technical properties |                                                             |
|---------------------------------|-------------------------------------------------------------|
|                                 | The cable entry is one at top open and two at bottom closed |
|                                 | Lower part of housing rotatable by 180°                     |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.87 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Bag           |
| Content amount | 1 ST          |
| EAN            | 4024941011648 |
| Length         | 176 mm        |
| Width          | 118 mm        |
| Height         | 228 mm        |
| Weight         | 0.871 kg      |
| Volume         | 4,735.104 ccm |
| Packaging      | Carton        |
| Content amount | 5 ST          |
| EAN            | 4024941827577 |
| Length         | 345 mm        |
| Width          | 345 mm        |
| Height         | 217 mm        |
| Weight         | 4.685 kg      |
| Volume         | 24,276 ccm    |

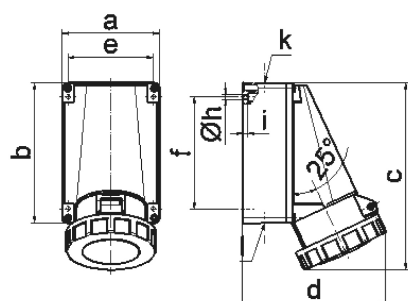

1 MB 3

| Ampere Polzahl | 63 3   | 63 4   | 63 5   |  |  |  |  |
|----------------|--------|--------|--------|--|--|--|--|
| a              | 118,0  | 118,0  | 118,0  |  |  |  |  |
| b              | 170,0  | 170,0  | 170,0  |  |  |  |  |
| c              | 228,0  | 228,0  | 228,0  |  |  |  |  |
| d              | 176,0  | 176,0  | 176,0  |  |  |  |  |
| e              | 104,0  | 104,0  | 104,0  |  |  |  |  |
| f              | 136,0  | 136,0  | 136,0  |  |  |  |  |
| h ø            | 6,1    | 6,1    | 6,1    |  |  |  |  |
| i              | 6,0    | 6,0    | 6,0    |  |  |  |  |
| k              | M40    | M40    | M40    |  |  |  |  |
| l              | M32/32 | M32/32 | M32/32 |  |  |  |  |
| Leiter mm² min | 6      | 6      | 6      |  |  |  |  |
| Leiter mm² max | 25     | 25     | 25     |  |  |  |  |