



441...

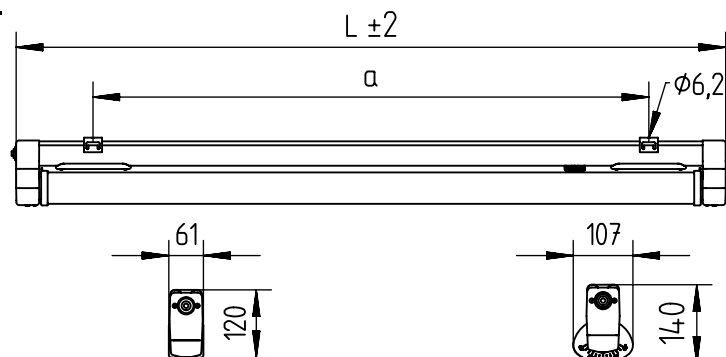

1x58W	1551	1280 ± 80
1x36W	1251	980 ± 80
1x18W	641	420 ± 30
Ausführung	L	a

1x49/80W	1500	1230 ± 80
1x39W	900	650 ± 50
1x28/54W	1200	930 ± 80
1x24W	600	330 ± 50
Ausführung	L	a

442...

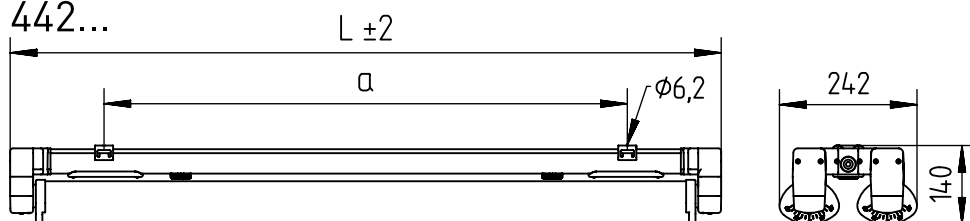

2x58W	1551	1220 ± 80
2x36W	1251	920 ± 80
Ausführung	L	a

2x49/80W	1500	1230 ± 80
2x39W	900	630 ± 50
2x28/54W	1200	930 ± 80
Ausführung	L	a

* = „Auch zur Verwendung in einer Umgebung, in der eine Ablagerung von leitfähigem Staub auf der Leuchte zu erwarten ist.“
 „Also for use in environments where an accumulation of conductive dust on the luminaire may be expected.“

NORKA

Norddeutsche Kunststoff-
und Elektrogesellschaft
Stäcker mbH & Co. KG

Lichttechnische Spezialfabrik

Kontakt
Weidestraße 122a
22083 Hamburg
Germany


Tel.: +49 40 513009-0
Fax: +49 40 513009-28
info@norka.de
www.norka.de

Montageanleitung 9165

- (GB) Mounting Instructions
- (F) Notice de Montage
- (E) Instrucciones de Montaje
- (I) Istruzione per l'Installazione
- (P) Instrucoes de montagem
- (NL) Montage Voorschrift
- (DK) Monteringsvejledning
- (S) Montageanvisning
- (FIN) Asennusohje
- (N) Montasjeveiledning
- (PL) Instrukcja montażu

441...

442...

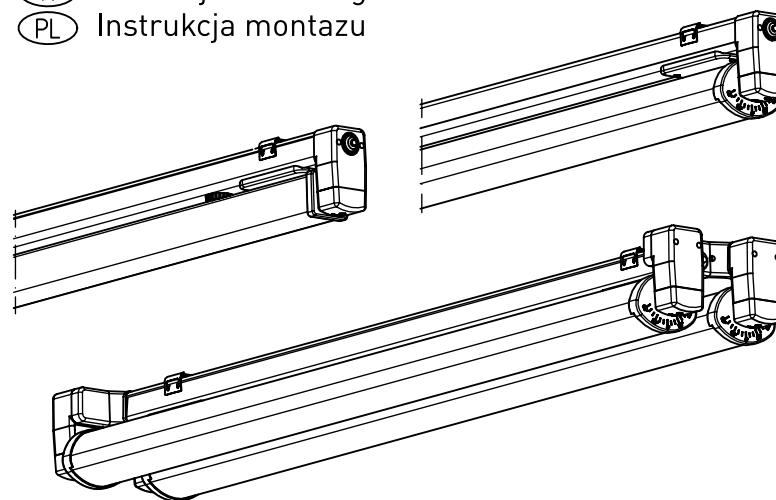

441...

442...

441... T8

 IP 65/IP 67    

230-240 V 0/50-60 Hz

230 V 50 Hz

max. 3,7 kg

441... T5 442... T5/T8

 IP 65    

230-240 V 0/50-60 Hz

230 V 50 Hz

max. 2,9 kg max. 5,6 kg

NORKA

