

Han pneumatic module for 2 contact, male

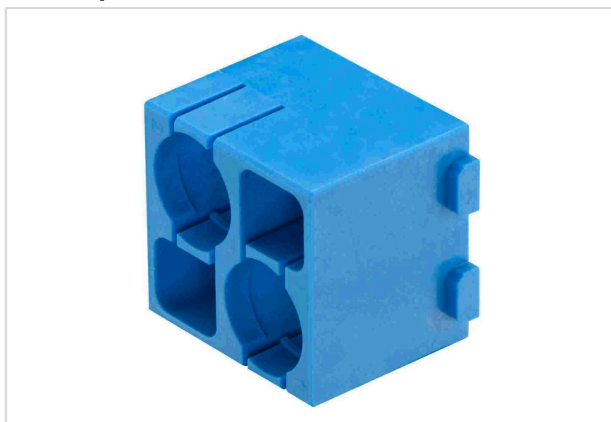


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 14 002 3501 |
| Specification | Han pneumatic module for 2 contact, male |
| HARTING eCatalogue | https://harting.com/09140023501 |

Identification

| | |
|--------------------|-----------------------|
| Category | Modules |
| Series | Han-Modular® |
| Type of module | Han® Pneumatic module |
| Size of the module | Double module |

Version

| | |
|--------------------|-----------------------------------|
| Gender | Male |
| Number of contacts | 2 |
| Details | Please order contacts separately. |

Technical characteristics

| | |
|----------------------|----------------|
| Limiting temperature | -40 ... +85 °C |
| Mating cycles | ≥10,000 |

Material properties

| | |
|---|--------------------|
| Material (insert) | Polycarbonate (PC) |
| Colour (insert) | Blue |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |



Pushing Performance
Since 1945

Material properties

| | |
|-------------------------------------|------------------------------|
| REACH SVHC substances | Not contained |
| Fire protection on railway vehicles | EN 45545-2 (2020-08) |
| Requirement set with Hazard Levels | R22 (HL 1-3) R23 (HL 1-3) |

Specifications and approvals

| | |
|----------------|--------------------------|
| Specifications | IEC 61984 IEC 60664-1 |
|----------------|--------------------------|

Commercial data

| | |
|--------------------------------|---|
| Packaging size | 2 |
| Net weight | 12 g |
| Country of origin | China |
| European customs tariff number | 85389099 |
| GTIN | 5713140184862 |
| eCl@ss | 27440220 Module for industrial connectors (pneumatic) |
| ETIM | EC000438 |
| UNSPSC 24.0 | 39121552 |