



LED recessed downlight set, IP54, on/off
Artikel-Nr. 38267073

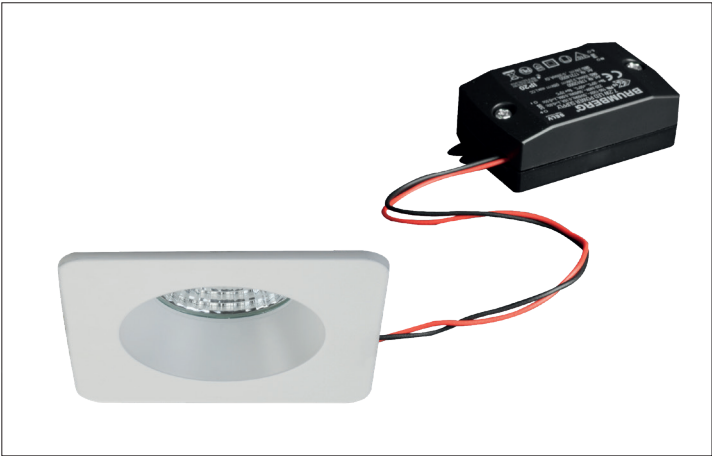

LED recessed downlight set, IP54, on/off, white, square. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, on/off switchable, dimensions of converter: L 68 x W 35 x H 21 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP54*, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 540lm, Colour temperature: 2.700 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: Yes, Control: on/off.

Artikel-Nr.	38267073
Stand:	25.10.2021 21:51

Colour temperature	2700 K
Colour	White
Length	82 mm
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Glass / Plastic
Power	6 W
Lamp	LED
Colour rendering	CRI > 80
Control	on/off

Built-in diameter	68 mm
Installation depth	58 mm
Voltage	230V AC 50Hz
Degree of protection	IP54 *
Protection class	II
Circlip	Without circlip
Adjustability	Not adjustable
Length	82 mm
Width	82 mm
Circuit type	Parallel conduction