

Connector Location A

Connector Location B

Mating face RJ45
acc. to IEC 60603-7


X

Y

Han 3A RJ45 Hybrid AC, (8+3)-pole, (metal black)

X
male

Y
male


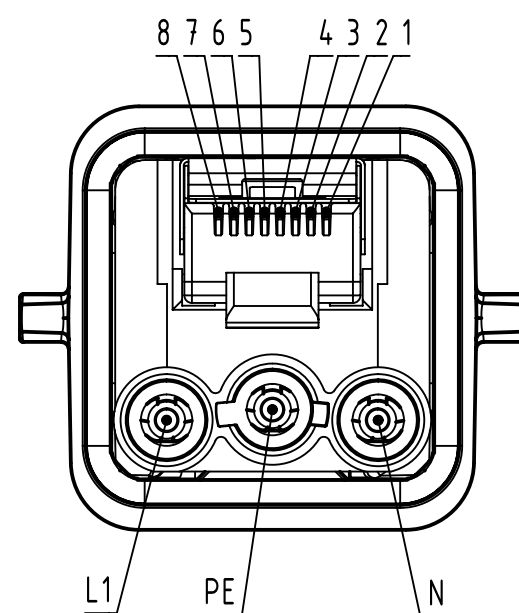


Loading plan
acc. to TIA/EIA 568A
(Data)

Shield			
1	white/green	1	
2	green	2	
3	white/orange	3	
4	blue	4	
5	white/blue	5	
6	orange	6	
7	white/brown	7	
8	brown	8	

Loading Plan
(Power AC version)

L1	black	L1
N	blue	N
PE	green/yellow	PE

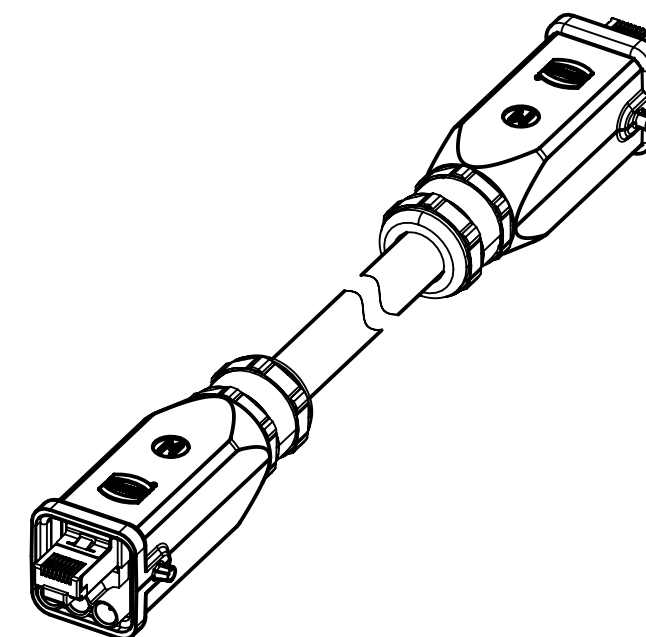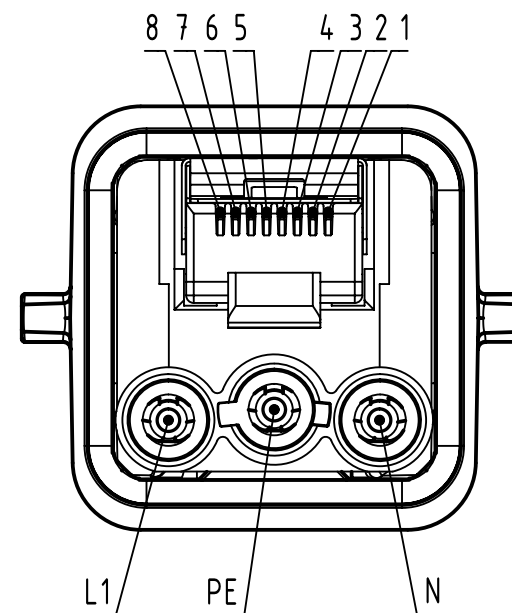

- Protection level: IP65/67
- Temperature range: -30°C ... +70°C

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by BANIUD Baniu		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean		Date 2023-09-13	
Department HCS - RO		Title Han 3A RJ45 Hybrid Cable Assembly		State Final Release		Doc-Key / ECM-Nr. 100154019/UGD/016/C 500000248062			
HARTING Customised Solutions		Type TB		Number 335721Y0YY000Y		Rev. C		Page 1/2	
D-32339 Espelkamp									



All Dimensions
in mm

Tech. Character.

Free size tol.

According to production drawing



All rights reserved

Department HCS - RO

HARTING Customised Solutions

D-32339 Espelkamp

Created by

BANCIUD

Banciu

Inspected by

COSTEA

Costea

Standardisation

MUNTEANV

Muntean

Date

2023-09-13

State

Final Release

Title
Han 3A RJ45 Hybrid Cable Assembly

Type

TB

Number

335721Y0YY000Y

Rev.

C

Page

2/2