

## wall mounting socket outlet - housing dimensions 126x83




| Product description       |                             |
|---------------------------|-----------------------------|
| BALS-Prd.-Nr              | 1123                        |
| EAN                       | 4024941011235               |
| Product category          | Wall mounting socket outlet |
| Current                   | 32A                         |
| Number of poles           | 5p                          |
| Arrangement of phases     | 3p+N+PE                     |
| Position of earth contact | 9 h                         |
| Voltage                   | 120/208 - 144/250V~         |
| Frequency                 | 50/60Hz                     |

| Product description    |                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------|
| Protection degree      | IP44                                                                                                    |
| Colour code            | blue RAL 5015                                                                                           |
| Colour of appliance    | Hinged lid blue RAL 5015, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Collar grey RAL 7035 |
| Connection design      | with screw terminal                                                                                     |
| Maximum conductor size | 10,0 qmm                                                                                                |
| Cable entry            | 1xM25 top, 2xM25 bottom                                                                                 |
| Height                 | 157mm                                                                                                   |
| Width                  | 83mm                                                                                                    |
| Depth                  | 136mm                                                                                                   |
| Dimension of enclosure | 126x83 mm (HxW)                                                                                         |
| Material of enclosure  | Polyamide                                                                                               |
| Contacts               | The contact carrier is made of polyamide, The contacts are brass                                        |

| Additional technical properties |                                                             |
|---------------------------------|-------------------------------------------------------------|
|                                 | The cable entry is one at top open and two at bottom closed |
|                                 | Lower part of housing rotatable by 180°                     |
|                                 | 4 cut out fixing holes in the lower part of housing         |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.389 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Bag           |
| Content amount | 1 ST          |
| EAN            | 4024941011235 |
| Length         | 137 mm        |
| Width          | 84 mm         |
| Height         | 158 mm        |
| Weight         | 0.39 kg       |
| Volume         | 1,818.264 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941840859 |
| Length         | 330 mm        |
| Width          | 216 mm        |
| Height         | 260 mm        |
| Weight         | 4.116 kg      |
| Volume         | 17,062.5 ccm  |

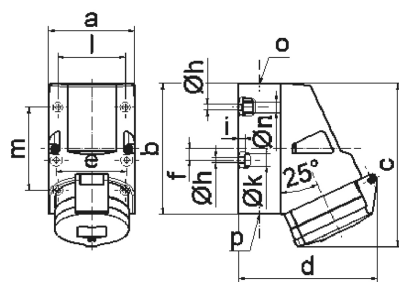

1 MB 2

| Ampere<br>Polzahl          | 16<br>4 | 16<br>5 | 32<br>3 | 32<br>4 | 32<br>5 |  |
|----------------------------|---------|---------|---------|---------|---------|--|
| a                          | 83,0    | 83,0    | 83,0    | 83,0    | 83,0    |  |
| b                          | 126,0   | 126,0   | 126,0   | 126,0   | 126,0   |  |
| c                          | 153,0   | 155,0   | 155,0   | 155,0   | 155,0   |  |
| d                          | 127,0   | 130,0   | 130,0   | 130,0   | 136,0   |  |
| e                          | 68,0    | 68,0    | 68,0    | 68,0    | 68,0    |  |
| f                          | 11,0    | 11,0    | 11,0    | 11,0    | 11,0    |  |
| h ø                        | 5,5     | 5,5     | 5,5     | 5,5     | 5,5     |  |
| i                          | 6,5     | 6,5     | 6,5     | 6,5     | 6,5     |  |
| k ø                        | 12,0    | 12,0    | 12,0    | 12,0    | 12,0    |  |
| l                          | 65,0    | 65,0    | 65,0    | 65,0    | 65,0    |  |
| m                          | 80,0    | 80,0    | 80,0    | 80,0    | 80,0    |  |
| n ø                        | 10,0    | 10,0    | 10,0    | 10,0    | 10,0    |  |
| o                          | M25     | M25     | M25     | M25     | M25     |  |
| p                          | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 |  |
| Leiter mm <sup>2</sup> min | 1,5     | 1,5     | 2,5     | 2,5     | 2,5     |  |
| Leiter mm <sup>2</sup> max | 4       | 4       | 10      | 10      | 10      |  |