

Installation Equipment and Accessories

STAHL

Cable gland

With reduction sealing insert

8161/8-M16-0902-L Art. No. 239195



- For safe cable entry in Ex e and Ex i areas
- Can be used at temperatures of between -60 ... +75 °C, degree of protection IP68
- Available in Ex e and Ex i versions (Ex i version distinguished by its blue cap nut)
- Suitable for cable diameters from 1 ... 48 mm
- Versions with multi-seal inserts

WebCode 8161B



R. STAHL's 8161/7 and 8161/8 series cable entries can be used to safely run cables into Ex e enclosures. They are suitable for cables between 1 and 48 mm in diameter. They are available for Ex e and Ex i circuits – the Ex i version can be distinguished by its blue cap nut. An integrated stopping plug can be used to seal any cable entries that are not being used.

Technical Data

Explosion Protection

Application range (zones)	1 2 21 22
IECEx gas certificate	IECEx PTB 14.0011 X
IECEx gas explosion protection	Ex eb IIC Gb
IECEx dust certificate	IECEx PTB 14.0011 X
IECEx dust explosion protection	Ex tb IIIC Db
ATEX gas certificate	PTB 14 ATEX 1008 X
ATEX gas explosion protection	Ex II 2 G Ex eb IIC Gb
ATEX dust certificate	PTB 14 ATEX 1008 X
ATEX dust explosion protection	Ex II 2 D Ex tb IIIC Db
EAC certificate	TS RU S-DE.AA71.B.00083
EAC gas explosion protection	Ex 1 Ex e II Gb X
EAC dust explosion protection	Ex tb IIIC Db X
Certificates	ATEX (PTB), Brazil (ULB), EAC (LPE), IECEx (PTB), Korea (KGS)

Electrical Data

Ex version	Ex i
------------	------

Ambient Conditions

Ambient temperature	-40 °C ... +75 °C
Use at the height of	< 2000 m

Mechanical Data

Degree of protection (IP)	IP66
Degree of protection note	IP68 at 5 bar 30 min. (IP protection according to IEC/EN 60529)
Sealing material	EPDM profile seal
Material sealing ring	EPDM
Material	Polyamide

Cable gland


With reduction sealing insert

8161/8-M16-0902-L Art. No. 239195

Mechanical Data

Material 2	Glass fibre reinforced
Silicone-free	Yes
Self-extinguishing	Yes
Flame retardant	Yes
Halogen-free	Yes
Surface resistance	$\leq 10^{13} \Omega$
Clamping range	2 – 9 mm
Clamping range max.	9 mm
Clamping range min.	2 mm
Armouring type	Unarmoured cable types
Dimension L	37 ... 43 mm
Dimension d1	22 mm
Dimension d2	10.3 mm
Dimension d4	9.3 mm
Width across corners	22 mm
Width across flats	20 mm
Thread size	M16
Thread length	15 mm
Thread pitch	1,5 mm
Impact strength	4 J
Impact strength	7 J
Impact strength note	Installation only in areas with a low risk of mechanical damage. Protect cable gland from mechanical damage.
Colour	Blue
Lot size	50
Weight	0.009 kg
Weight	0.02 lb

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

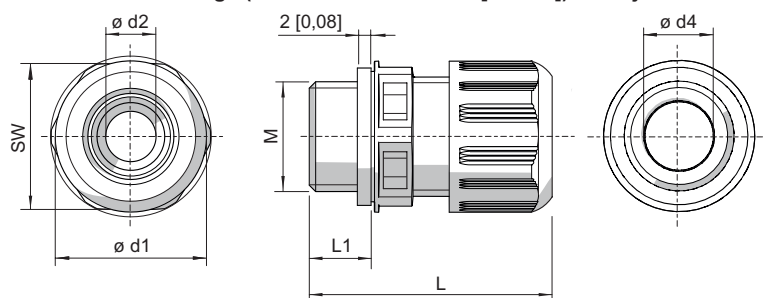

M = Thread size
SW = Width across flats
L1 = Thread length
L = Dimension L

Cable glands without bend protection

Thread size	Width across flats	Dimension L	Dimension L (with long thread)	Thread length	Thread length (long thread)	Clamping range	Clamping range + reduction sealing insert	Dimension d1	Dimension d2	Dimension d4
-------------	--------------------	-------------	--------------------------------	---------------	-----------------------------	----------------	---	--------------	--------------	--------------

Installation Equipment and Accessories

STAHL

Cable gland

With reduction sealing insert

8161/8-M16-0902-L Art. No. 239195


M12	16.00 mm	29 ... 34 mm	35 ... 40 mm	9.000 mm	15.000 mm	3.00 - 6.00 mm	1.00 - 6.00 mm	18 mm	7.3 mm	6.3 mm
M16	20.00 mm	31 ... 37 mm	37 ... 43 mm	9.000 mm	15.000 mm	5.00 - 9.00 mm	2.00 - 9.00 mm	22 mm	10.3 mm	9.3 mm
M20	24.00 mm	36 ... 43 mm	41 ... 48 mm	10.000 mm	15.000 mm	7.00 - 13.00 mm	4.00 - 13.00 mm	27 mm	13.3 mm	13.3 mm
M25	29.00 mm	38 ... 46 mm	43 ... 51 mm	10.000 mm	15.000 mm	10.00 - 17.00 mm	7.00 - 17.00 mm	32 mm	17.3 mm	17.3 mm
M32	36.00 mm	42 ... 50 mm	45 ... 53 mm	12.000 mm	15.000 mm	13.00 - 21.00 mm	9.00 - 21.00 mm	40 mm	21.3 mm	21.3 mm
M40	46.00 mm	52 ... 65 mm	58 ... 71 mm	12.000 mm	18.000 mm	17.00 - 28.00 mm	12.00 - 28.00 mm	51 mm	28.3 mm	30 mm
M50	55.00 mm	59 ... 72 mm	63 ... 76 mm	14.000 mm	18.000 mm	23.00 - 35.00 mm	16.00 - 35.00 mm	61 mm	35.3 mm	40 mm
M63	68.00 mm	64 ... 78 mm	67 ... 81 mm	15.000 mm	18.000 mm	34.00 - 48.00 mm	28.00 - 48.00 mm	75 mm	48.3 mm	53 mm

Accessories and Spare Parts

Flat gasket (standard), EPDM (-40 ... +75 °C)

Replacement seals for cable glands

Art. No.



For cable glands 8161/-M16-09.. Lot size: 100
Connection thread: M16

222370

For cable glands 8161/-M16-09... Lot size: 50
Connection thread: M16

222363

Locknut, brass nickel-plated (-60 ... +75 °C)

To fasten the cable glands in through holes

Art. No.




Material: Nickel-plated brass Lot size: 100
Thread size: M16

241519

Plug (-60 ... +75 °C)

For closing unused cable glands

Art. No.



Thread size without reduction sealing insert: M12 Lot size: 50
Thread size with reduction sealing insert: M16
Diameter: 6 mm
Material: Polyamide

240046


Thread size without reduction sealing insert: M16 Lot size: 50
Thread size with reduction sealing insert: M20
Diameter: 8 mm
Material: Polyamide

240048

Reduction sealing insert (standard), EPDM (-40 ... +75 °C)

For cable glands

Art. No.



Connection thread: M16 x 1.5 Lot size: 50
Clamping range: 2 – 6 mm

239445

Installation Equipment and Accessories


STAHL

Cable gland

With reduction sealing insert

8161/8-M16-0902-L Art. No. 239195

Special key




Thread size: M16 Packaging unit: 1

Art. No.

114207

Flat gasket silicone (-60 ... +75°C)

Replacement seals for low temperature



For cable glands 8161/-M16-09.. Lot size: 100
Connection thread: M16

Art. No.

240248

Locknut, plastic (-40 ... +75 °C)

To fasten the cable glands in through holes




Material: Polyamide Lot size: 100
Thread size: M16

Art. No.

239461

Reduction sealing insert, silicone (-60 ... +75 °C)

For low temperature



Connection thread: M16 x 1.5 Lot size: 50
Clamping range: 2 – 6 mm

Art. No.

239453

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.