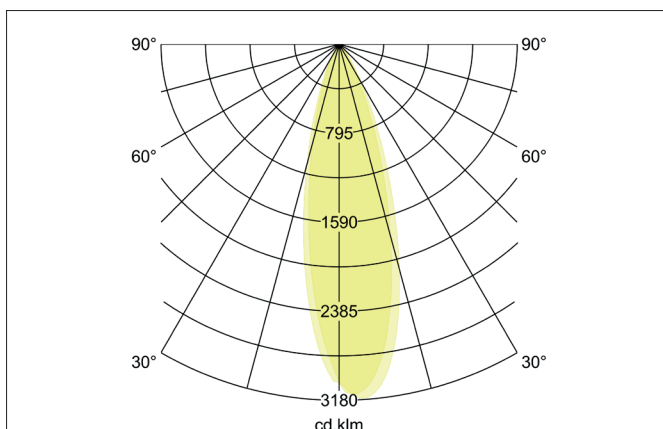
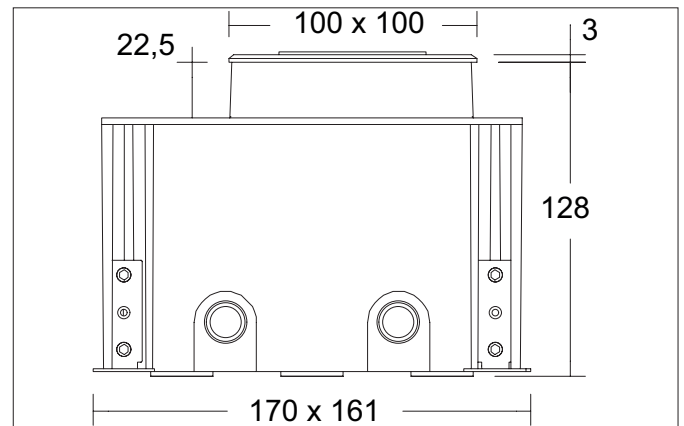



**LANKO-S LED recessed floor light, V4A, IP67, switchable**

Article no. 14694083


**Tender**

LED recessed floor light, V4A, IP67, switchable, Angular. Ceiling cut-out L x W 161 x 170 mm, Installation depth 128 mm, Length 100 mm, Width 100 mm, Weight 1,085 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent Luminous flux 460 lm, Power 1 x 4 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, , Colour: black, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP67, shock resistance according to IEC62262: IK08 .With electronic driver, on/off swit-

**Product Benefits**

- Lens can be tilted 30° in both directions.


**LANKO-S LED recessed floor light, V4A, IP67, switchable**

Article no. 14694083

| Article data                  |                                                                                                                          |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Article no.                   | 14694083                                                                                                                 |
| GTIN                          | 4255752501510                                                                                                            |
| Series name                   | LANKO-S                                                                                                                  |
| Short description             | LED recessed floor light, V4A, IP67, switchable                                                                          |
| Colour                        | black                                                                                                                    |
| Shape                         | Angular                                                                                                                  |
| Length                        | 100 mm                                                                                                                   |
| Width                         | 100 mm                                                                                                                   |
| Built-in length               | 161 mm                                                                                                                   |
| Built-in width                | 170 mm                                                                                                                   |
| Installation depth            | 128 mm                                                                                                                   |
| Hight                         | 3 mm                                                                                                                     |
| Scope of delivery             | incl. converter for connection to 230 V mains voltage, switchable, floor installation pot and 1,000 mm connection cable. |
| Weight                        | 1.085 kg                                                                                                                 |
| Length of the connection line | 1,000 mm                                                                                                                 |
| Conformance                   | CE, UKCA                                                                                                                 |

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 3.000 K   |
| Light colour                 | white     |
| Light output                 | Direct    |
| Luminous flux                | 460 lm    |
| System efficiency            | 115 lm/W  |
| Colour rendering             | CRI > 80  |
| Beam angle                   | 30°       |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 4 W                                                                                                                                                      |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP67                                                                                                                                                     |
| Ambient temperature                   | -20°C up to +45°C                                                                                                                                        |
| Dimmable                              | No                                                                                                                                                       |
| Control                               | on/off                                                                                                                                                   |
| Length of the connection line         | 1,000 mm                                                                                                                                                 |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 50,000 h                                                                                                                                                 |
| Energy efficiency class               | not required                                                                                                                                             |


**LANKO-S LED recessed floor light, V4A, IP67, switchable**  
 Article no. 14694083

| Mounting technology         |                   |
|-----------------------------|-------------------|
| Mounting method             | Recessed mounting |
| Place of installation       | Floor-mounted     |
| Adjustability               | Pivoted           |
| Swivel angle                | 30°               |
| Rotation angle              | 30°               |
| Max. load                   | 1,000 kg          |
| Over rollable               | No                |
| Impact resistance           | IK08              |
| Cover                       | Glass transparent |
| Circlip                     | Without circlip   |
| Suitable for through-wiring | Yes               |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 1.3 kg                                                                                                                                                                                                                                                                                                                                                                         |
| Length of packaging     | 205 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 205 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging height        | 160 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |