

panel mounting socket outlet, straight - flange 75x75,  
fixing centers 60x60




| Product description       |                                        |
|---------------------------|----------------------------------------|
| BALS-Prd.-Nr              | 13011                                  |
| EAN                       | 4024941130110                          |
| Product category          | Panel mounting socket outlet, straight |
| Current                   | 32A                                    |
| Number of poles           | 4p                                     |
| Arrangement of phases     | 3P+PE                                  |
| Position of earth contact | 6 h                                    |
| Voltage                   | 380 - 415V~                            |

| Product description            |                                                                  |
|--------------------------------|------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                          |
| Protection degree              | IP44                                                             |
| Colour code                    | red RAL 3000                                                     |
| Colour of appliance            | Hinged lid red RAL 3000, Enclosure grey RAL 7035                 |
| Connection design              | with screw terminal                                              |
| Maximum conductor size         | 10,0 qmm                                                         |
| Cable entry                    | other                                                            |
| Height                         | 90mm                                                             |
| Width                          | 75mm                                                             |
| Depth                          | 99mm                                                             |
| Flange size vertical in mm     | 75mm                                                             |
| Flange size horizontal in mm   | 75mm                                                             |
| Drill hole dist. vertical mm   | 60mm                                                             |
| Drill hole dist. horizontal mm | 60mm                                                             |
| Material of enclosure          | Polyamide                                                        |
| Contacts                       | The contact carrier is made of polyamide, The contacts are brass |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.199 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941130110 |
| Length         | 99 mm         |
| Width          | 75 mm         |
| Height         | 90 mm         |
| Weight         | 0.2 kg        |
| Volume         | 1,190.135 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941840996 |
| Length         | 258 mm        |
| Width          | 183 mm        |
| Height         | 212 mm        |
| Weight         | 2.142 kg      |
| Volume         | 8,750 ccm     |

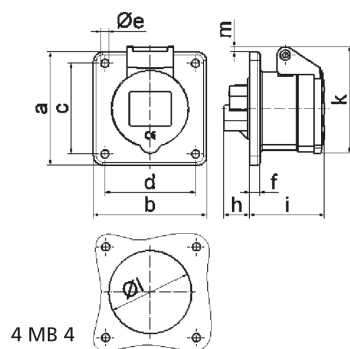

| Ampere         | 16   | 16   | 16   | 32   | 32   | 32   |  |
|----------------|------|------|------|------|------|------|--|
| Polzahl        | 3    | 4    | 5    | 3    | 4    | 5    |  |
| a              | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 |  |
| b              | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 |  |
| c              | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 |  |
| d              | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 |  |
| e ø            | 5,5  | 5,5  | 5,5  | 5,5  | 5,5  | 5,5  |  |
| f              | 7,0  | 7,0  | 7,0  | 8,0  | 8,0  | 8,0  |  |
| h              | 17,0 | 26,0 | 17,0 | 36,0 | 36,0 | 19,0 |  |
| i              | 51,0 | 53,0 | 53,0 | 62,0 | 62,0 | 62,0 |  |
| k              | 70,0 | 80,0 | 85,0 | 90,0 | 90,0 | 98,0 |  |
| l ø            | 45,0 | 45,0 | 55,0 | 60,0 | 60,0 | 60,0 |  |
| m              | 3,5  | 7,0  | 11,5 | 12,0 | 12,0 | 17,0 |  |
| Leiter mm² min | 1,5  | 1,5  | 1,5  | 2,5  | 2,5  | 2,5  |  |
| Leiter mm² max | 4    | 4    | 4    | 10   | 10   | 10   |  |