BRUMBERG
Light. Since 1873.

ADREA LED floor luminaire, microprismatic cover, with indirect light component

Article no. 77450694

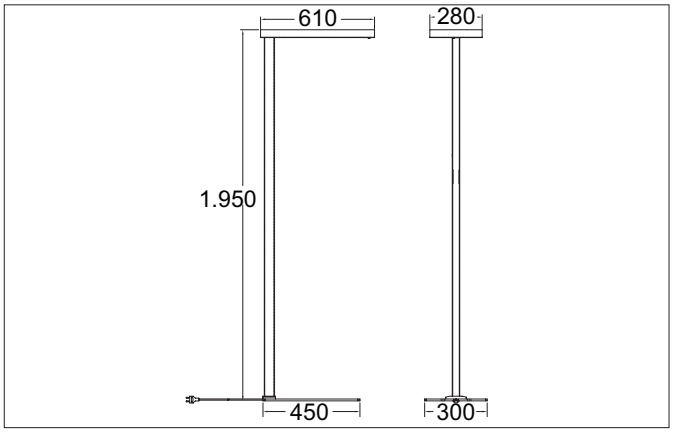

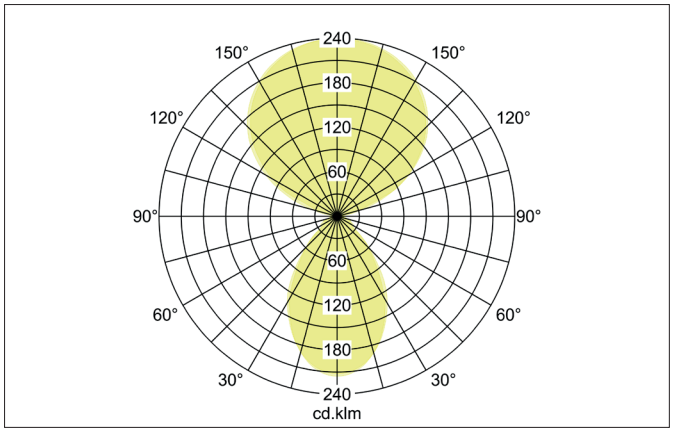

Tender
LED floor luminaire, microprismatic cover, with indirect light component, Rectangular.Luminaire length 610.0 mm, Luminaire width 280.0 mm, Hight 42.0 mm Weight 14.0 kg, with rotattionssymmetrical, deep, wide distributed light intensity. Cover plastic, opalLuminous flux 6.000 lm, UGR < 19, Power 60 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Steel / Plastic, Colour: silver structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI dimmable.

Article data	
Article no.	77450694
GTIN	4251433982999
Series name	ADREA
Short description	LED floor luminaire, microprismatic cover, with indirect light component
Material	Aluminium / Steel / Plastic
Colour	silver structure
Type of surface	Structure
Shape	Rectangular
Length	610 mm
Width	280 mm
Hight	42 mm
Scope of delivery	Delivery: incl. 2,000 mm supply cable with angled safety plug
Weight	14 kg
Conformance	CE

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 14.08.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG
Light. Since 1873.

ADREA LED floor luminaire, microprismatic cover, with indirect light component

Article no. 77450694

Lighting technology	
Colour temperature	4.000 K
Light colour	white
Light output	Direct/Indirect
Luminous flux	6,000 lm
System efficiency	100 lm/W
Colour rendering	CRI > 80
Glare evaluation	UGR < 19
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	60 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED exchangeable
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	DALI
Bulb change possible	No
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Floor-mounted
Adjustability	Not adjustable
Cover	Plastic, opal

Packing data	
Gross weight	16 kg
Length of packaging	1,190 mm
Packaging width	400 mm
Packaging hight	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 14.08.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/