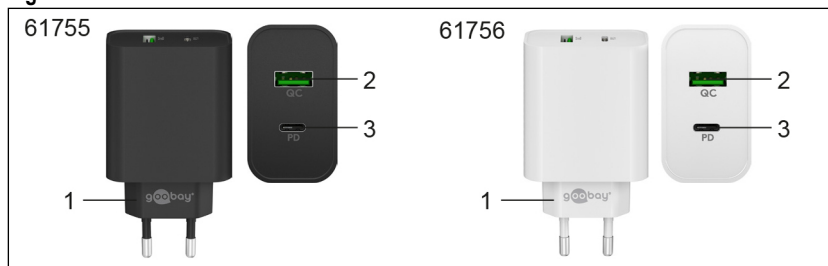
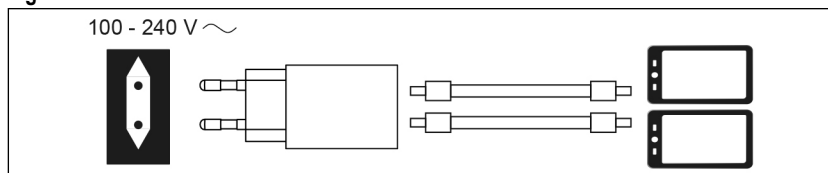


Fig. 1

**Technische Daten / Specifications / Spécifications / Specifiche / Datos técnicos /
Technische gegevens / Tekniske data / Tekniska data / Technická data / Dane techniczne**

Item number	61755	61756
Connections	Euro plug (Type C, CEE 7/16), USB-A QC (Quick Charge) socket, USB-C™ PD (Power Delivery) socket	
Input	100-240 V ~, 50/60 Hz, 1.5 A	
Output USB-C™ PD	5.0 V —, 3.0 A, 15.0 W; 9.0 V —, 3.0 A, 27.0 W; 12.0 V —, 3.0 A, 36.0 W; 15.0 V —, 3.0 A, 45.0 W; 20.0 V —, 2.25 A, 45.0 W	
Output USB-A QC	5.0 V —, 3.0 A, 15.0 W; 9.0 V —, 2.0 A, 18.0 W	
Total Output	45.0 W max.	
Average active efficiency	85.7 %	
Efficiency at low load (10 %)	80.3 %	
No-load power consumption	0.17 W	
Protection class	II 	
Dimensions	93.8 x 50 x 28.5 mm	
Weight	118 g	
Colour	black	white

Fig. 2

**Verwendete Symbole / Symbols used / Symboles utilisés / Simboli utilizzati /
Simbolos utilizados / Gebruikte symbolen / Brugte symboler / Använda symboler /
Použité symboly / Stosowane symbole**

For indoor use only	IEC 60417- 5957	
Alternating current	IEC 60417- 5032	
Direct current	IEC 60417- 5031	
Class II equipment	IEC 60417- 5172	