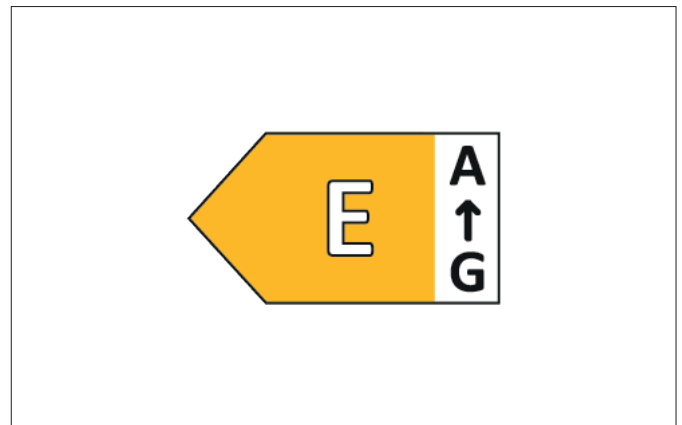
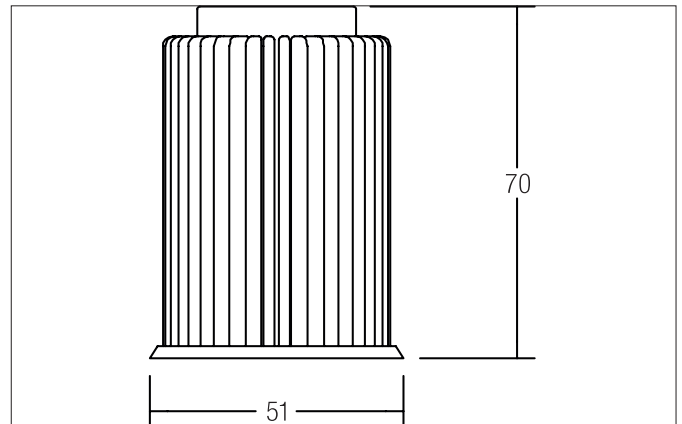



LED reflector insert MR16, 12 W, CRI>80, 350 mA
 Article no. 12954003

Tender

LED reflector insert MR16, 12 W, CRI>80, 350 mA, black / aluminum matt, Round. Lamp holder: Plug&Play, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Power: 12 W, Amount of light sources / fittings: 1 piece, Luminous flux: 1.360 lm, Colour temperature: 3.000 K, Light colour: white, Beam angle: 38°, Type of dimming: Depending on driver.

Article data	
Article no.	12954003
GTIN	4250047793175
Short description	LED reflector insert MR16, 12 W, CRI>80, 350 mA
Material	Aluminium / Glass
Colour	black / aluminum matt
Shape	Round
Outer diameter	51 mm
Height	70 mm
Weight	0.143 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Luminous flux	1,360 lm
Colour rendering	CRI > 80
Reflector	High-gloss
Beam angle	38°
Light sharing	Symmetric



LED reflector insert MR16, 12 W, CRI>80, 350 mA
Article no. 12954003

Packing data	
Gross weight	0.161 kg
Length of packaging	60 mm
Packaging width	60 mm
Packaging hight	83 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.


LED reflector insert MR16, 12 W, CRI>80, 350 mA

Article no. 12954003

Required accessories

Article no.: 17613000

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&Play

Dimensions: 115 mm x 34 mm x 19 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf

Article no.: 17613020

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&Play + Anschlussbox

Dimensions: 115 mm x 34 mm x 19 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf

Article no.: 17621000

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&Play

Dimensions: 128 mm x 50 mm x 13 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf

Article no.: 17621020

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&Play + Anschlussbox

Dimensions: 128 mm x 50 mm x 13 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf

Article no.: 17664000

LED converter 350 mA, trailing-edge phase dimmable

Power: 10,2 - 14 W, Plug&Play

Dimensions: 125 mm x 51 mm x 20 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17664000_2021_DE.pdf

Article no.: 17664020

LED converter 350 mA, trailing-edge phase dimmable

Power: 10,2 - 14 W, Plug&Play + Anschlussbox

Dimensions: 125 mm x 51 mm x 20 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17664020_2021_DE.pdf

Article no.: 17643000

LED converter 350 mA, trailing-edge phase dimmable

Power: 8,8 - 18 W, Plug&Play

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17643000_2021_DE.pdf

Article no.: 17643020

LED converter 350 mA, trailing-edge phase dimmable

Power: 8,8 - 18 W, Plug&Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17643020_2021_DE.pdf

Article no.: 17648000

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&Play

Dimensions: 166 mm x 46 mm x 34 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf

Article no.: 17648020

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&Play + Anschlussbox

Dimensions: 166 mm x 46 mm x 34 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf


LED reflector insert MR16, 12 W, CRI>80, 350 mA

Article no. 12954003

Required accessories

Article no.: 17657000

LED converter 350 mA, 1-10 V dimmable (analog)

Power: 5,2 - 18 W, Plug&Play

Dimensions: 110 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf

Article no.: 17683000

LED converter 350 mA, DALI dimmable (digital)

Power: 3,5 - 17 W, Plug&Play

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf

Article no.: 17683020

LED converter 350 mA, DALI dimmable (digital)

Power: 3,5 - 17 W, Plug&Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf

Article no.: 17671000

LED converter 350mA, ZigBee dimmable

Power: 3,5 - 18,5 W, Plug&Play

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf

Article no.: 17671020

LED converter 350mA, ZigBee dimmable

Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf

Article no.: 17672000

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&Play

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf

Article no.: 17672020

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf

Article no.: 17682000

LED converter 350 mA, DALI dimmable (digital)

Power: 1,8 - 18,5 W, Plug&Play

Dimensions: 146.5 mm x 43.5 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf

Article no.: 17682020

LED converter 350 mA, DALI dimmable (digital)

Power: 1,8 - 18,5 W, Plug&Play + Anschlussbox

Dimensions: 146.5 mm x 43.5 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf



BRUMBERG

Light. Since 1873.

LED reflector insert MR16, 12 W, CRI>80, 350 mA

Article no. 12954003

Optional accessories

Article no.: 3835

Plug&Play extension cable 350 mA

Dimensions: 500 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf

Article no.: 3836

Plug&Play extension cable 350 mA

Dimensions: 1,000 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf

Article no.: 3837

Plug&Play extension cable 350 mA

Dimensions: 2,000 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf