


LED round converter 350 mA, DALI dimmable (digital)
Article no. 17658000

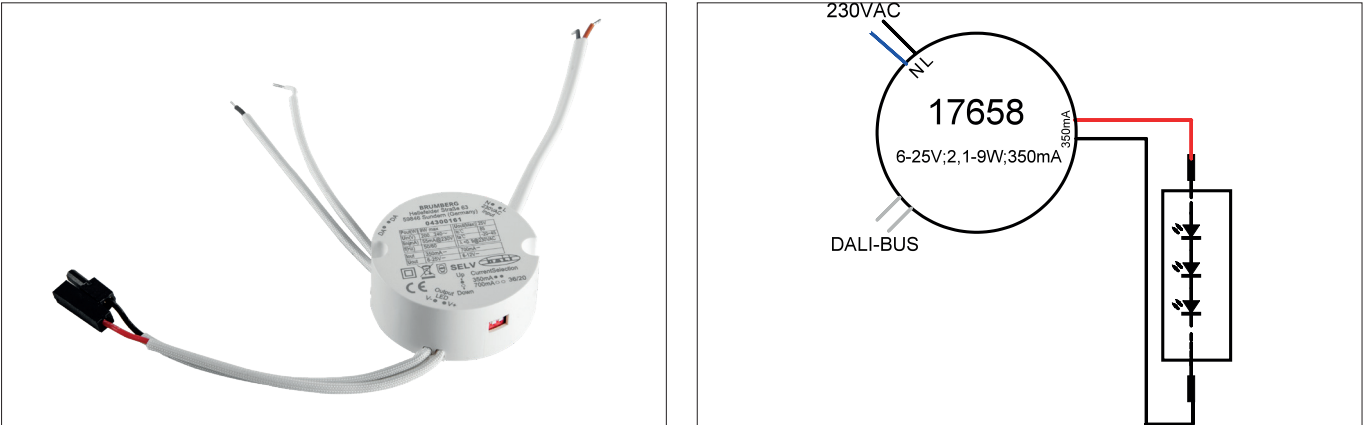

Tender

LED round converter 350 mA, DALI dimmable (digital), white, round. This converter is protected by fuses against overvoltage and short circuit as well as thermal and electrical overload. Material: Plastic, Protection class on room side: according to DIN EN 60529: IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 9 W, Dimmable: Yes, Type of dimming: DALI-2.

Article data	
Article no.	17658000
GTIN	4251433949022
Short description	LED round converter 350 mA, DALI dimmable (digital)
Material	Plastic
Colour	White
Shape	Round
Outer diameter	56 mm
Hight	25 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm
Weight	0.068 kg
Length of the connection line	100 mm
Conformance	CE

LED round converter 350 mA, DALI dimmable (digital)

Article no. 17658000

Operating technology of driver	
AC nominal voltage min	200 V
AC nominal voltage max	240 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	II
Degree of protection	IP20
Power min	2.1 W
Power	9 W
Starting current	2 A
Suitable for emergency lighting	No
measure point (tc)	85 °C
Version	Plug&Play
Power factor	0.9
Output voltage max	25.00 V
Output voltage min.	6.00 V
Control	DALI-2 , PUSH-Dimm
Number of poles	2
Environment temperature (ta)	-20 °C up to +45 °C
Measure point (tc)	max. +85 °C
Output current	350 mA
Length of the connection line	100 mm

Packing data	
Gross weight	0.085 kg
Length of packaging	70 mm
Packaging width	47 mm
Packaging height	81 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>