

## Cable gland

With reduction sealing insert

8161/8-M32-2109 Art. No. 239166



- For safe cable entry in Ex e and Ex i areas
- Can be used at temperatures of between -60 ... +75 °C, degree of protection IP68
- Available in Ex e and Ex i versions (Ex i version distinguished by its blue cap nut)
- Suitable for cable diameters from 1 ... 48 mm
- Versions with multi-seal inserts

WebCode **8161B**



R. STAHL's 8161/7 and 8161/8 series cable entries can be used to safely run cables into Ex e enclosures. They are suitable for cables between 1 and 48 mm in diameter. They are available for Ex e and Ex i circuits – the Ex i version can be distinguished by its blue cap nut. An integrated stopping plug can be used to seal any cable entries that are not being used.

### Technical Data

#### Explosion Protection

Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 14.0011 X
IECEX gas explosion protection	Ex eb IIC Gb
IECEX dust certificate	IECEX PTB 14.0011 X
IECEX dust explosion protection	Ex tb IIIC Db
ATEX gas certificate	PTB 14 ATEX 1008 X
ATEX gas explosion protection	Ex II 2 G Ex eb IIC Gb
ATEX dust certificate	PTB 14 ATEX 1008 X
ATEX dust explosion protection	Ex II 2 D Ex tb IIIC Db
EAC certificate	TS RU S-DE.AA71.B.00083
EAC gas explosion protection	Ex 1 Ex e II Gb X
EAC dust explosion protection	Ex tb IIIC Db X
Certificates	ATEX (PTB), Brazil (ULB), EAC (LPE), IECEX (PTB), Korea (KGS)

#### Electrical Data

Ex version	Ex i
------------	------

#### Ambient Conditions

Ambient temperature	-40 °C ... +75 °C
Use at the height of	< 2000 m

#### Mechanical Data

Degree of protection (IP)	IP66
Degree of protection note	IP68 at 5 bar 30 min. (IP protection according to IEC/EN 60529)
Sealing material	EPDM profile seal
Material sealing ring	EPDM
Material	Polyamide

## Cable gland

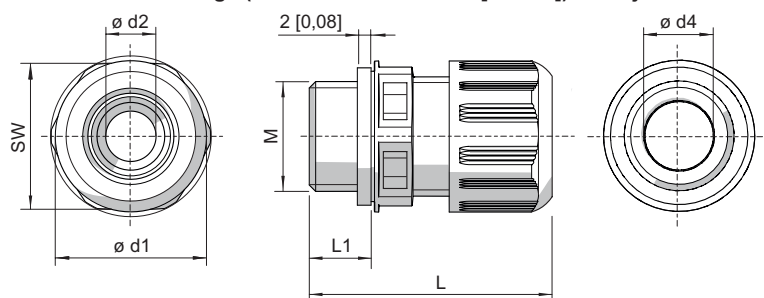
With reduction sealing insert

8161/8-M32-2109 Art. No. 239166

### Mechanical Data

Material 2	Glass fibre reinforced
Silicone-free	Yes
Self-extinguishing	Yes
Flame retardant	Yes
Halogen-free	Yes
Surface resistance	$\leq 10^{13} \Omega$
Clamping range	9 – 21 mm
Clamping range max.	21 mm
Clamping range min.	9 mm
Armouring type	Unarmoured cable types
Dimension L	42 ... 50 mm
Dimension d1	40 mm
Dimension d2	21.3 mm
Dimension d4	21.3 mm
Width across corners	40 mm
Width across flats	36 mm
Thread size	M32
Thread length	12 mm
Thread pitch	1,5 mm
Impact strength	7 J
Impact strength	7 J
Colour	Blue
Lot size	25
Weight	0.032 kg
Weight	0.07 lb

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



M = Thread size  
 SW = Width across flats  
 L1 = Thread length  
 L = Dimension L

### Cable glands without bend protection

Thread size	Width across flats	Dimension L	Dimension L (with long thread)	Thread length	Thread length (long thread)	Clamping range	Clamping range + reduction sealing insert	Dimension d1	Dimension d2	Dimension d4
M12	16,00 mm	29 ... 34 mm	35 ... 40 mm	9,000 mm	15,000 mm	3,00 - 6,00 mm	1,00 - 6,00 mm	18 mm	7,3 mm	6,3 mm

# Installation Equipment and Accessories



## Cable gland

With reduction sealing insert


8161/8-M32-2109 Art. No. 239166

M16	20.00 mm	31 ... 37 mm	37 ... 43 mm	9.000 mm	15.000 mm	5.00 - 9.00 mm	2.00 - 9.00 mm	22 mm	10.3 mm	9.3 mm
M20	24.00 mm	36 ... 43 mm	41 ... 48 mm	10.000 mm	15.000 mm	7.00 - 13.00 mm	4.00 - 13.00 mm	27 mm	13.3 mm	13.3 mm
M25	29.00 mm	38 ... 46 mm	43 ... 51 mm	10.000 mm	15.000 mm	10.00 - 17.00 mm	7.00 - 17.00 mm	32 mm	17.3 mm	17.3 mm
M32	36.00 mm	42 ... 50 mm	45 ... 53 mm	12.000 mm	15.000 mm	13.00 - 21.00 mm	9.00 - 21.00 mm	40 mm	21.3 mm	21.3 mm
M40	46.00 mm	52 ... 65 mm	58 ... 71 mm	12.000 mm	18.000 mm	17.00 - 28.00 mm	12.00 - 28.00 mm	51 mm	28.3 mm	30 mm
M50	55.00 mm	59 ... 72 mm	63 ... 76 mm	14.000 mm	18.000 mm	23.00 - 35.00 mm	16.00 - 35.00 mm	61 mm	35.3 mm	40 mm
M63	68.00 mm	64 ... 78 mm	67 ... 81 mm	15.000 mm	18.000 mm	34.00 - 48.00 mm	28.00 - 48.00 mm	75 mm	48.3 mm	53 mm

## Accessories and Spare Parts


### Flat gasket (standard), EPDM (-40 ... +75 °C)

#### Replacement seals for cable glands

		Art. No.
	For cable glands 8161/-M32-21 Lot size: 100 Connection thread: M32	222373
	For cable glands 8161/-M32-21 Lot size: 50 Connection thread: M32	222366


### Locknut, brass nickel-plated (-60 ... +75 °C)

#### To fasten the cable glands in through holes

		Art. No.
	Material: Nickel-plated brass Lot size: 50 Thread size: M32	241562


### Plug (-60 ... +75 °C)

#### For closing unused cable glands


		Art. No.
	Thread size with reduction sealing insert: M32 Lot size: 50 Diameter: 14 mm Material: Polyamide	240050
	Thread size without reduction sealing insert: M32 Lot size: 25 Thread size with reduction sealing insert: M40 Diameter: 20 mm Material: Polyamide	240057

### Reduction sealing insert (standard), EPDM (-40 ... +75 °C)

#### For cable glands

		Art. No.
	Connection thread: M32 x 1.5 Lot size: 50 Clamping range: 9 – 14 mm	239448

### Special key

		Art. No.
	Thread size: M32 Packaging unit: 1	114209

# Installation Equipment and Accessories



## Cable gland


With reduction sealing insert

8161/8-M32-2109 Art. No. 239166

### Flat gasket silicone (-60 ... +75°C)

Replacement seals for low temperature

Art. No.



For cable glands 8161/-M32-21 Lot size: 100  
Connection thread: M32

240251

### Locknut, plastic (-40 ... +75 °C)

To fasten the cable glands in through holes

Art. No.




Material: Polyamide Lot size: 100  
Thread size: M32

239464

### Reduction sealing insert, silicone (-60 ... +75 °C)

For low temperature

Art. No.



Connection thread: M32 x 1.5 Lot size: 50  
Clamping range: 9 – 14 mm

239456

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.